

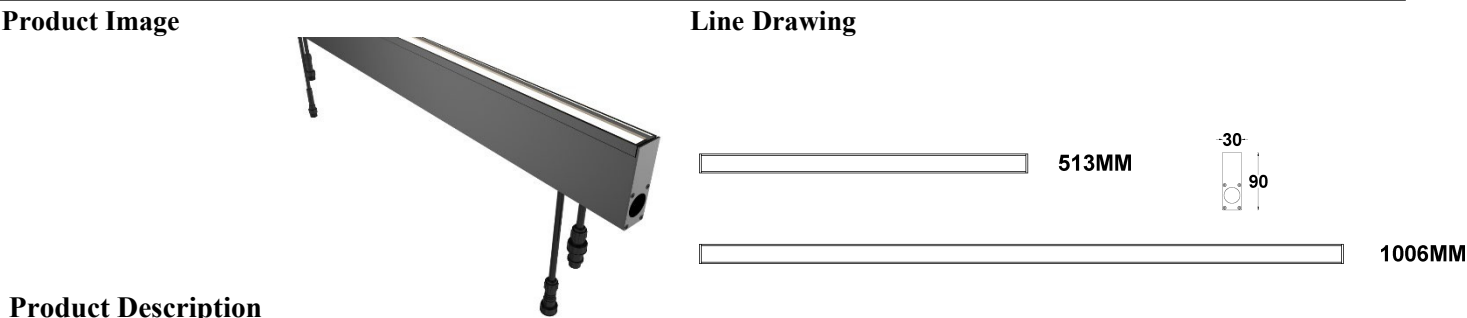
FUEGO PRO- MODEL: AEIL2

In-ground Luminaires

WAC LIGHTING

PROJECT:

TYPE:



Product Description

The Fuego Pro series buried lights are perfectly embedded and installed, with good consistency in light output, surface light output, and no visible light source particle sensation. The lamps are suitable for residential areas, hotels, squares, parks, and courtyards, and are suitable for local and decorative lighting.

Product Features

- Body Material:

Aluminum extruded lamp body, aluminum die cast end cover
- Optical System:

Milky white optical glass
- Finish:

electrostatic powder coating
- Adjustable Angle:
- Accessories:

Including embedded parts
- Certification:

CQC
- IP Rating:

IP67
- Insulation Level:

Class III
- Operating Temperature:

-20°C~50°C

Product Specifications

- LED Type:

SMD
- Light source power:

11W (Max)
- Source Lm:

2700K 1100lm: 3000K 1200lm; 4000K 1300lm
- LED Lifetime:

>50000h-L70 / B10-Ta25°C(LM-80 / TM-21)
- CCT/CRI:

2700K, Ra80 / 3000K, Ra80 / 4000K, Ra80 / RGB
- SDCM:

3 SDCM
- Input:

24V DC
- Dimming:

ON-OFF or DMX512 dimming control
- Net Weight:

Approximately 2.8kg, without packaging

Order Model

Model	Length (mm)	Power (W)	LEDs (quantity)	Max Lumens (lm)	Control Systems	Beam	Phase Controller (m)	CCT	Finish
AEIL210-12	1006	11(Max)	120	764	ET ON-OFF 24V DC Power Supply	F Frosted	0 W/O Phase	27 2700K	BK Black GY Gray
AEIL205-06	513	6(Max)	60	357				30 3000K 40 4000K	

Example: AEIL210-12ETF027BK

FUEGO PRO- MODEL: AEIL2

In-ground Luminaires

WAC LIGHTING





PROJECT:

TYPE:

Model	Length (mm)	Power (W)	LEDs (quantity)	Max Lumens (lm)	Control Systems	Beam	Phase Controller (m)	CCT	Finish
AEIL210-12	1006	11(Max)	120	764	MT DMX512 Dimming 24V DC Power Supply	F Frosted	1 1 Phase 4 4 Phase	27 2700K	BK Black GY Gray
AEIL205-06	513	6(Max)	60	357				30 3000K 40 4000K FC RGB	

Example: AEIL210-12MTF127BK

accessory

Item	Description	Pic	Mounting
AEIL2-RC059-BK	Recessed casing 513mm BK		
AEIL2-RC059-GY	Recessed casing 513mm GY		
AEIL2-RC100-BK	Recessed casing 1006mm BK		
AEIL2-RC100-GY	Recessed casing 1006mm GY		
AEIL2-PC-CT002F	ET Female connector		
AEIL2-PC-CT002M	ET Male connector		
AELC3-SC-CT002F	MT Female connector		
AELC3-SC-CT002M	MT Male connector		

FUEGO PRO- MODEL: AEIL2


In-ground Luminaires

WAC LIGHTING


PROJECT:

TYPE:

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



MODEL:	AEIL210-12ETF027BK
BEAM ANGLE:	115°
POWER:	13.4W
LUMENS:	763.6 lm
CBCP:	/
EFFICACY:	56.8 lm /W



MODEL:	AEIL205-06ETF027BK
BEAM ANGLE:	115°
POWER:	6.8W
LUMENS:	357 lm
CBCP:	/
EFFICACY:	52.5 lm /W