

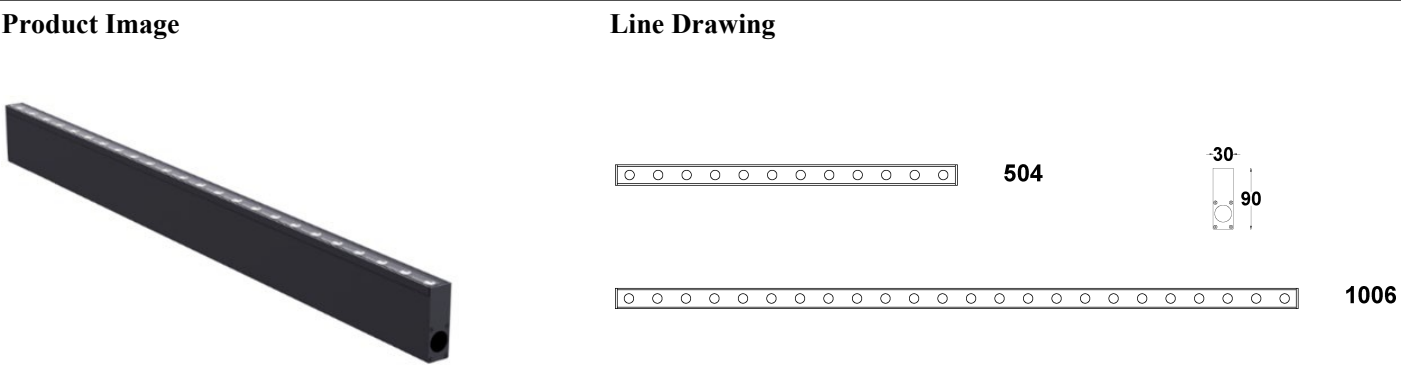
FUEGO PRO- MODEL: AEIL2

In-ground Luminaires

WAC LIGHTING

PROJECT:

TYPE:



Product Description

Fuego Pro series buried lights, aluminum extruded body, aluminum die cast end cover, simple and beautiful appearance, perfect, embedded installation, providing multiple angles of symmetrical and asymmetrical lighting according to different application scenarios. Specially equipped with anti glare accessories, the anti glare effect is excellent, and the lights are suitable for residential areas, hotels, squares, parks, and courtyards, etc.

Product Features	Product Specifications
• Body Material: Aluminum extruded lamp body, aluminum die cast end cover • Optical System: lens • Finish: electrostatic powder coating • Adjustable Angle: / • Accessories: Including embedded parts • Certification: CQC • IP Rating: IP67 • Insulation Level: Class III • Operating Temperature:-20°C~50°C	• LED Type: Medium Power LED • Light source power: 24W (Max) • Source Lm: 3000K 2760lm • LED Lifetime: >50000h-L70 / B10-Ta25°C(LM-80 / TM-21) • CCT/CRI: 2700K, 3000K, 4000K, Ra80 • SDCM: 3 SDCM • Input: 24V DC • Dimming: ON-OFF or DMX512 dimming control • Net Weight: Approximately 2.8kg, without packaging

Order Model								
Model	Length (mm)	Power (W)	LEDs (quantity)	Max Lumens (lm)	Control Systems	Beam	CCT	Finish
AEIL205-12	504	12(Max)	12	665	ET ON-OFF 24V DC Power Supply	2 20° 3 30°	27 2700K 30 3000K	BK Black
AEIL210-24	1006	24(Max)	24	1330	MT DMX512 Dimming 24V DC Power Supply	J 20°x45°	40 4000K	GY Gray

Example: AEIL210-24ET227BK

FUEGO PRO- MODEL: AEIL2




In-ground Luminaires

WAC LIGHTING



PROJECT:

TYPE:

accessory

Item	Description	Pic	Mounting
AEIL2-RC050-BK	Recessed casing 504mm BK		
AEIL2-RC050-GY	Recessed casing 504mm GY		
AEIL2-RC100-BK	Recessed casing 1006mm BK		
AEIL2-RC100-GY	Recessed casing 1006mm GY		
AEIL2-PC-CT002F	ET Female connector		
AEIL2-PC-CT002M	ET Male connector		
AEIL2-CC-CT002F	MT Female connector		
AEIL2-CC-CT002M	MT Male connector		

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

	MODEL:	AEIL210-24MT230BK		MODEL:	AEIL210-24MT330BK
	BEAM ANGLE:	26°		BEAM ANGLE:	33°
	POWER:	24W (Max)		POWER:	24W (Max)
	LUMENS:	1244 lm		LUMENS:	1330 lm
	CBCP:	/		CBCP:	/
	EFFICACY:	46 lm /W		EFFICACY:	49 lm /W


FUEGO PRO- MODEL: AEIL2

In-ground Luminaires


WAC LIGHTING

PROJECT:

TYPE:



MODEL:	AEIL205-12MT230BK
BEAM ANGLE:	26°
POWER:	12W (Max)
LUMENS:	622 lm
CBCP:	/
EFFICACY:	46 lm /W



MODEL:	AEIL205-12MT330BK
BEAM ANGLE:	33°
POWER:	12W (Max)
LUMENS:	665 lm
CBCP:	/
EFFICACY:	49 lm /W

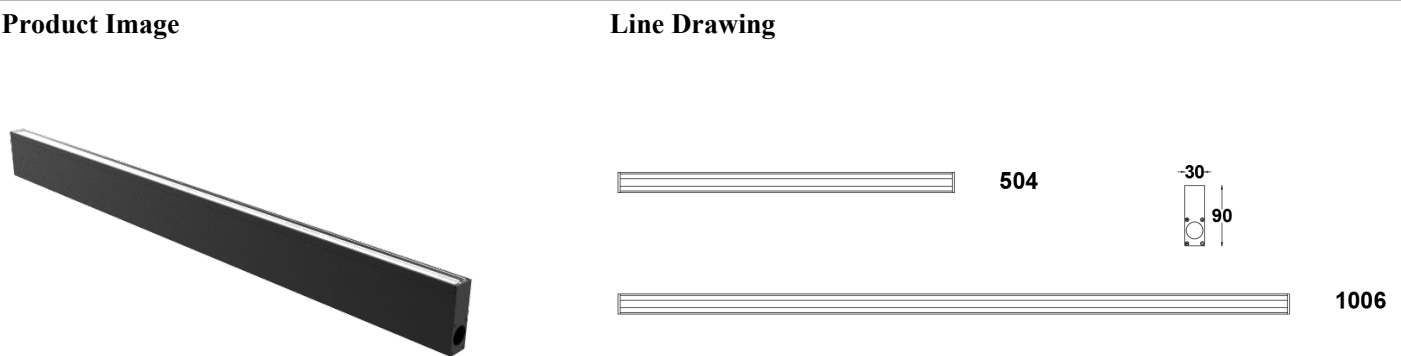
FUEGO PRO- MODEL: AEIL2

In-ground Luminaires

WAC LIGHTING

PROJECT:

TYPE:



Product Description

Fuego Pro series buried lights, aluminum extruded body, aluminum die cast end cover, simple and beautiful appearance, perfect, embedded installation, providing multiple angles of symmetrical and asymmetrical lighting according to different application scenarios. Specially equipped with anti glare accessories, the anti glare effect is excellent, and the lights are suitable for residential areas, hotels, squares, parks, and courtyards, etc.

Product Features

- Body Material: Aluminum extruded lamp body, aluminum die cast end cover
- Optical System: lens
- Finish: electrostatic powder coating
- Adjustable Angle: /
- Accessories: Including embedded parts
- Certification: CQC
- IP Rating: IP67
- Insulation Level: Class III
- Operating Temperature:-20°C~50°C

Product Specifications

- LED Type: Medium Power LED
- Light source power:24W (Max)
- Source Lm: 3000K 2760lm
- LED Lifetime: >50000h-L70 / B10-Ta25°C(LM-80 / TM-21)
- CCT/CRI: 2700K, 3000K, 4000K, Ra90
- SDCM: 3 SDCM
- Input: 24V DC
- Dimming: ON-OFF or DMX512 dimming control
- Net Weight: Approximately 2.8kg, without packaging

Order Model

Model	Length (mm)	Power (W)	LEDs (quantity)	Max Lumens (lm)	Control Systems	Beam	CCT	Finish
AEIL205-12	504	12(Max)	12	642	ET ON-OFF 24V DC Power Supply	1 10° Integrated lens	27 2700K 30 3000K	BK Black GY Gray
AEIL210-24	1006	24(Max)	24	1284	MT DMX512 Dimming 24V DC Power Supply		40 4000K	

Example: AEIL210-24ET127BK

FUEGO PRO- MODEL: AEIL2

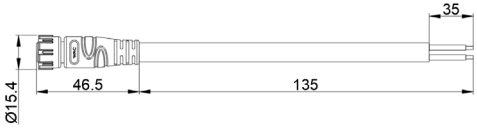


In-ground Luminaires

WAC LIGHTING


PROJECT:

TYPE:

ACCESSORY

Item	Description	Pic	Mounting
AEIL2-RC050-BK	Recessed casing 504mm BK		
AEIL2-RC050-GY	Recessed casing 504mm GY		
AEIL2-RC100-BK	Recessed casing 1006mm BK		
AEIL2-RC100-GY	Recessed casing 1006mm GY		
AEIL2-PC-CT002F	ET Female connector		
AEIL2-PC-CT002M	ET Male connector		
AEIL2-CC-CT002F	MT Female connector		
AEIL2-CC-CT002M	MT Male connector		

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



MODEL:

AEIL205-12MT130BK

BEAM ANGLE:

10°X61°

POWER:

12W (Max)

LUMENS:

642 lm

CBCP:

/

EFFICACY:

52.8 lm /W