

LANNE PRO - MODEL: AER25F

WAC LIGHTING

Recessed Ceiling Luminaires


PROJECT:

TYPE:

Product Image



Line Drawing

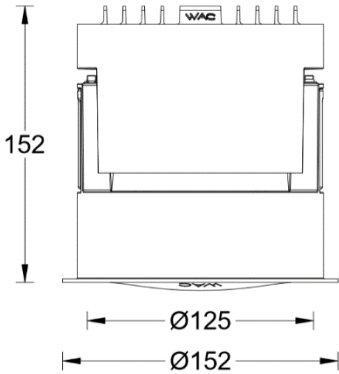

Product Description

LANNE PRO wall wash downlight, the whole light is exquisite and simple, using LiteBrush® optical system, to ensure that there is no dark area on the top of the wall, uniform wall washing, and has a good anti-glare effect. Mainly applicable to hotels and commercial areas..

Product Features

- Body Material: Aluminum alloy die-casting lamp body
- Optical System: Aluminum alloy die-cast lamp body LiteBrush® Light waterfall wall washing system
- Finish: Electrostatic powder spraying
- Projection direction: /
- Accessories/Brackets: /
- Safety certification: CCC
- IP Rating: IP65
- Insulation Level: Class I
- Operating Temperature:-20°C~40°C

Product Specifications

- Opening size: Ø145mm
- Ceiling thickness: 1mm~45mm
- Shading Angle: /
- Light source type: COB
- Source Lm: 3000K:32W 3830lm; 40W 4500lm
- LED Lifetime:>50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K/3000K/3500K/4000K/5000K, Ra90
- SDCM: 3SDCM
- Input voltage: 220V~240V AC/50Hz
- Dimming: No dimmer/0-10V control (must be tested with the project site system in advance)
- Net Weight: 2.16Kg without packing

Order Model

Model	Size	Comment	LED Power	Driver	Beam	CCT	Reflector	Finish
AER2	5 5"	F Frame	32 32W 40 40W	EL On-Off 220V AC Power Supply DL 0-10V Dimming 220V AC Power Supply	W WASH	27 2700K	B Black	WT White
						30 3000K		
						35 3500K		
						40 4000K		
						50 5000K		

Example: AER25F-32ELW30BWT

Accessories

LANNE PRO - MODEL: AER25F

WAC LIGHTING


Recessed Ceiling Luminaires

PROJECT:


TYPE:

/

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



MODEL:	AER25F-32ELW30BWT
BEAM ANGLE:	/
POWER:	35.8W
LUMENS:	2580lm
CBCP:	/
EFFICACY:	72.1lm/W



MODEL:	AER25F-40ELW30BWT
BEAM ANGLE:	/
POWER:	45.5W
LUMENS:	3044lm
CBCP:	/
EFFICACY:	66.9lm/W