

WAC

HOSPITALITY & LIGHTING

2025
INTERNATIONAL

I CONTENTS

01

About WAC
Pg 01-12

02

Project Cases
Pg 13-30

03

Hospitality
& Lighting
Pg 31-38

04

Lighting
Technology
Pg 39-48

05

Products
Introduction
Pg 49-154

01

ABOUT WAC

Shine The Civilization With Responsibility

Lighting is a technology that harnesses the light of inspiration.

Lighting is an art, glowing with the beauty of humanity.

Lighting is a responsibility to help you choose a sustainable lifestyle.

WAC was originated from the United States with a strong commitment to the Chinese market. To breathe new life into antiques, WAC applies cutting-edge lighting technology from around the world to national museums and art venues. As further extend museum lighting technology into other industries, such as hotels, business, education, and residential and landscape architecture.

Shine the Civilization with Responsibility

With museum-quality lighting tech, WAC illuminates further extraordinary spaces!

WAC GLOBAL

Since the founding of the WAC brand in 1984 in New York City, we have been committed to the concept of "Responsible Lighting". With excellent technical strength and outstanding leadership, the brand has developed into a leading global lighting company. In the highly competitive lighting industry, WAC has fully demonstrated its perseverance and entrepreneurial will, pushing the development of high-quality products, leading the pace of lighting technology steadily, and developing products geared to the era and technological innovation.

By requiring in-house product development and manufacturing, investing in optical, structural, and electronic design, research, testing labs, and production facilities, WAC has grown into a distinctive, top-tier lighting brand while remaining committed to raising the bar for industry design and production.

Started as a small business with roots in the community, WAC has grown into a global corporation with strong R&D and manufacturing capabilities, focusing on the latest in LED lighting technology, and continues to provide a diverse range of lighting solutions for museums, high-end hotels, commercial, architectural, landscape, and residential applications.



WAC CHINA


WAC Asia-Pacific headquarters, established in 2010, is located in the international metropolis -Shanghai. The name of WAC in China is "Hua Ge", signifies to perceive the world from a traditional Chinese perspective. With international vision and standard, we aim to create high quality lighting in China. Headquartered in Shanghai, China, the company is responsible for managing all affairs related to market development and sales network. Our sales network is also well established in Beijing, Shenzhen, Chengdu, Wuhan, Hangzhou, Guangzhou and Xi'an.

With professional and passionate service team, a premium customized lighting experience is given to the space. With profound technical background, WAC Lighting provides sustainable lighting solutions and technical applications for museums, high-end hotels, commercial, architectural, landscape, residential and other spaces.

Embracing the concept of "Act Locally, Think Globally", WAC operates an exclusive R&D center and factory in China to create extraordinary lighting experiences for diverse spaces with innovative technology, excellent quality and firstclass service.

Milestones

Tony and Tai Wang founded WAC in 1984 in New York City from community-based retail startups, expanding to permanent showrooms, branches, and offices in Dallas, California, and the West Coast. With continued growth and outstanding leadership, the group has evolved into the leading lighting brand in the world today.

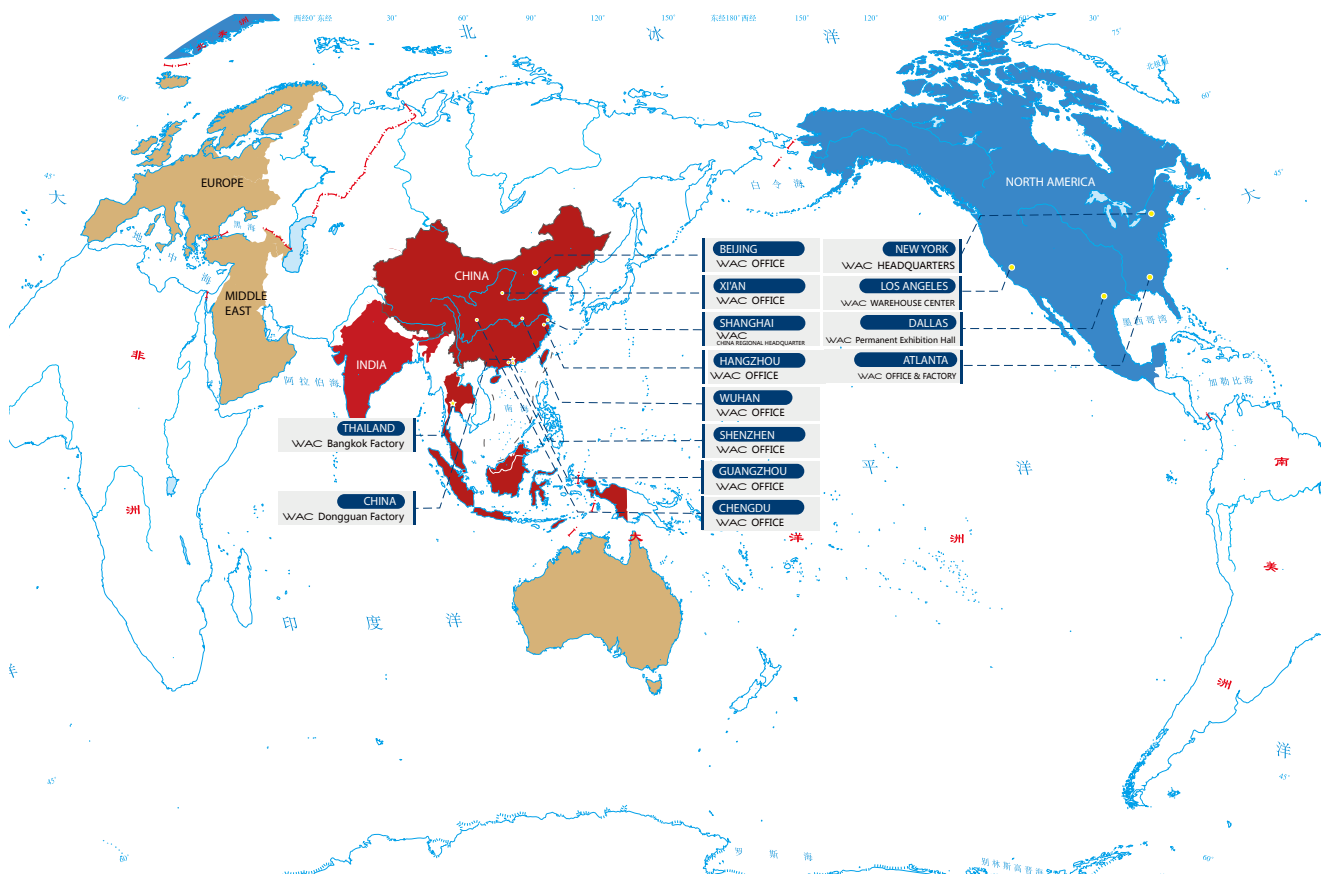

1984

NEW YORK, THE UNITED STATES



Established

1997

DONGGUAN, CHINA



The First Manufacturing Site

2000

CHINESE MARKET EXPANSION



WAC's First Museum Project in China

2014

ATLANTA, THE UNITED STATES



Branch Office

2024


40TH ANNIVERSARY OF THE BRAND

40 YEARS
OF
EXCELLENCE

Forty Years of Responsibility

1993

DALLAS, THE UNITED STATES



Permanent Showroom

1998

CALIFORNIA, THE UNITED STATES



West Coast Branch Office

2010

SHANGHAI, CHINA



Asia-Pacific Regional Headquarter
Meanwhile, Beijing Branch, Shenzhen, Wuhan, Chengdu,
Guangzhou and other offices have been added.

2021


BANGKOK, THAILAND



PRODUCTION STARTED

 **SCHONBEK** 1870

Acquisition of Century-old Luxury Crystal Brand
SCHONBEK


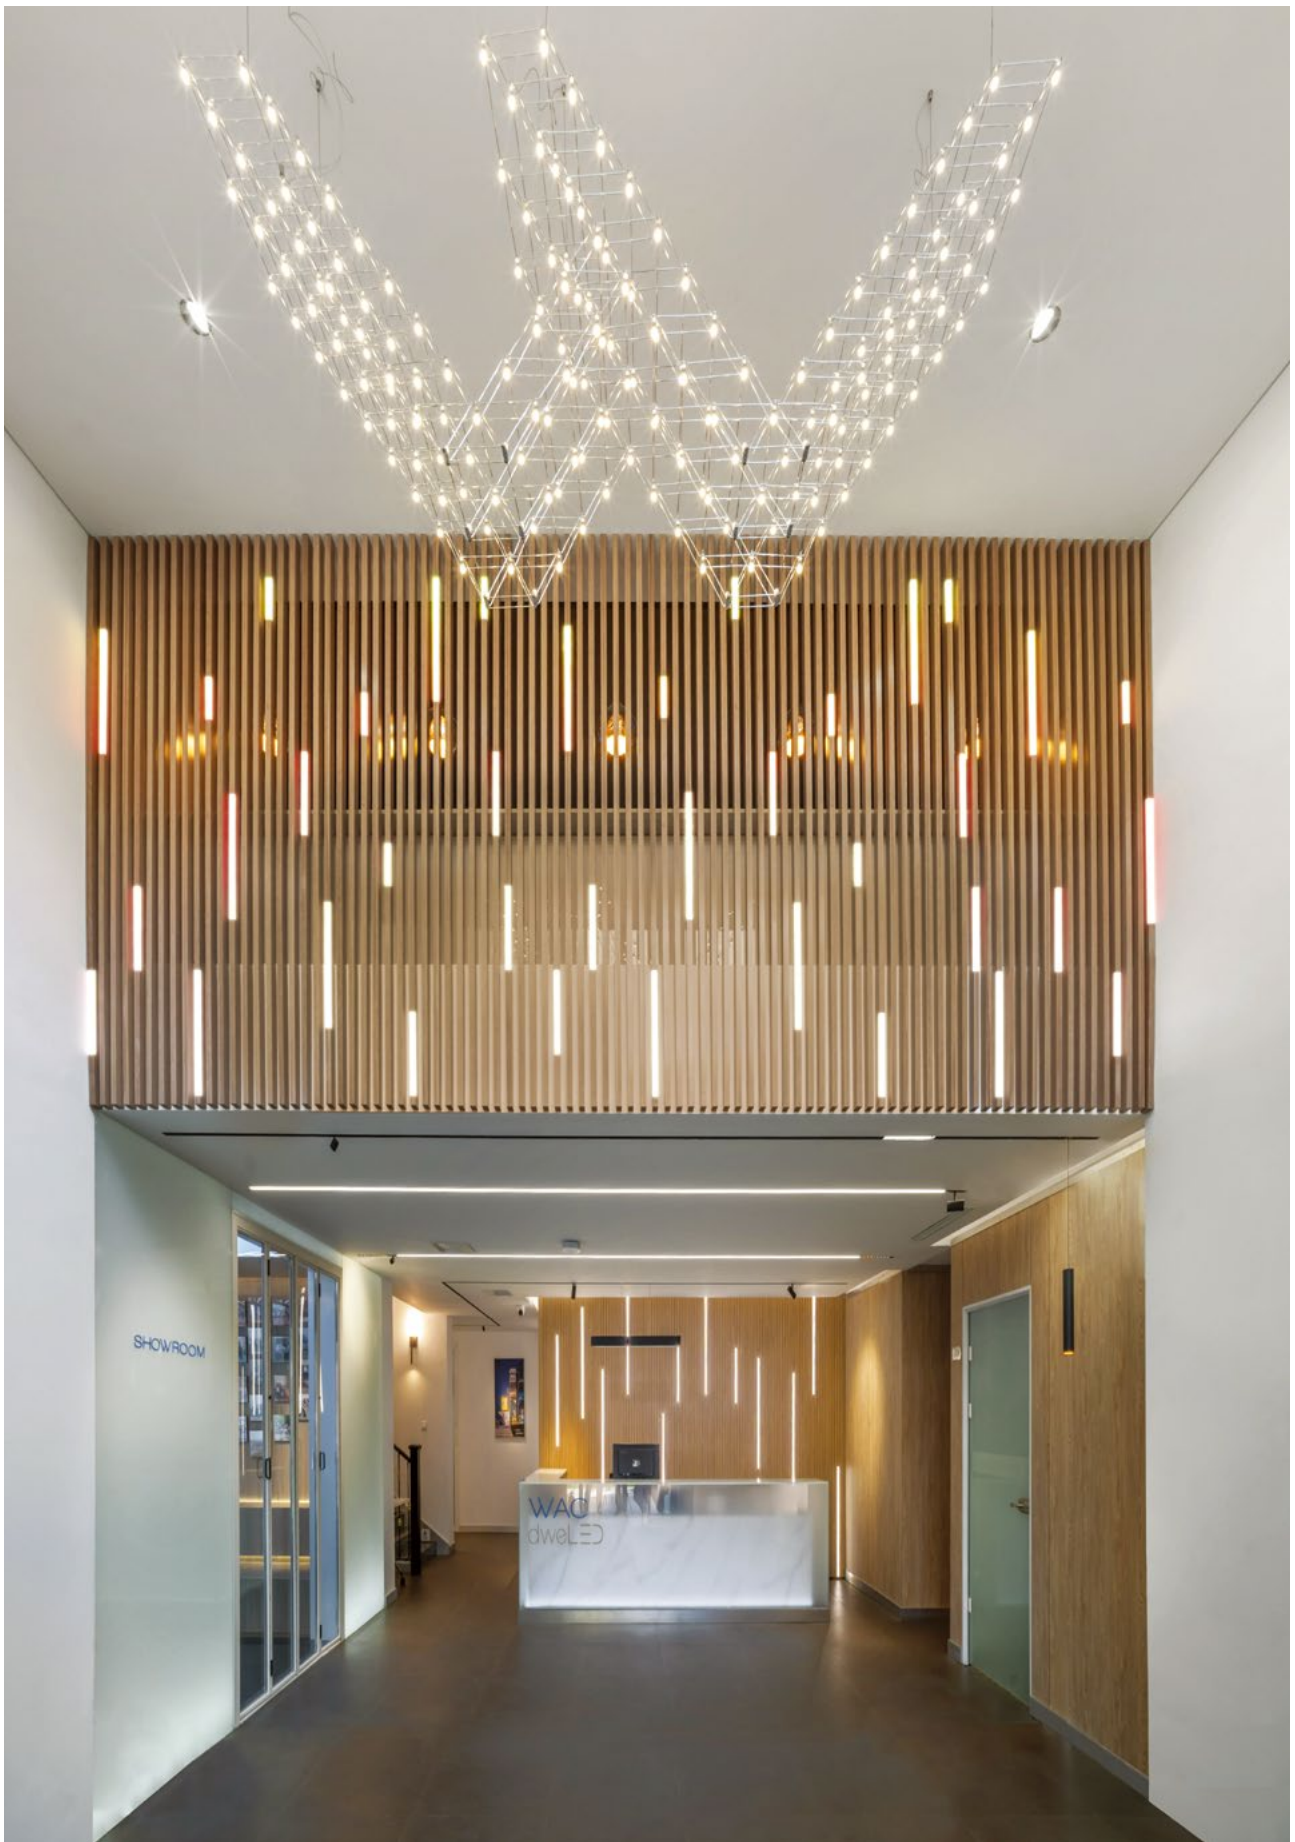


WAC China Showroom

The Shanghai showroom of WAC China is an all-inclusive display space that blends environment, technology, merchandise, and sceneries. Here, the scenarios have been thoughtfully created to complement the surroundings and ambiance of the products in addition to the products being presented in the best possible position. The showroom is made more contemporary and technologically advanced by the use of high-tech components, allowing customers to experience the items' cutting-edge charm on an instinctive level.



Manufacturing

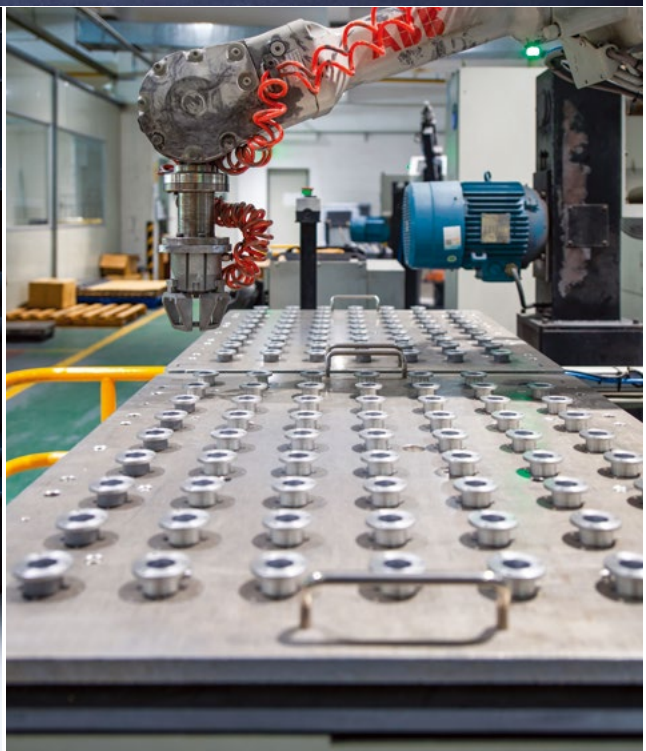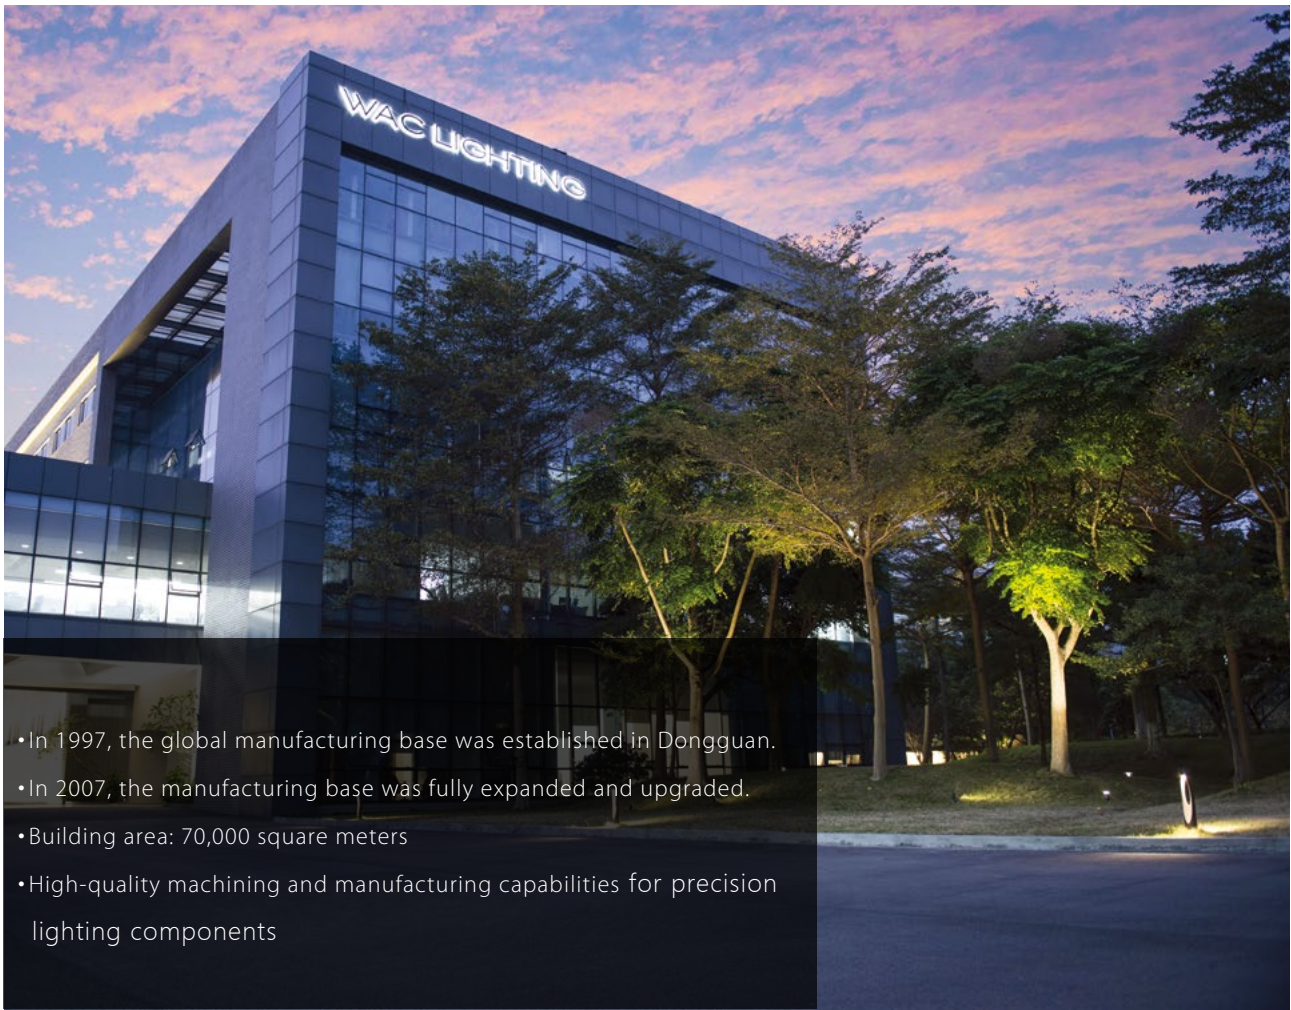



- In 2021, the Thailand factory started operation.
- 57,700 square meters of manufacturing space.
- Sustainable production and manufacturing
- Advanced modular materials and construction techniques ensure that the interior is fully insulated and recycled to minimize carbon footprint.



Patented Technology

360+ Patents

104+ Patents of Invention

The highest priority is given to the patented "SUBROSA® Invisible Light Technology", which has been successfully applied in a wide range of products.

199+ Utility Model

Numerous utility patents have been succeeded in projects and recognized by clients and designers.

58+ Appearance Patents

Distinctive exterior design of the product

Laboratory Qualifications



ISO9001 Quality System Certificate



CTC Authorized Laboratory Accreditation



Title 24 Laboratory Accreditation



ISO14001 Environmental Management System Certification



U.S. National Laboratory NVLAP Accreditation



UL Authorized Laboratory Accreditation



High-tech Enterprise Designation



ETL Authorized Laboratory Accreditation



U.S. ENERGY STAR Lab Accreditation



Green Zero-Carbon Factory



China CNAS Laboratory Accreditation

02

PROJECT CASES

Chongqing Westin Hotel
Chongqing Poly Crowne Plaza Chongqing
Guangyang Island Dyson Hotel Chongqing
Hyatt Regency
Chongqing Condor Wyndham Hotel
Chongqing Regent Hotel
Chongqing Radisson Blu Hotel Chongqing
Wellington Hotel
Chongqing Banyan Tree Hotel Chongqing
Zhongye Miramar Hotel Beijing Beijing Hotel
Beijing Military Science and Technology
Museum Hotel
Beijing Ligong Hotel
Beijing Ligong International Hotel Beijing
Ritan Hotel
Beijing Capital Airport Kandex Hotel
Beijing Tieshimen Huishengge Club Beijing
Southwest Huayi Hotel
Beijing Yanqing Splendid International
Resort Hotel
Beijing Yutang Crowne Plaza
Beijing Yucai Marriott Hotel
Beijing Chaolin International Hotel Beijing
Diaoyutai Hotel/Beijing Mansion Park
Beijing Guozijiai Art Hotel
Beijing Yanqi Lake Boutique Hotel Beijing
Jingxi Hotel
Beijing Kunlun Hotel
Beijing Lingang Hotel
Shanghai Portman Hotel
Shanghai Disneyland Hotel
Shanghai Pudong Shangri-La
Shanghai JW Marriott Marquis
Shanghai Jade Lakeville Junior Residence


Shanghai Sheraton Jiading Hotel
Shanghai Lujiazui Royal Bridge Hotel Shanghai
Rock Bund Source
Shanghai InterContinental Lake Malaren
Shanghai W Shanghai on the Bund Shanghai
Xijiao Hotel
Shanghai Langham Xintiandi
Shanghai Yan'an Hotel
Shanghai Langham Place Yangpu
Shanghai J-Hotel Shanghai Center Shanghai
Jinjiang Hotel Shanghai Center Shanghai
Pullman Shanghai Zhongxingcheng Shanghai
Mandarin Oriental Shanghai Shanghai
Yueju Hotel & Accenture Hotel in Lingang
International Conference Center Shanghai
Hengshan Hotel
Shanghai Jinjiang Hotel
Shanghai Rock Garden
Anhui Huangshan De Mao Tang
Anhui Jiuhuashan De Mao Tang
Anhui Longzi Lake Hotel
Anhui Huangshan Banyan Tree
Fujian Chengde Jiahe Hotel
Fujian Jinjiang Garden Century Hotel Fujian
Xiamen Wuyuan Shuixiang Hotel Fujian
Zhangzhou Rongxin Crowne Plaza Hotel
Fujian Portman Hotel
Fujian Waldorf Astoria Xiamen Guangdong
Crowne Plaza Poly Jiangmen Guangdong
Wyndham Hotel Dongguan Guangdong
Guangzhou Yunzhu Hotel Guangdong
Guangzhou Changlong Hotel Guangdong
Huizhou Boluo Courtyard Hotel Guangdong
Huizhou Haiyan Sanatorium Hotel


Guangdong Jieyang Marriott Hotel
Guangdong Lvjing Xiyuewan Garden
Guangdong Meilin Lake Hotel Guangdong
Shenzhen Donghai International Center
Hotel
Guangdong Shenzhen Sea Conrad Hotel
Guangdong Shenzhen Huasheng Hilton
Hotel
Guangdong Shenzhen Royal Court Hotel
Guangdong Shenzhen Pinghu Kewei Hotel
Guangdong Shenzhen Marriott Hotel
Guangdong Shenzhen Venice Hotel Guang-
dong Shenzhen Star River Ji Hotel Guang-
dong Shenzhen Star River Ritz Carlton Hotel
Guangdong Shenzhen Star River Yabao
Boutique Hotel
Guangdong Vanke Reunion Cave Cloud
City Business Boutique Hotel Guangdong
Sheraton Hotel
Guangdong Yangjiang Poly Hotel Guang-
dong Yunzhu Hotel
Guangdong Zhuhai Dong'aodao Marriott
Resort
Guangdong Hilton Hotel Haijunda Center
Guangdong Lakeview One
Guangdong Shenzhen Convention & Exhi-
bition Zhaohua InterContinental Hotel
Guizhou Anshun Hilton Yulin Hotel Guizhou
GUIYANG BELT HOTEL Guizhou GUIYANG
AMPER HOTEL Guizhou GUIYANG GRAND
CLOUD SKY HOTEL
Hainan Hainan Hilton Hotel
Hainan Sanya Haitang Bay Sunshine Holiday
Inn

Hainan Sanya Haitang Bay Yin Hai 80 Henan Le
 Meridien Hotel Zhengzhou
 Hainan Hyatt Regency Sanya Wenbo Park Hainan
 Taikang House - Sanya Haitang Bay Hotel
 Hebei Hebei Lotus Holiday Inn
 Hebei Yanqihu Golden Goose Kempinski Hotel
 Henan Henan Sheraton Luohe Hotel Henan Jianye
 Nanyang Holiday Inn Henan Kaifeng Pullman Hotel
 Henan Radisson Hotel Zhengzhou
 Henan Four Seasons Hotel Zhengzhou Henan Yuda
 Guomao Hotel Zhengzhou Heilongjiang Holiday Inn
 Harbin Interfontaine
 Hubei Hubei Wuhan Sheraton Panhai Hotel Hubei
 Wuhan Donghu Hotel
 Hubei Wuhan Heshe Restaurant
 Hunan Wyndham Grand Plaza Hotel Hunan Venice
 Hotel Yongzhou
 Hunan Crowne Plaza Zhangjiajie Nabari Hunan As-
 cott Residence Changsha Hunan Sheraton Changde
 Hotel
 Jiangsu Renaissance Changzhou Lanyue Bay Star
 River Hotel
 Jiangsu Changzhou New Town Hilton Hotel Jiangsu
 Jiangyin Pullman Hotel
 Jiangsu Jiangyin Minghao Mountain Resort Jiangsu
 Nanjing Shenghe Mansion Deluxe Selection Hotel
 Jiangsu Nanjing Intercontinental Yincheng Hotel
 Jiangsu Suzhou IFC Hotel
 Jiangsu Suzhou Jinji Lake State Guesthouse Jiangsu
 Suzhou Jinji Lake Xinluo International Hotel
 Jiangsu Suzhou Hyatt Regency Jinhe Hotel Jiangsu
 Suzhou Renheng Business Club Jiangsu Suzhou
 Taihu Park Resort

Jiangsu Suzhou Shangri-La Hotel
 Jiangsu Suzhou Yangcheng Peninsula Hotel
 Indigo
 Jiangsu Suzhou Yilin Hilton Hotel
 Jiangsu Wuxi Hyatt Regency Hotel
 Jiangsu Zhangjiagang Marriott Hotel Jiangsu
 Nanjing Weifu 302 Hotel Jiangsu Nantong
 Marriott Hotel Jiangsu Suzhou Wuzhong Four
 Points by Sheraton
 Jiangxi Nanchang Suning Intercontinental Hotel
 Liaoning Shenyang Shangri-La Hotel Inner
 Mongolia Ordos Tongchuang Hotel
 Shandong Jinan Luneng City Link Mansion
 Shandong Weihai Easy Bay International Busi-
 ness Hotel Block A Shandong Badaguan Hotel
 Shandong Jinan Lixia Headquarters Business
 Hotel (Juntin)
 Shanxi Pullman Hotel
 Shanxi Gaoping Hotel
 Shanxi Changzhi Wanda Jinhua Hotel Shaanxi
 Xi'an Haoxianglai International Hotel
 Shaanxi Xi'an Lefu Hotel
 Shaanxi Xi'an Tianyi Mansion Fine Shaanxi Xi'an
 Xipai Habitat
 Shaanxi Xi'an Hilton Hotel
 Sichuan Chengdu Li Kuan Hotel Sichuan
 Chengdu Ritz-Carlton Sichuan Chengdu Madi-
 son Hotel Apartment
 Sichuan Chengdu Hotel Nikko Sichuan
 Chengdu Hilton
 Sichuan Chengdu Xiongfei Hotel Sichuan
 Chengdu Ascott
 Sichuan Pengzhou Xinyi Ascott Sichuan
 Chengdu Fulton Kellett Hotel Sichuan Tianfu
 Erjie Hilton

Xinjiang Kashi Hotel
 Xinjiang Radisson Blu Hotel
 Yunnan Kunming Gudian Resort & Spa Yunnan Kun-
 ming Hortai Garden Hotel Yunnan Dali Tiangu Xiyuan
 Jiangsu Yangzhou Crowne Plaza
 Yunnan Dali Tiangu Xiyuan Monument Boutique Hotel
 Zhejiang Anji Taoxiangju Hotel Zhejiang Dongyang
 Zhongtian Jiangjingyuan II Hotel
 Zhejiang Fuchunjiang Tonglu Lijun Hotel
 Zhejiang Hangzhou Park Hyatt Hotel Zhejiang Hang-
 zhou Hilton Eastern International Hotel
 Zhejiang Zhejiang Hangzhou Four Seasons Hotel
 Zhejiang Zhejiang Hangzhou Marriott Xianghu Hotel
 Zhejiang Nanxun Shenxiang Hotel Zhejiang Ningbo
 Langham Place Hotel Zhejiang Ningbo Qianhu Hotel
 Zhejiang Thousand Islands Lake Resort Zhejiang
 Shaoxing Hotel II
 Zhejiang Shaoxing Zhuji Hilton Hotel Zhejiang Wen-
 zhou Marriott Hotel Zhejiang Wuzhen Resort Innshe
 Country Hotel
 Zhejiang West Lake Lakeside Estate Hotel
 Zhejiang Xianghu Indigo Hotel Zhejiang Jinhua Mar-
 riott Hotel Zhejiang Ningbo CURLY Hotel Zhejiang
 Shaoxing Anhua Zhou Mansion
 Zhejiang WuXunFang Hotel Apartment Zhejiang
 ZheXingJu JiangNanVilla Zhejiang HangZhou HuaH-
 ang Hotel Zhejiang TongXiang GaoQiao Tourism Plaza
 Hotel
 Zhejiang WuZhen Dishang Resort Hotel Jiangsu Wuxi
 Radisson Blu Hotel Jiangsu Wujiang Dongtaihu Hot
 Spring Resort
 Jiangsu Xuzhou Xinsheng Marriott Hotel
 Jiangsu Crowne Plaza Xuzhou

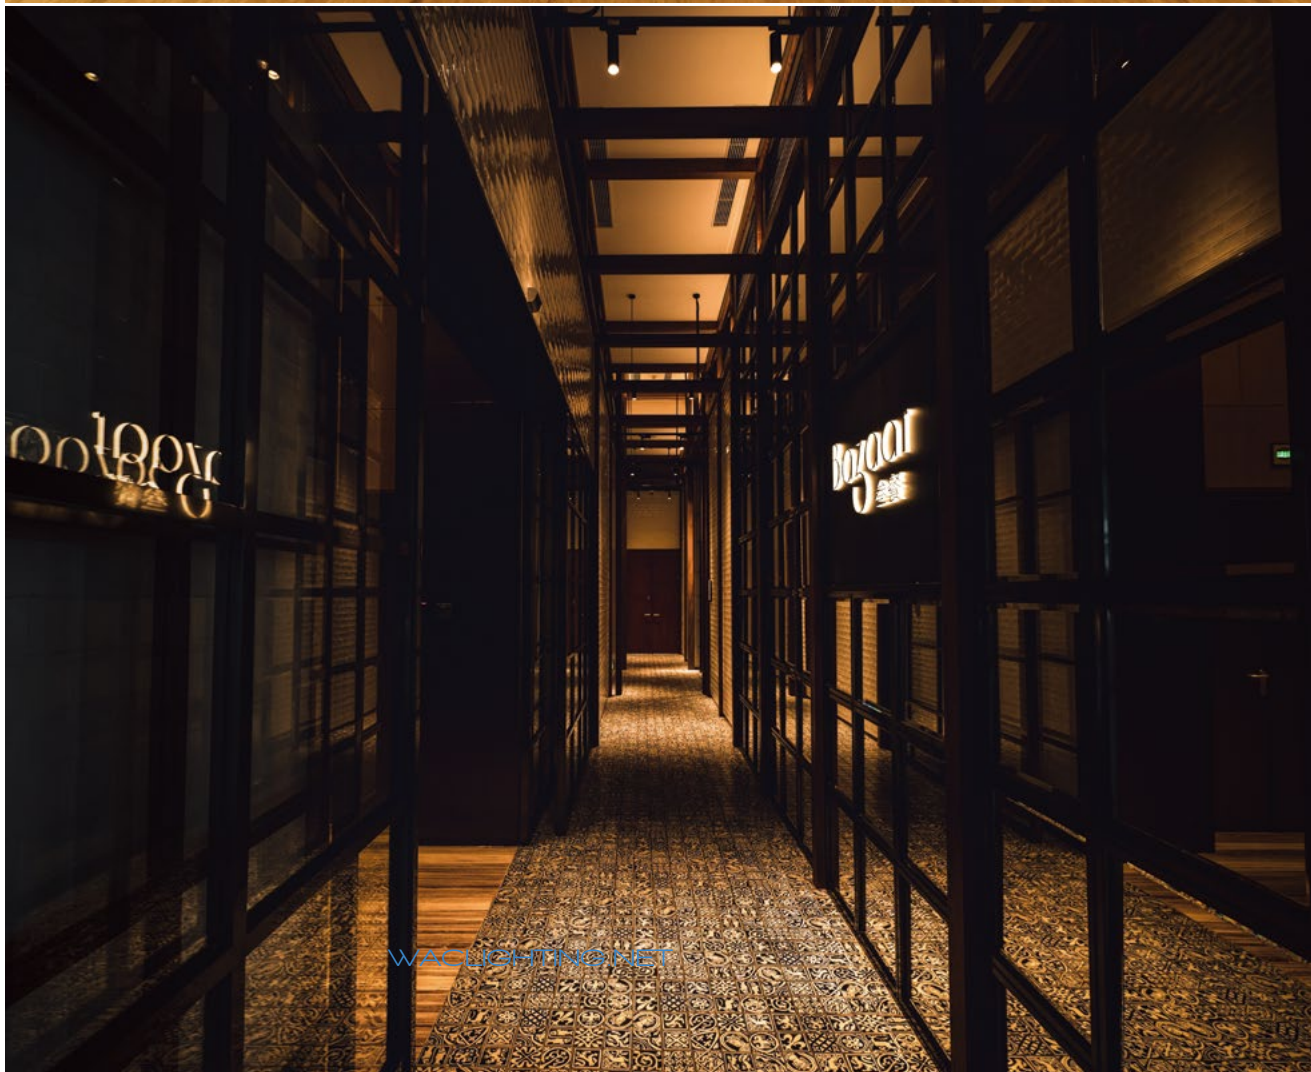

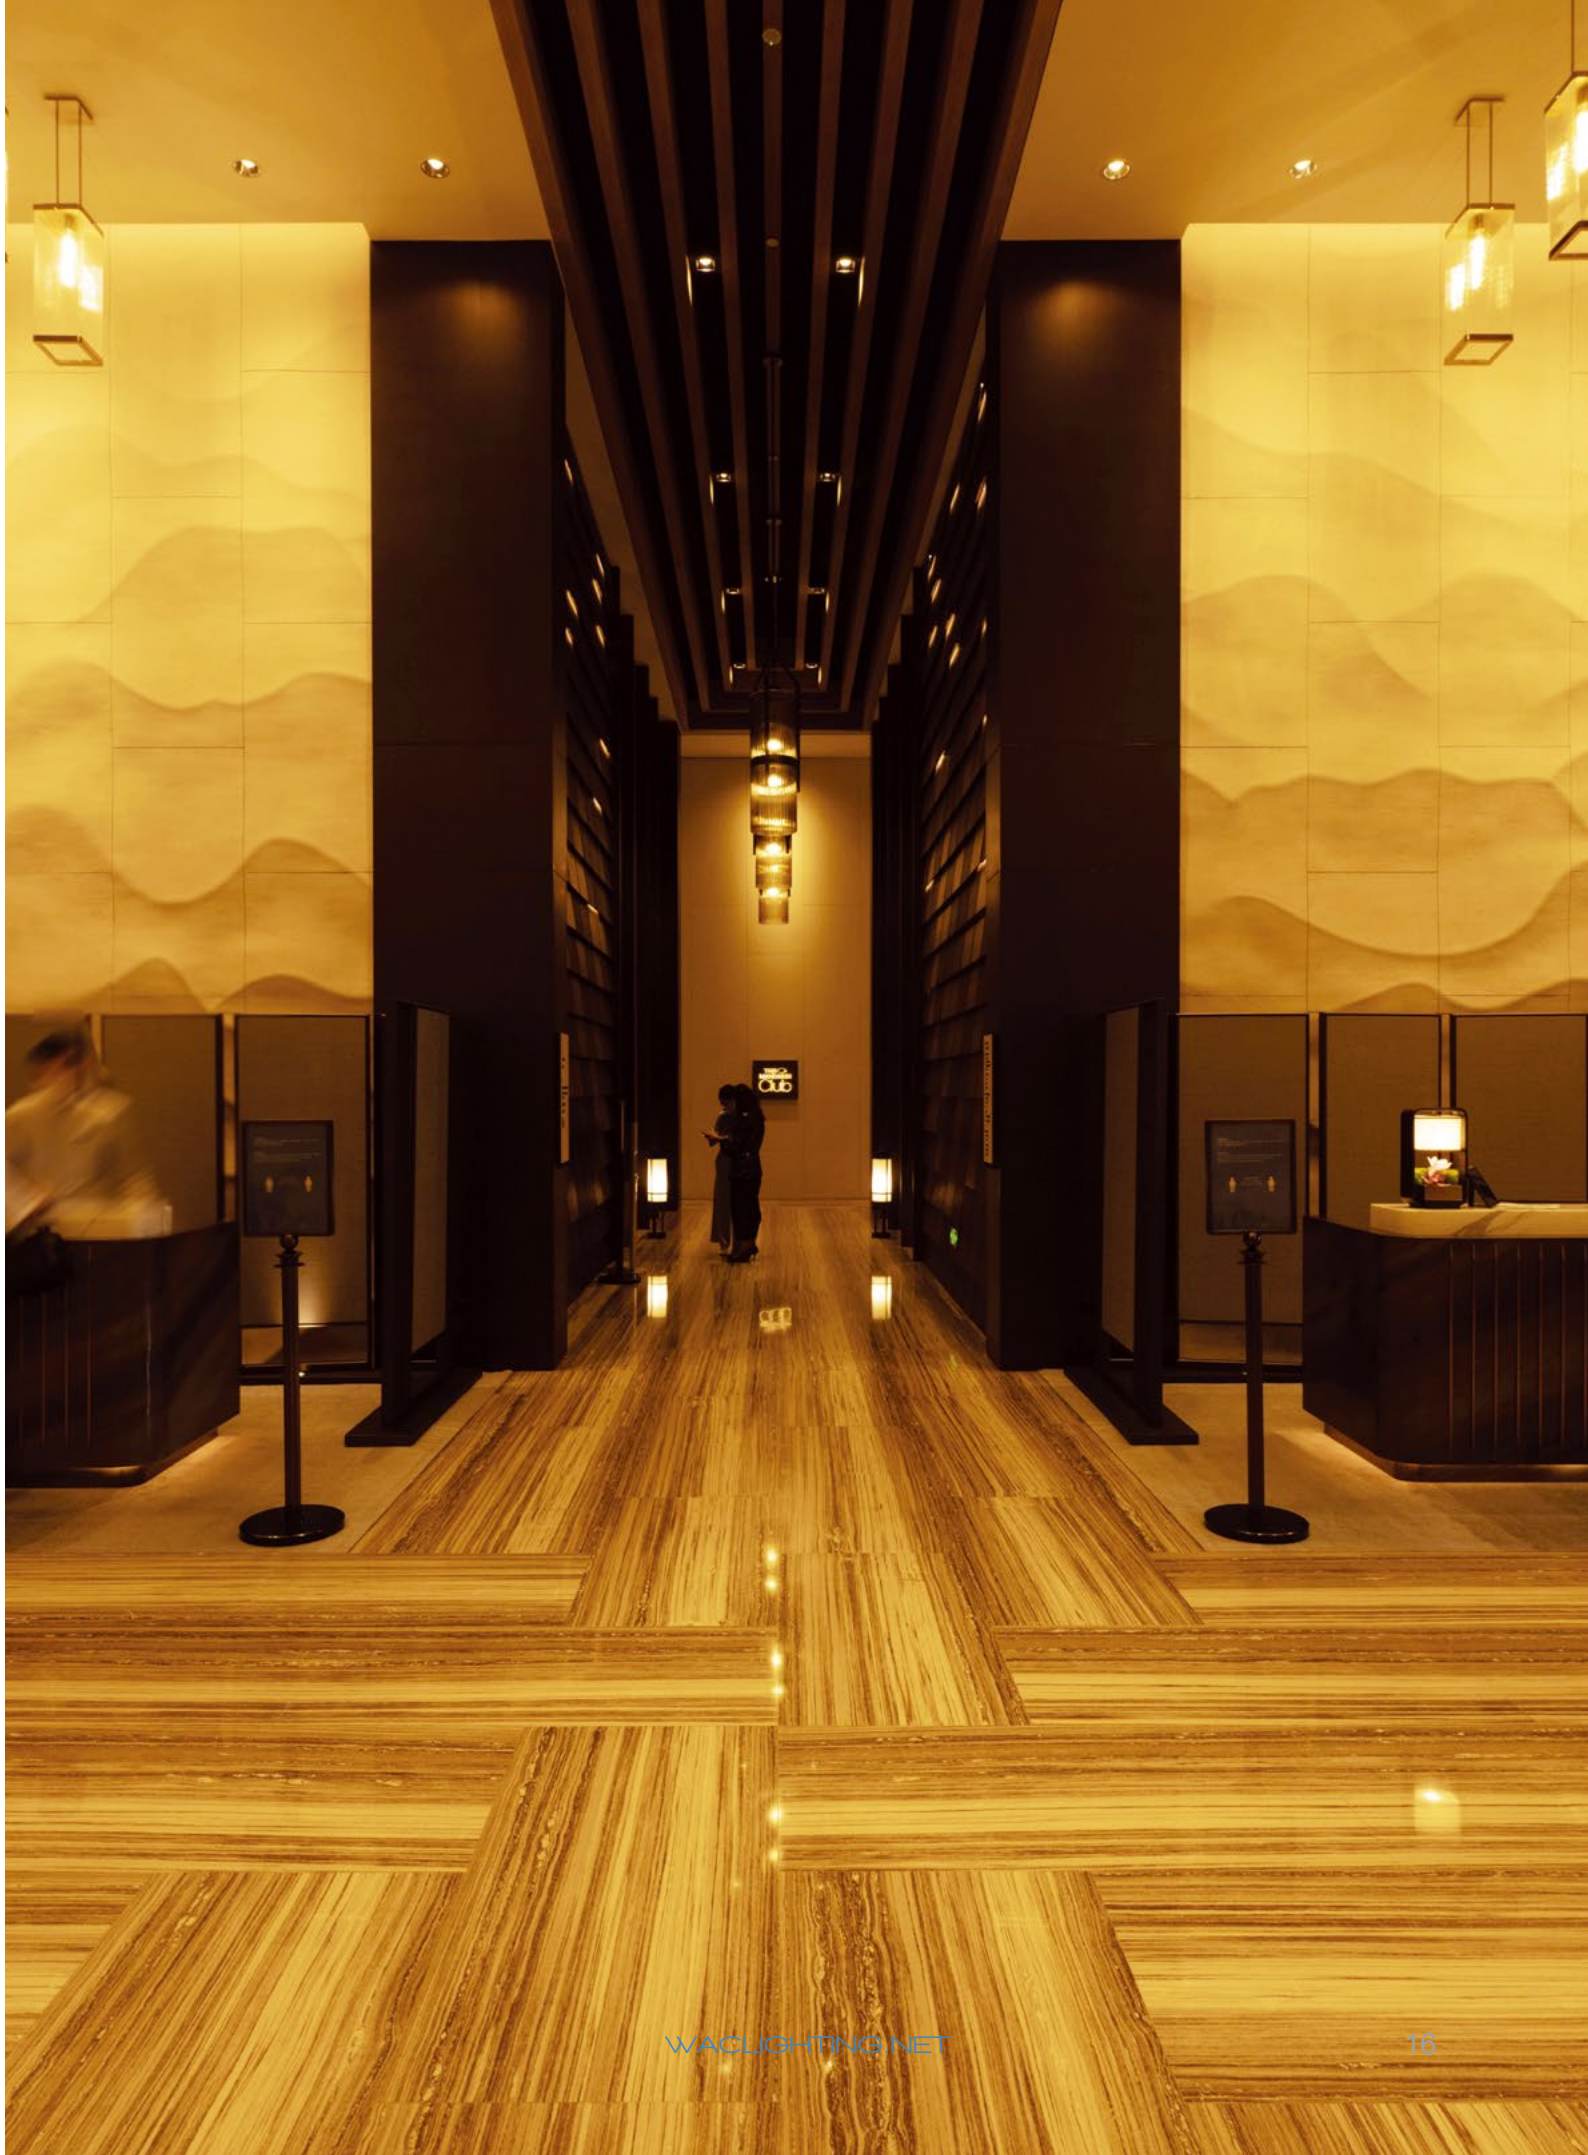





























03

HOSPITALITY
&
LIGHTING




The Modern Hotel Industry in China: An Industry Coming of Age

The modern hotel industry in China has embarked on a magnificent journey of development since the beginning of reform and opening up in 1978, having gone through more than forty years of splendor so far. Throughout the long years, it has shown amazing resilience and vitality, growing in the midst of fierce market competition. This period of history is not only a brilliant chapter of China's modern hotel industry, but also a vivid microcosm of the great achievements of China's reform and opening up.


Period of Initial Development: 1978 - 1987

In the early days of reform and opening up, a large number of Chinese-foreign joint venture and cooperative hotels were built to hospitalize foreign guests.

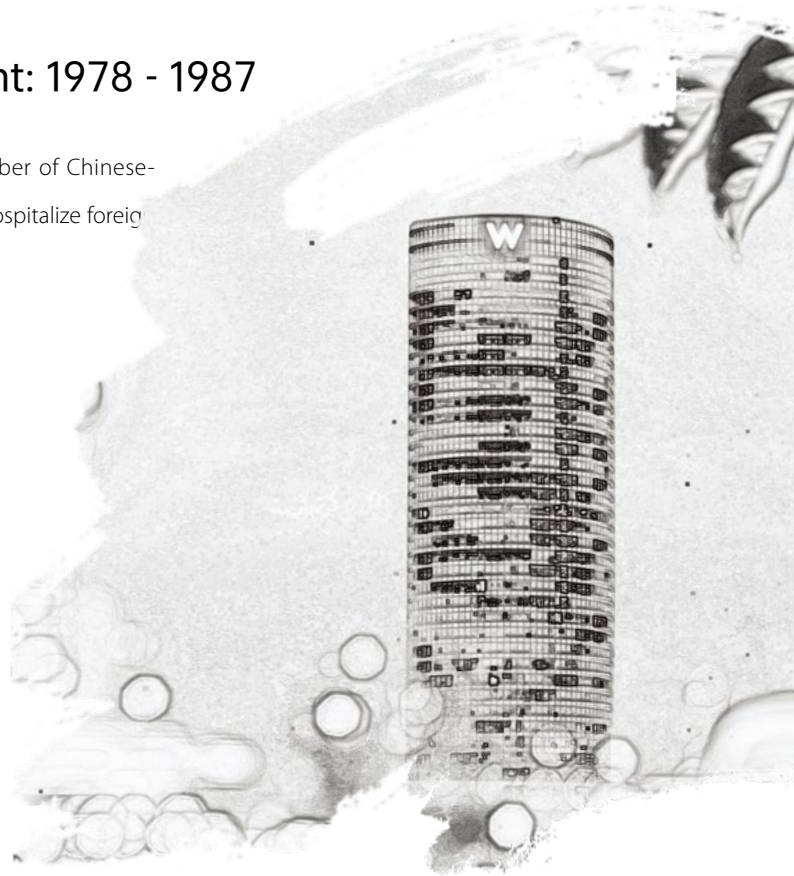

Period of Rapid Growth: 1988 - 2000

At this stage, the country's own hotel management companies were vigorously developed by approving the star rating standards for tourism-related foreign hotels. With the upgrading of service standards, tourism hotels became the earliest industry in line with international standards, making the Star Rating Standard a milestone.

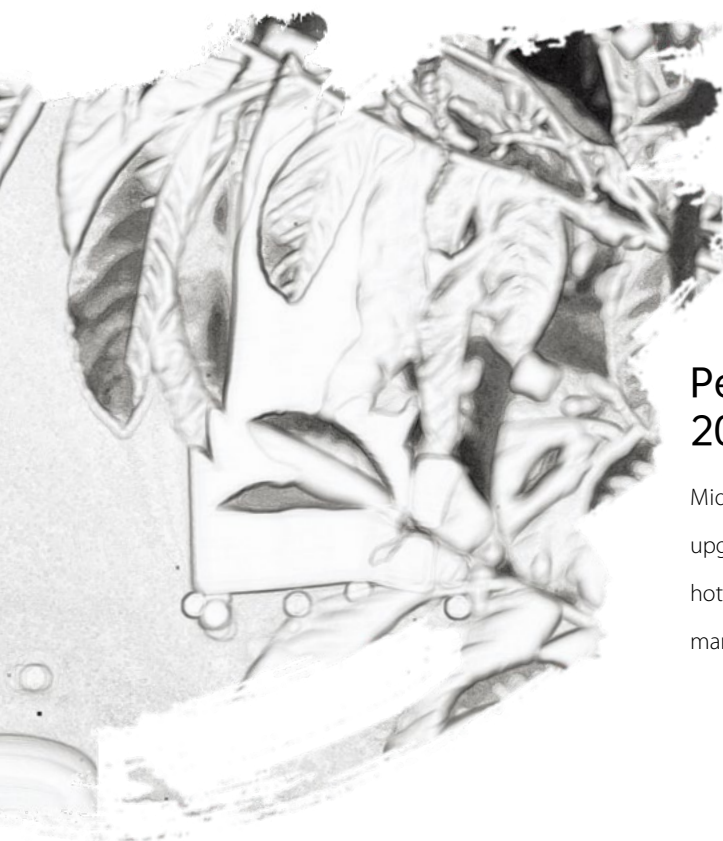

Period of Chain Expansion: 2001 -2015

Rapidly growing demand for hotels has given rise to budget-branded hotel chains with massive expansion.

Period of Integration and Optimization: 2016 - 2022

Mid-range hotels emerge as the main launching point under consumption upgrading. Acquisition, merger and reorganization came to be the norm in the hotel industry. This stage achieved extraordinary development and increased market concentration.

Period of Market Competitive Reshaping: 2023 - Present

The investment and consumption logic changed after the epidemic, with high-quality development and deep regional cultivation accelerating. On the basis of the original star-rated hotels and economy hotels, new business forms are emerging. The rich product matrix , product portfolio diversification and characterization lead to the presentation of hotels not only as accommodation but as commercial and travel space scenarios.

Diversified Competition Among Hotel Industry

The range of brand kinds in today's dynamic hospitality business is being driven by a growing wave of varied competition. This trend has given the hotel business a boost and given customers the ultimate possible multi-option experience. Hotel brands are no longer restricted to the conventional single model due to the intensified competition from a diversified market. Instead, they must look for innovation and investigate how to differentiate their development route.

Numerous hotel brands have arisen to cater to the diverse needs of various consumer segments, including those seeking high-end luxury, business convenience, family-friendly accommodations, or leisure and holiday destinations. Both foreign hotel chains with extensive expertise and domestic hotel chains with strong ties to the local community are diligently building their brand matrices and attempting to showcase their unique characteristics and charms.

International hotel groups, with their global vision and rich operational expertise, are capable of creating brands with worldwide influence. These brands achieve international standards not only in terms of facilities and service quality, but also in terms of brand culture and management concepts, which reflects their unique advantages. To better integrate into the local market, multinational hotel groups emphasize on localization strategy, adjusting their brand strategy and service mode according to market demand and cultural characteristics of different regions.

Relying on the deep comprehension of the local market and rich accumulation of resources, domestic hotel groups have created a series of hotel brands featuring Chinese characteristics. These brands represent Chinese features in their business methods and service approaches, while incorporating Chinese culture's basic values into their design style.

Every hotel brand in this brand matrix has an individual style and set of traits. Some prioritize opulent luxury experiences, others seek out unique and stylish travel, yet others concentrate on business travel requirements, while still others are devoted to leisure travel with the family. By utilizing distinct positioning and service approaches, these brands serve to a variety of consumer demands while advancing the growth and well-being of the hotel industry in its entirety.

WAC Lighting Solution Illuminates Global Top Luxurious Hotels with Professional Strength

As one of the leading companies in the hospitality lighting field, WAC marks its success in the high-end, deluxe and premium brands of numerous global renowned hotel groups. These remarkable achievements constitute a strong proof of WAC's expertise, which profoundly demonstrates the brand's unique style and precise orientation.

 THE RITZ-CARLTON Shenzhen, Guangdong	 ST REGIS Tianjin, China	W HOTELS Shanghai, China	 JW MARRIOTT Shanghai, China	 MARRIOTT Wenzhou, Zhejiang	WESTIN Chongqing, China
 MANDARIN ORIENTAL THE HOTEL GROUP Shenzhen, Guangdong	 Shanghai, China	 WALDORF ASTORIA Xiamen, Fujian	CONRAD Shenzhen, Guangdong	 INTERCONTINENTAL HOTELS & RESORTS 洲际酒店及度假村 Shenzhen, Guangdong	HOTEL INDIGO 英迪格酒店 Suzhou, Jiangsu
REGENT Chongqing, China	 PARK HYATT* Hangzhou, Zhejiang	pullman Shanghai, China	 君澜大饭店 Grand Hotel NARADA Hangzhou, Zhejiang	Le MERIDIEN Zhengzhou, Henan	TRIBUTE PORTFOLIO Shenzhen, Guangdong

WAC's unparalleled quality of service and innovative perspectives have given the global high-end hotel brand an even brighter luster.

Comfort Ambience Function Intelligence

Lighting in the hotel space is a technical means of presenting an artistic expression. With its unique glamor and aesthetics, the lighting brings the ultimate comfort experience to the guests and remains an indispensable part of the hospitality experience.



Comfort

The comfort of a hotel environment impacts directly by the design of its hospitality lighting. Proper lighting may guarantee that the area is well-lit, lessen eye strain, and induce a comfortable and calm atmosphere for visitors.

Simultaneously, the lighting design ought to consider the physiological and psychological requirements of individuals, including steering clear of intense light and imposing shadows, while maintaining a soft and even illumination. Additionally, one may further improve customer satisfaction by setting the optimum lighting brightness and color temperature based on the functional requirements of various spaces, such as restaurants, meeting rooms, and guest rooms.



Ambience

An important factor in establishing a hotel's atmosphere is the lighting. Different moods are produced to suit the requirements of various events through thoughtfully planned lighting programs. For example, gentle, comfortable lighting in guest rooms promotes a peaceful, soothing environment. With romantic lighting in the dining room, you may create a cozy and enjoyable dining environment. A conference room with bright, focused lighting helps foster a productive and focused work environment. Furthermore, to create a distinctive hotel environment, lighting design can be paired with other components like textures and colors.

Function

Well designed lighting improves the efficiency of space utilization. For example, setting sufficient lighting in public areas such as corridor stairs to ensure the safety of guests; setting multi-level lighting in guest rooms allows to fulfill different needs of guests such as reading and resting. Lighting design might strongly connected with the brand image of the hotel. Through a unique lighting style and atmosphere creation, the hotel's features and specialties are shown to attract more guests for experience.




Intelligence

The intelligent lighting system represents a major development trend in hotel lighting. Combined with the intelligent control system, the entire lighting system shall achieve remarkable advantages in terms of scene function adaptability and environmental human adaptability. The brightness, color temperature, light distribution and direction of the luminaires provide global control and coordination in the system to achieve illuminating effects which are hard to be realized in the traditional mode. From the perspective of scene function, intelligent lighting enables rapid and convenient switching of different lighting modes in accordance with the requirements of site operations. In terms of environmental human adaptability, intelligent lighting offers the most suitable optical color and illuminance at various stages of time as per the human body's natural physiological rhythms.



04

LIGHTING TECHNOLOGY

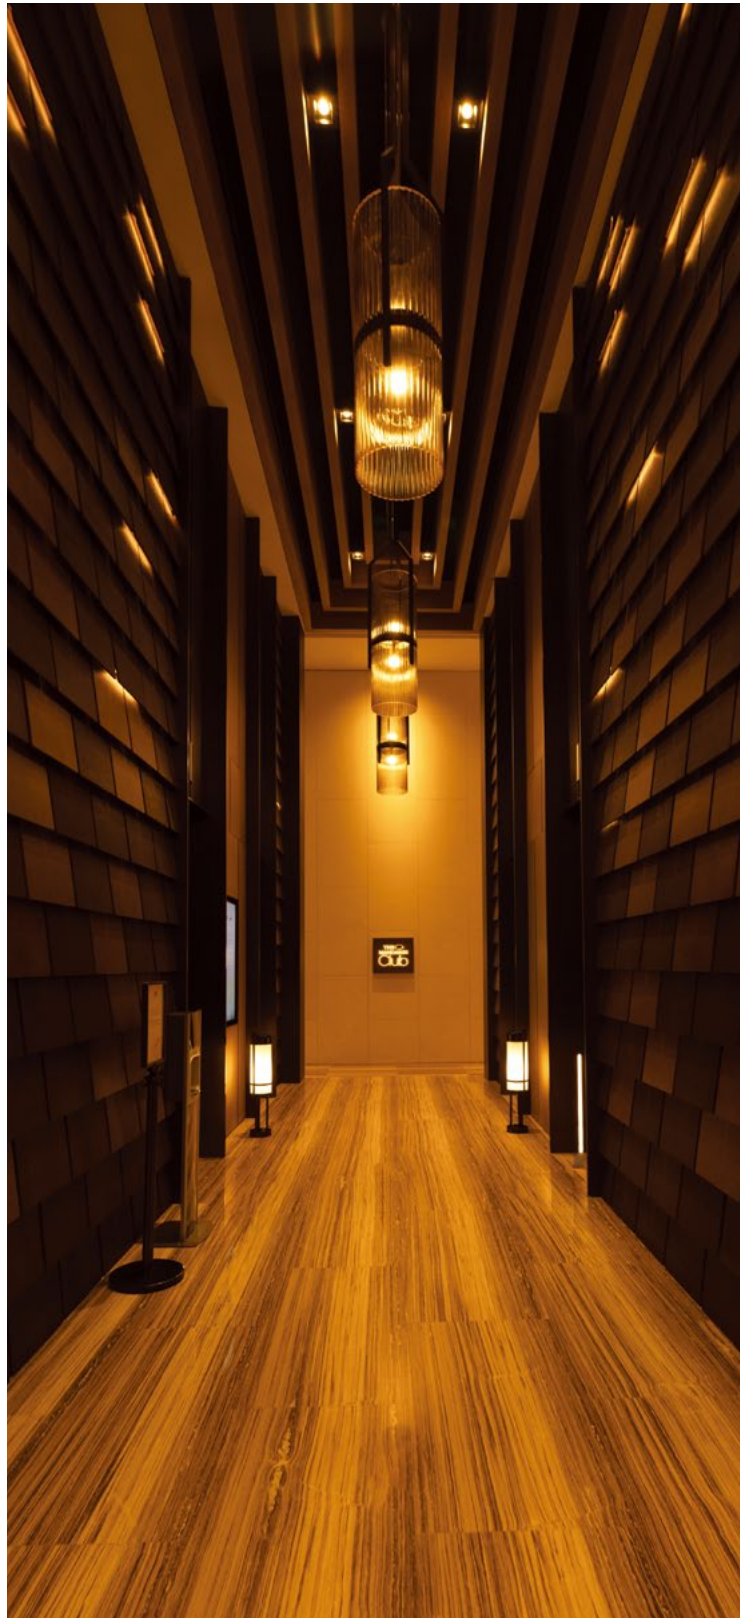

Patent -SUBROSA® Invisible Light Technology

Patent No.:ZL 201710792586.3

The unique SUBROSA® technology controls the reflected light perfectly within the cut-off angle, which guarantees that the surface of the reflector will not cause high brightness reflection to the human eye, providing a soft illumination and achieving the ultimate anti-glare effect.




Regent Hotel Chongqing
Chongqing, China



LiteBrush® Light Falls Wall Washing Technology

Utility Model Patent No.: 201721002833.7

J Hotel Shanghai Center
Shanghai, China

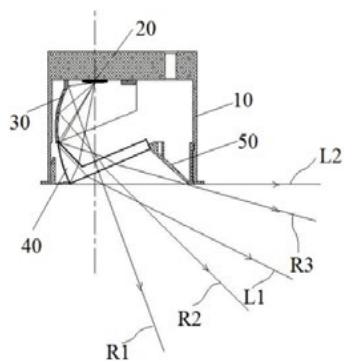

PLANA PRO Optical Path Design

The patented optical design of the recessed wall wash fixtures is ingenious, able to fill in corners and other dark places, while ensuring that the light is accurately distributed to present an outstanding optical effect



The lighting effects appear as subtle and magical, infusing the space with unparalleled charm and vitality, creating a cozy and pleasant atmosphere.

Down-light Angle Integration Technology

Patent No.: 202020290233.0

WAC's unique Down-light Angle Adjustment Technology, with its revolutionary and innovative design, is beyond the traditional angle adjustment structures on the market. The technology utilizes a precision sealed construction to ensure seamless light control throughout every step of the angling process.



Mandarin Oriental, Shenzhen
Guangdong, China



ULTRA Series


A luminaire features powerful downlighting function and flexible adjustment performance, bringing unprecedented experience for hotel lighting.



The unique visual adjustment greatly facilitates the installation and commissioning process on site.

Smart Control System

The intelligent control system of WAC incorporates various advanced control techniques into its integrated architecture. This technique is particularly useful for events with elaborate lighting setups and high ceilings. The WAC intelligent control system is simple to operate in multipurpose rooms while delivers appropriate lighting and shadow effects for each occasion, including dramatic presentations, solemn meetings, and passionate speeches. The WAC Intelligent Control System precisely controls the ambiance in hotel banquet halls that have hosted innumerable romantic weddings and joyous occasions, ensuring that every banquet is a memorable occasion.

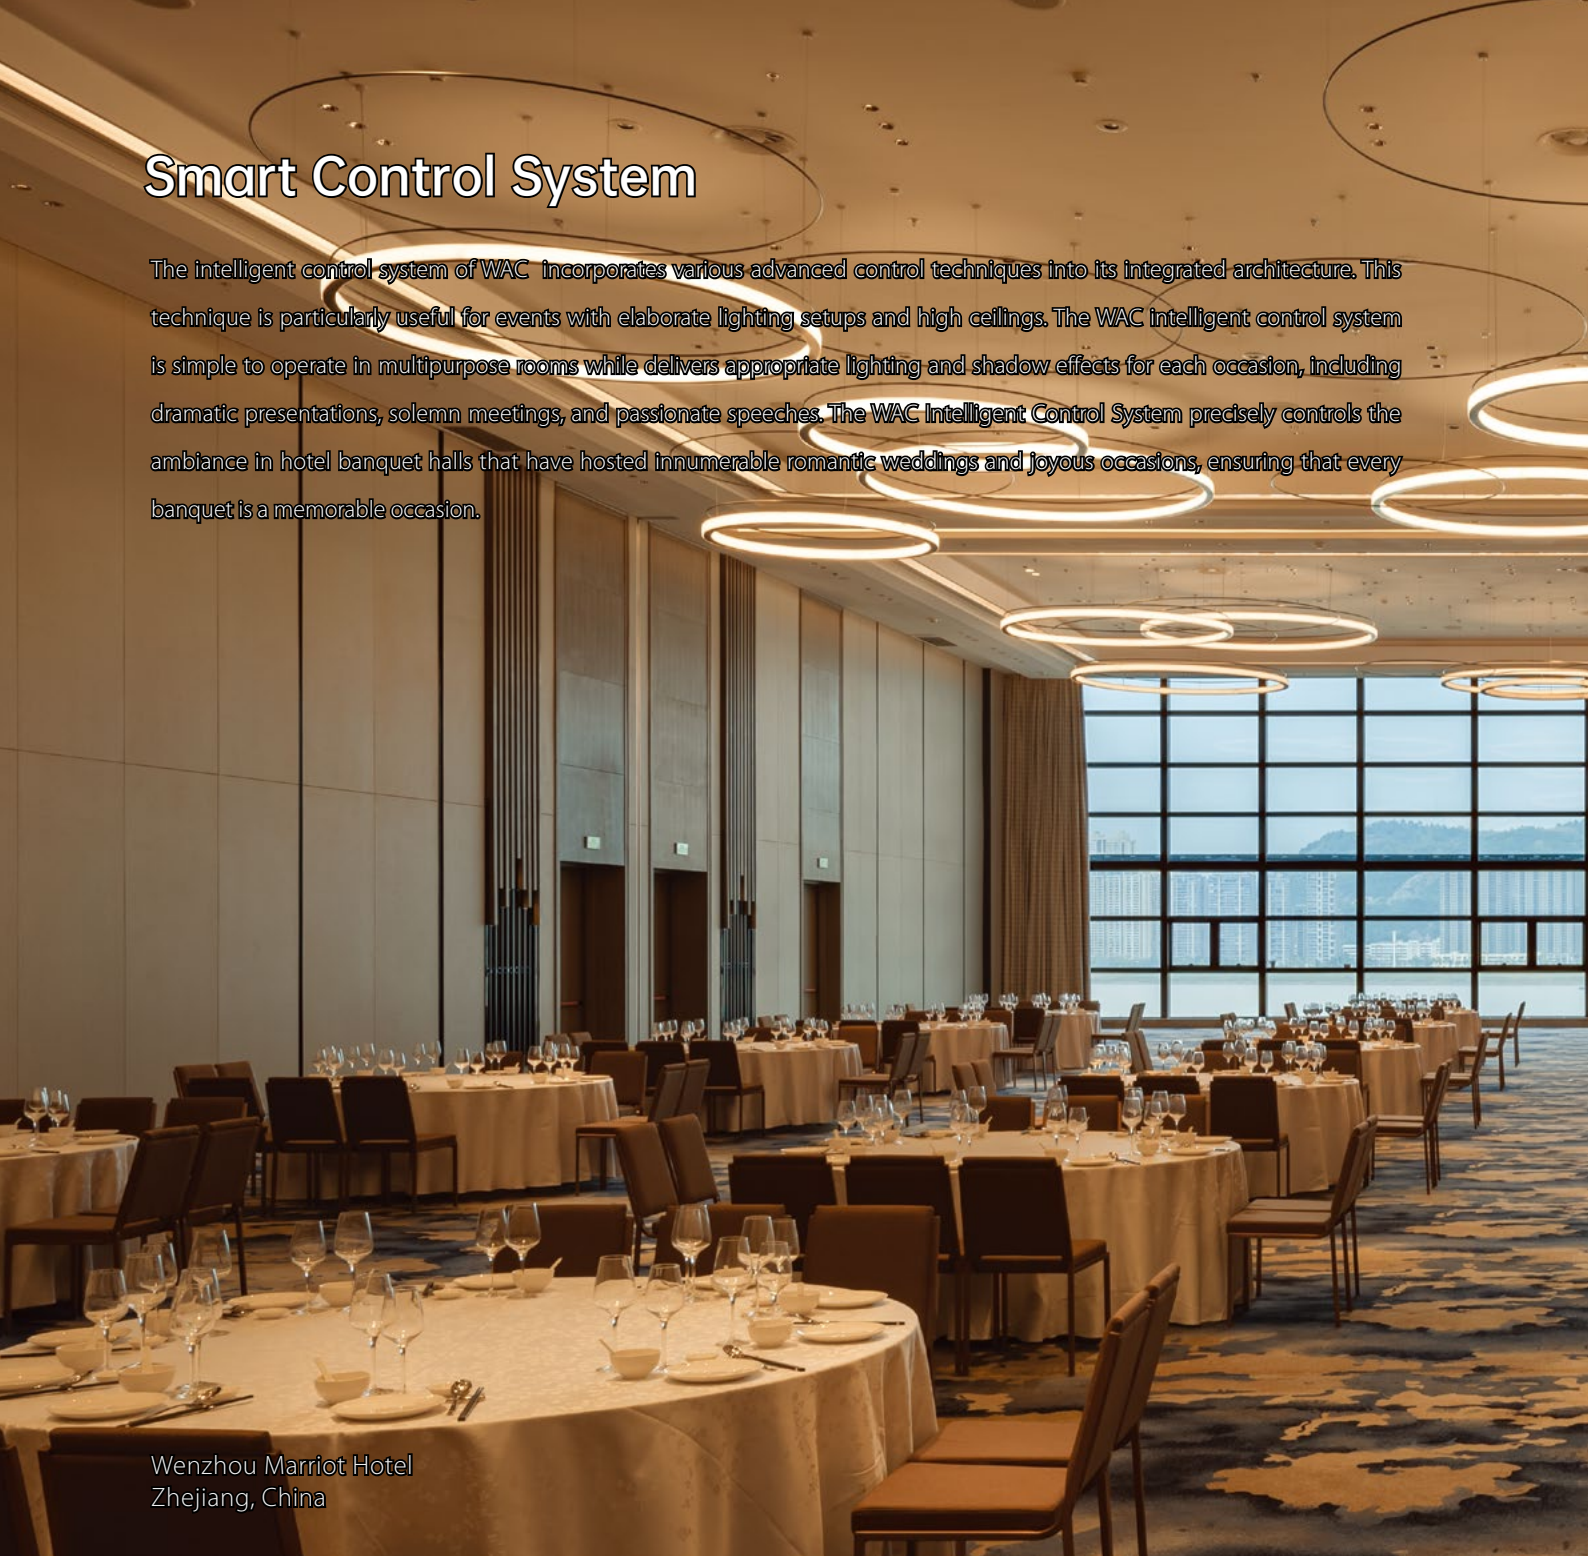


Wenzhou Marriot Hotel
Zhejiang, China



VOLTA SMART Series

Remote adjustable to control the projection direction of the luminaries Horizontal 0-355°, Vertical $\pm 30^\circ$ adjustable



APP



Remote Controller



Dimmable



DMX

Multiple Control Methods:

APP control, remote control, remote control +0-10V, remote control

+DMX512 according to different scenes and requirements with different intelligent control systems.

05

PRODUCTS INTRODUCTION



RECESSED CEILING LUMINAIRES

51



LINEAR LUMINAIRES

125

RECESSED CEILING LUMINAIRES



VOLTA

VOLTA ROUND DOWNLIGHT - DIRECTIONAL
VOLTA ROUND DOWNLIGHT
VOLTA ROUND DIRECTIONAL
VOLTA ROUND WALL WASHER
VOLTA SQUARE DOWNLIGHT - DIRECTIONAL
VOLTA SQUARE DOWNLIGHT
VOLTA SQUARE DIRECTIONAL
VOLTA SMART

54

55
59
65
71
73
77
83
89



ULTRA


ULTRA ROUND TRIM
ULTRA ROUND TRIMLESS
ULTRA SQUARE TRIM
ULTRA SQUARE TRIMLESS
ULTRA MULTIPLES SQUARE TRIM
ULTRA MULTIPLES SQUARE TRIMLESS
ULTRA MICRO AND ANTI-FOG

92

93
97
101
105
109
113
117



J Hotel Shanghai Tower
Shanghai

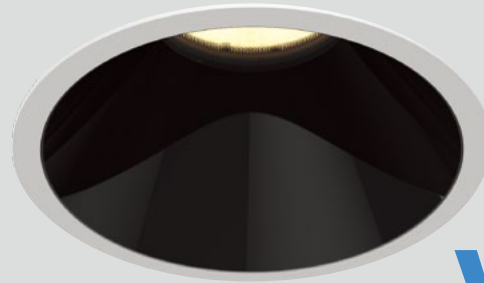

VOLTA



High Thermal Performance
Convective heat dissipation + Enclosed
Chimney Heat Dissipation Dual Design

IP44 Sealed Light Chamber Design
Ensures stable performance in humid
environments.



VOLTA ROUND DOWNLIGHT - DIRECTIONAL



ADLT01



ADDT11




ADDT11

Specifications



- Body Material: Aluminum
- Optical System: Clear Lens included+Honeycomb
- Finish: Environmentally safe powder coat
- Adjustable Angle:
 - ADDT11-LD02: 0°-360° horizontal rotation and -20°-20° vertical aiming tilt
 - ADDT11-LD05: 0°-25° vertical aiming tilt
- Wiring: Please refer to wiring schematic diagram at the end of catalog
- Cutout: Ø18mm / Ø36mm / Ø36mm
- Ceiling Thickness: 1mm-15mm
- Cut Off Angle:15°
- LED Type: High Power LED
- LED Wattage, CCT, Lumen Output:
 - ADLT01 3000K: 100lm
 - ADDT11 3000K: 175lm 2W / 500lm 5W
- LED Lifetime: >50,000h-L70 / B10-Ta25°C (LM-80/TM-21)
- LED Color Consistency: 3 SDCM
- Net Weight: 0.01Kg / 0.1Kg / 0.1Kg

Product Features/Optics



1 12°/15°/17°


2 24°

3 36°

5 50°/55°

6 60°

Product Parameters




Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADLT	0 0.5"	1 Round Trim	LD01 LED 1W	41lm(@1W 3000K 17°) 37lm(@1W 3000K 24°) 27lm(@1W 3000K 36°) 63lm(@1W 3000K 60°)	T DMX512 Dimming 24V DC Power Supply M MTB driver N No Driver	1 17°	27 2700K	W White	WT White
						2 24°	30 3000K		
						3 36°	35 3500K	B Black	BK Black
						6 60°	40 4000K		

Example : ADLT01-LD01N230WWT


Note: Except for 60°, all other Honeycomb standard configured.

"MTB" needs to be ordered separately and cannot be directly connected to the mains power supply



Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADDT	1 1"	1 Round Trim	LD02 LED 2W	91lm(@2W 3000K 13°) 95lm(@2W 3000K 24°) 89lm(@2W 3000K 36°) 74lm(@2W 3000K 55°)	E ON-OFF N No Driver	1 12°	27 2700K	W White	WT White
						2 24°	30 3000K		
						3 36°	35 3500K	B Black	BK Black
						5 55°	40 4000K		


Example : ADDT11-LD02E230WWT



Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADDT	1 1"	1 Round Trim	LD05 LED 5W	274lm(@5W 3000K 15°) 235lm(@5W 3000K 24°) 218lm(@5W 3000K 36°) 184lm(@5W 3000K 50°)	E ON-OFF D 0-10V Dimming A DALI N No Driver	1 15°	27 2700K	W White	WT White
						2 24°	30 3000K		
						3 36°	35 3500K	B Black	BK Black
						5 50°	40 4000K 50 5000K		

Example : ADDT11-LD05E230WWT


ADLT01



ADLT01-LD01T130WWT

0° Aiming Angle


D(M)	LUX	W	L
1	271	0.33	0.33
2	68	0.66	0.66
3	30	0.99	0.99
4	17	1.32	1.32



ADLT01-LD01T230WWT

0° Aiming Angle


D(M)	LUX	W	L
1	178	0.43	0.43
2	45	0.86	0.86
3	20	1.29	1.29
4	11	1.72	1.72



ADLT01-LD01T330WWT

0° Aiming Angle

D(M)	LUX	W	L
1	53	0.69	0.69
2	13	1.38	1.38
3	6	2.07	2.07
4	3	2.76	2.76




ADLT01-LD01T630WWT

0° Aiming Angle

D(M)	LUX	W	L
1	55	1.20	1.20
2	14	2.40	2.40
3	6	3.60	3.60
4	3	4.80	4.80


ADDT11-LD02



ADDT11-LD02E130WWT

0° Aiming Angle


D(M)	LUX	W	L
1	1122	0.23	0.23
2	281	0.46	0.46
3	125	0.69	0.69
4	70	0.92	0.92



ADDT11-LD02E230WWT

0° Aiming Angle


D(M)	LUX	W	L
1	390	0.45	0.45
2	98	0.90	0.90
3	43	1.35	1.35
4	24	1.80	1.80



ADDT11-LD02E330WWT

0° Aiming Angle

D(M)	LUX	W	L
1	211	0.61	0.61
2	53	1.22	1.22
3	23	1.83	1.83
4	13	2.44	2.44




ADDT11-LD02E530WWT

0° Aiming Angle

D(M)	LUX	W	L
1	88	1.00	1.00
2	22	2.00	2.00
3	10	3.00	3.00
4	6	4.00	4.00


ADDT11-LD05



ADDT11-LD05E130WWT

0° Aiming Angle


D(M)	LUX	W	L
1	2185	0.30	0.30
2	546	0.60	0.60
3	243	0.90	0.90
4	137	1.20	1.20



ADDT11-LD05E230WWT

0° Aiming Angle


D(M)	LUX	W	L
1	914	0.45	0.45
2	229	0.90	0.90
3	102	1.35	1.35
4	57	1.80	1.80



ADDT11-LD05E330WWT

0° Aiming Angle

D(M)	LUX	W	L
1	477	0.63	0.63
2	119	1.26	1.26
3	53	1.89	1.89
4	30	2.52	2.52



ADDT11-LD05E530WWT

0° Aiming Angle

D(M)	LUX	W	L
1	281	0.82	0.82
2	70	1.64	1.64
3	31	2.46	2.46
4	18	3.28	3.28



J Hotel Shanghai Tower
Shanghai

VOLTA ROUND DOWNLIGHT



ADLT21

ADLT31

ADLT41

ADLT51

ADLT61


Specifications



- Body Material: Aluminum
- Optical System: Clear Lens included+Reflector
- Finish: Environmentally safe powder coat
- Accessories/Brackets: Various Optical Accessories
- Wiring: Please refer to wiring schematic diagram at the end of catalog

- Cutout: Ø55mm / Ø75mm / Ø100mm / Ø125mm / Ø150mm
- Ceiling Thickness: 1mm-20mm / 1mm-25mm / 1mm-30mm
- Cut Off Angle: 30°
- LED Wattage, CCT, Lumen Output:
 - ADLT21 3000K: 720lm 8W
 - ADLT31 3000K: 720lm 8W / 800lm 7W / 1150lm 10W / 1495lm 13W
 - ADLT41 3000K: 720lm 8W / 1465lm 13W / 1975lm 18W
 - ADLT51 3000K: 1975lm 18W / 2160lm 24W / 2610lm 25W / 3255lm 32W
 - ADLT61 3000K: 3000lm 32W / 3830lm 32W / 4505lm 43W
- LED Lifetime: >50,000h-L70 / B10-Ta25°C (LM-80/TM-21)
- LED Color Consistency: 3 SDCM
- Net Weight: 0.2Kg /0.35Kg /0.6Kg / 1.0Kg / 1.7Kg

Product Features/Optics

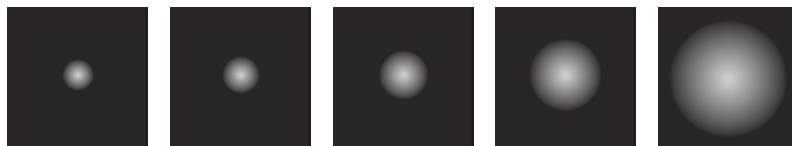

5 8°


1 15°/18°

2 24°/28°

3 36°/38°


5 50°

Product Parameters




Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish	
ADLT	2	2"	1 Round Trim (IP44 Aperture)	LD08 LED 8W	397lm(@8W 3000K 15°) 455lm(@8W 3000K 24°) 445lm(@8W 3000K 36°) 302lm(@8W 3000K 50°)	E ON-OFF D 0-10V Dimming A DALI N No Driver	1 15°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
							2 24°			
							3 36°			
							5 50°			
ADLT	2	2"	1 Round Trim (IP44 Aperture)	LD07 LED 7W	395lm(@7W 3000K 24°) 380lm(@7W 3000K 36°) 348lm(@7W 3000K 50°)	A DALI N No Driver	2 24°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black
							3 36°			
							5 50°			

Example : ADLT21-LD08E-230SWT



Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish	
ADLT	3	3"	1 Round Trim (IP44 Aperture)	LD08 LED 8W	375lm(@8W 3000K 8°)	E ON-OFF D 0-10V Dimming	S 8°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLT	3	3"	1 Round Trim (IP44 Aperture)	LM07 COB 7W LM10 COB 10W LM13 COB 13W	438lm(@7W 3000K 15°) 554lm(@7W 3000K 24°) 456lm(@7W 3000K 36°) 378lm(@7W 3000K 50°) 542lm(@10W 3000K 15°) 685lm(@10W 3000K 24°)	E ON-OFF D 0-10V Dimming	1 15° 2 24° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLT	3	3"	1 Round Trim (IP44 Aperture)	LM13 COB 13W	935lm(@10W 3000K 15°) 467lm(@10W 3000K 50°) 710lm(@13W 3000K 15°) 896lm(@13W 3000K 24°) 738lm(@13W 3000K 36°) 612lm(@13W 3000K 50°)	N No Driver A DALI	1 15° 2 24° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLT	3	3"	1 Round Trim (IP44 Aperture)	LM13 COB 13W	935lm(@13W 3000K 18°) 1035lm(@13W 3000K 28°) 1024lm(@13W 3000K 36°) 677lm(@13W 3000K 50°)	N No Driver A DALI	1 18° 2 28° 3 38° 5 50°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black


Example : ADLT31-LM13E-230SWT



Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish	
ADLT	4	4"	1 Round Trim (IP44 Aperture)	LD08 LED 8W	375lm(@8W 3000K 8°)	E ON-OFF D 0-10V Dimming	S 8°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLT	4	4"	1 Round Trim (IP44 Aperture)	LM13 COB 13W LM18 COB 18W	884lm(@13W 3000K 15°) 1128lm(@13W 3000K 24°) 1204lm(@13W 3000K 36°) 995lm(@13W 3000K 50°) 1258lm(@18W 3000K 15°) 1604lm(@18W 3000K 24°)	E ON-OFF D 0-10V Dimming	1 15°	27 2700K	B Black S Specular	WT White BK Black
							2 24°	30 3000K		
							3 36°	35 3500K		
							40 4000K			
							5 50°	50 5000K		
ADLT	4	4"	1 Round Trim (IP44 Aperture)	LM18 COB 18W	1712lm(@18W 3000K 36°) 1414lm(@18W 3000K 50°)	N No Driver A DALI	1 15°	27 2700K	B Black S Specular	WT White BK Black
							2 24°	30 3000K		
							3 36°	35 3500K		
							40 4000K			
							5 50°	50 5000K		
ADLT	4	4"	1 Round Trim (IP44 Aperture)	LM18 COB 18W	1349lm(@18W 3000K 18°) 1384lm(@18W 3000K 28°) 1421lm(@18W 3000K 38°) 1184lm(@18W 3000K 50°)	N No Driver A DALI	1 18°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black
							2 28°			
							3 38°			
							5 50°			


Example : ADLT41-LM13E-230SWT

Product Parameters



Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish	
ADLT	5	5"	1 Round Trim (IP44 Aperture)	LD24 LED 24W	1125lm(@24W 3000K 8°)	E ON-OFF D 0-10V Dimming	S 8°	27 2700K	B Black S Specular	WT White
								30 3000K		BK Black
								35 3500K		
								40 4000K		
								50 5000K		
ADLT	5	5"	1 Round Trim (IP44 Aperture)	LM18 COB 18W LM25 COB 25W LM32 COB 32W	1609lm(@18W 3000K 15°) 1640lm(@18W 3000K 24°) 1783lm(@18W 3000K 36°) 1538lm(@18W 3000K 50°) 2111lm(@25W 3000K 15°) 2152lm(@25W 3000K 24°)	E ON-OFF D 0-10V Dimming	1 15° 2 24° 3 36° 5 50°	27 2700K	B Black S Specular	WT White
								30 3000K		BK Black
								35 3500K		
								40 4000K		
								50 5000K		
ADLT	5	5"	1 Round Trim (IP44 Aperture)	LM32 COB 32W	2340lm(@25W 3000K 36°) 2018lm(@25W 3000K 50°) 2630lm(@32W 3000K 15°) 2682lm(@32W 3000K 24°) 2916lm(@32W 3000K 36°) 2514lm(@32W 3000K 50°)	N No Driver A DALI	1 15° 2 24° 3 36° 5 50°	27 2700K	B Black S Specular	WT White
								30 3000K		BK Black
								35 3500K		
								40 4000K		
								50 5000K		
ADLT	5	5"	1 Round Trim (IP44 Aperture)	LM25 COB 25W	2094lm(@25W 3000K 18°) 1967lm(@25W 3000K 28°) 2142lm(@25W 3000K 38°) 1830lm(@25W 3000K 50°)	N No Driver A DALI	1 18° 2 28° 3 38° 5 50°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White
										BK Black


Example : ADLT51-LM18E-230SWT



Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish	
ADLT	6	6"	1 Round Trim (IP44 Aperture)	LD32 LED 32W	1500lm(@32W 3000K 8°)	E ON-OFF D 0-10V Dimming	S 8°	27 2700K	B Black S Specular	WT White BK Black
								30 3000K		
								35 3500K		
								40 4000K		
								50 5000K		
ADLT	6	6"	1 Round Trim (IP44 Aperture)	LM32 COB 32W LM43 COB 43W	2393lm(@32W 3000K 15°) 3015lm(@32W 3000K 24°) 3001lm(@32W 3000K 36°) 2830lm(@32W 3000K 50°) 3108lm(@43W 3000K 15°) 3916lm(@43W 3000K 24°)	E ON-OFF D 0-10V Dimming	1 15°	27 2700K	B Black S Specular	WT White BK Black
							2 24°	30 3000K		
							3 36°	35 3500K		
							40 4000K			
							50 5000K			
ADLT	6	6"	1 Round Trim (IP44 Aperture)	LM43 COB 43W	3897lm(@43W 3000K 36°) 3675lm(@43W 3000K 50°)	N No Driver A DALI	1 15°	27 2700K	B Black S Specular	WT White BK Black
							2 24°	30 3000K		
							3 36°	35 3500K		
							40 4000K			
							50 5000K			
ADLT	6	6"	1 Round Trim (IP44 Aperture)	LM43 COB 43W	3254lm(@43W 3000K 18°) 3271lm(@43W 3000K 28°) 3367lm(@43W 3000K 38°) 3249lm(@43W 3000K 50°)	N No Driver A DALI	1 18°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black
							2 28°			
							3 38°			
							3 38°			
							5 50°			

Example : ADLT61-LM32E-230SWT


ADLT21



ADLT21-LD08E130SWT

0° Aiming Angle


D(M)	LUX	W	L
1	2992	0.31	0.31
2	748	0.62	0.62
3	332	0.93	0.93
4	187	1.24	1.24



ADLT21-LD08E230SWT

0° Aiming Angle


D(M)	LUX	W	L
1	1795	0.50	0.50
2	449	1.00	1.00
3	199	1.50	1.50
4	112	2.00	2.00



ADLT21-LD08E330SWT

0° Aiming Angle

D(M)	LUX	W	L
1	1005	0.66	0.66
2	251	1.32	1.32
3	112	1.98	1.98
4	63	2.64	2.64




ADLT21-LD08E530SWT

0° Aiming Angle

D(M)	LUX	W	L
1	426	0.96	0.96
2	107	1.92	1.92
3	47	2.88	2.88
4	27	3.84	3.84


ADLT31



ADLT31-LM10E130SWT

0° Aiming Angle


D(M)	LUX	W	L
1	4604	0.28	0.28
2	1151	0.56	0.56
3	512	0.84	0.84
4	288	1.12	1.12



ADLT31-LM10E230SWT

0° Aiming Angle


D(M)	LUX	W	L
1	2341	0.50	0.50
2	585	1.00	1.00
3	260	1.50	1.50
4	146	2.00	2.00



ADLT31-LM10E330SWT

0° Aiming Angle

D(M)	LUX	W	L
1	1361	0.63	0.63
2	340	1.26	1.26
3	151	1.89	1.89
4	85	2.52	2.52




ADLT31-LM10E530SWT

0° Aiming Angle

D(M)	LUX	W	L
1	698	0.88	0.88
2	175	1.76	1.76
3	78	2.64	2.64
4	44	3.52	3.52


ADLT41



ADLT41-LM18E130SWT

0° Aiming Angle


D(M)	LUX	W	L
1	9597	0.3	0.3
2	2399	0.6	0.6
3	1066	0.9	0.9
4	600	1.2	1.2



ADLT41-LM18E230SWT

0° Aiming Angle


D(M)	LUX	W	L
1	6695	0.5	0.5
2	1674	0.9	0.9
3	744	1.4	1.4
4	418	1.8	1.8



ADLT41-LM18E330SWT

0° Aiming Angle

D(M)	LUX	W	L
1	3529	0.7	0.7
2	882	1.4	1.4
3	392	2.1	2.1
4	221	2.8	2.8




ADLT41-LM18E530SWT

0° Aiming Angle

D(M)	LUX	W	L
1	1890	0.9	0.9
2	473	1.8	1.8
3	210	2.7	2.7
4	118	3.6	3.6


ADLT51



ADLT51-LM25E130SWT

0° Aiming Angle


D(M)	LUX	W	L
1	18431	0.3	0.3
2	4608	0.6	0.6
3	2048	0.9	0.9
4	1152	1.1	1.1



ADLT51-LM25E230SWT

0° Aiming Angle


D(M)	LUX	W	L
1	8847	0.5	0.5
2	2212	0.9	0.9
3	983	1.4	1.4
4	553	1.8	1.8



ADLT51-LM25E330SWT

0° Aiming Angle

D(M)	LUX	W	L
1	4905	0.7	0.7
2	1226	1.4	1.4
3	545	2.1	2.1
4	307	2.8	2.8




ADLT51-LM25E530SWT

0° Aiming Angle

D(M)	LUX	W	L
1	3033	0.9	0.9
2	758	1.7	1.7
3	337	2.6	2.6
4	190	3.4	3.4


ADLT61



ADLT61-LM43E130SWT

0° Aiming Angle


D(M)	LUX	W	L
1	30695	0.3	0.3
2	7674	0.5	0.5
3	3411	0.8	0.8
4	1918	1.1	1.1



ADLT61-LM43E230SWT

0° Aiming Angle


D(M)	LUX	W	L
1	17104	0.5	0.5
2	4276	0.9	0.9
3	1900	1.4	1.4
4	1069	1.8	1.8



ADLT61-LM43E330SWT

0° Aiming Angle

D(M)	LUX	W	L
1	8637	0.7	0.7
2	2159	1.3	1.3
3	960	2.0	2.0
4	540	2.7	2.7



ADLT61-LM43E530SWT

0° Aiming Angle

D(M)	LUX	W	L
1	4885	1.0	1.0
2	1221	1.9	1.9
3	543	2.9	2.9
4	305	3.8	3.8

Accessories

Lenses/Filters

Model	Beam Elongator	Honeycomb
		
ADLT21	ALENS-DLT21-BEL	ALENS-DLT21-HCL
ADLT31	ALENS-DLT31-BEL	ALENS-DLT31-HCL
ADLT41	ALENS-DLT41-BEL	ALENS-DLT41-HCL
ADLT51	ALENS-DLT51-BEL	ALENS-DLT51-HCL
ADLT61	ALENS-DLT61-BEL	ALENS-DLT61-HCL

Note: Only one piece accessory allowed and need to order separately

VOLTA ROUND DIRECTIONAL



ADDT21


ADDT31

ADDT41

ADDT51


ADDT61

Specifications



- Body Material: Aluminum
- Optical System: Clear Lens included+Reflector
- Finish: Environmentally safe powder coat
- Adjustable Angle: 0°-25° vertical aiming tilt
- Accessories/Brackets: Various Optical Accessories
- Wiring: Please refer to wiring schematic diagram at the end of catalog
- Cutout: Ø55mm / Ø75mm / Ø100mm / Ø125mm / Ø150mm
- Ceiling Thickness: 1mm-15mm / 1mm-15mm / 1mm-20mm / 1mm-25mm / 1mm-30mm
- Cut Off Angle: 30°
- LED Type: COB
- LED Wattage, CCT, Lumen Output:
 - ADDT21 3000K: 800lm 7W / 720lm 8W
 - ADDT31 3000K: 800lm 7W / 720lm 8W / 1150lm 10W / 1495lm 13W
 - ADDT41 3000K: 720lm 8W / 1465lm 13W / 1975lm 18W
 - ADDT51 3000K: 1975lm 18W / 2160lm 24W / 2610lm 25W / 3255lm 32W
 - ADDT61 3000K: 3000lm 32W / 3830lm 32W / 4505lm 43W
- LED Lifetime: >50,000h-L70 / B10-Ta25°C (LM-80/TM-21)
- LED Color Consistency: 3 SDCM
- Net Weight: 0.2Kg / 0.35Kg / 0.6Kg / 1.0Kg / 1.7Kg

Product Features/Optics

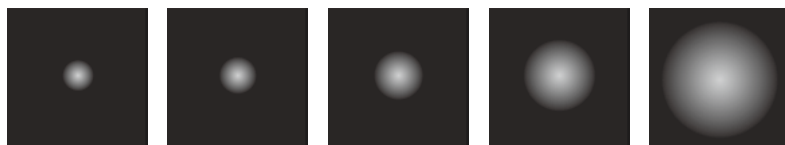

S 8°


1 15°/18°

2 24°/28°

3 36°/38°


5 50°

Product Parameters




Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADDT	2 2"	1 Round Trim (IP44 Aperture)	LD08 LED 8W	397lm(@8W 3000K 15°) 455lm(@8W 3000K 24°) 445lm(@8W 3000K 36°) 302lm(@8W 3000K 50°)	E ON-OFF D 0-10V Dimming A DALI N No Driver	1 15° 2 24° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADDT	2 2"	1 Round Trim (IP44 Aperture)	LD07 LED 7W	395lm(@7W 3000K 24°) 380lm(@7W 3000K 36°) 348lm(@7W 3000K 50°)	A DALI N No Driver	2 24° 3 36° 5 50°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black

Example : ADDT21-LD08E230SWT



Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADDT	3 3"	1 Round Trim (IP44 Aperture)	LD08 LED 8W	375lm(@8W 3000K 8°)	E ON-OFF D 0-10V Dimming	S 8°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADDT	3 3"	1 Round Trim (IP44 Aperture)	LM07 COB 7W LM10 COB 10W LM13 COB 13W	438lm(@7W 3000K 15°) 554lm(@7W 3000K 24°) 456lm(@7W 3000K 36°) 378lm(@7W 3000K 55°) 542lm(@10W 3000K 15°) 685lm(@10W 3000K 24°)	E ON-OFF D 0-10V Dimming	1 15° 2 24° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADDT	3 3"	1 Round Trim (IP44 Aperture)	LM18 COB 13W	564lm(@10W 3000K 36°) 467lm(@10W 3000K 50°) 710lm(@13W 3000K 15°) 896lm(@13W 3000K 24°) 738lm(@13W 3000K 36°) 612lm(@13W 3000K 50°)	N No Driver A DALI	1 15° 2 24° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADDT	3 3"	1 Round Trim (IP44 Aperture)	LM13 COB 13W	935lm(@13W 3000K 18°) 1035lm(@13W 3000K 28°) 1024lm(@13W 3000K 36°) 677lm(@13W 3000K 50°)	N No Driver A DALI	1 18° 2 28° 3 38° 5 50°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black


Example : ADDT31-LM13E230SWT



Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADDT	4 4"	1 Round Trim (IP44 Aperture)	LD08 LED 8W	375lm(@8W 3000K 8°)	E ON-OFF D 0-10V Dimming	S 8°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADDT	4 4"	1 Round Trim (IP44 Aperture)	LM13 COB 13W LM18 COB 18W	884lm(@13W 3000K 15°) 1128lm(@13W 3000K 24°) 1204lm(@13W 3000K 36°) 995lm(@13W 3000K 50°) 1258lm(@18W 3000K 15°) 1604lm(@18W 3000K 24°)	E ON-OFF D 0-10V Dimming	1 15° 2 24° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADDT	4 4"	1 Round Trim (IP44 Aperture)	LM18 COB 18W	1712lm(@18W 3000K 36°) 1414lm(@18W 3000K 50°)	N No Driver A DALI	1 15° 2 24° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADDT	4 4"	1 Round Trim (IP44 Aperture)	LM18 COB 18W	1349lm(@18W 3000K 18°) 1384lm(@18W 3000K 28°) 1421lm(@18W 3000K 38°) 1184lm(@18W 3000K 50°)	N No Driver A DALI	1 18° 2 28° 3 38° 5 50°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black


Example : ADDT41-LM13E230SWT

Product Parameters



Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADDT	5 5"	1 Round Trim (IP44 Aperture)	LD24 LED 24W	1125lm(@24W 3000K 8°)	E ON-OFF D 0-10V Dimming	S 8°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADDT	5 5"	1 Round Trim (IP44 Aperture)	LM18 COB 18W LM25 COB 25W LM32 COB 32W	1609lm(@18W 3000K 15°) 1640lm(@18W 3000K 24°) 1783lm(@18W 3000K 36°) 1538lm(@18W 3000K 50°) 2111lm(@25W 3000K 15°) 2152lm(@25W 3000K 24°) 2340lm(@25W 3000K 36°) 2018lm(@25W 3000K 50°) 2630lm(@32W 3000K 15°) 2682lm(@32W 3000K 24°) 2916lm(@32W 3000K 36°) 2514lm(@32W 3000K 50°)	E ON-OFF D 0-10V Dimming	1 15° 2 24° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADDT	5 5"	1 Round Trim (IP44 Aperture)	LM32 COB 32W	2340lm(@25W 3000K 36°) 2018lm(@25W 3000K 50°) 2630lm(@32W 3000K 15°) 2682lm(@32W 3000K 24°) 2916lm(@32W 3000K 36°) 2514lm(@32W 3000K 50°)	N No Driver A DALI	1 15° 2 24° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADDT	5 5"	1 Round Trim (IP44 Aperture)	LM25 COB 25W	2094lm(@25W 3000K 18°) 1967lm(@25W 3000K 28°) 2142lm(@25W 3000K 38°) 1830lm(@25W 3000K 50°)	N No Driver A DALI	1 18° 2 28° 3 38° 5 50°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black





Example : ADDT51-LM18E230SWT







Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADDT	6 6"	1 Round Trim (IP44 Aperture)	LD32 LED 32W	1500lm(@32W 3000K 8°)	E ON-OFF D 0-10V Dimming	S 8°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADDT	6 6"	1 Round Trim (IP44 Aperture)	LM32 COB 32W LM43 COB 43W	2393lm(@32W 3000K 15°) 3015lm(@32W 3000K 24°) 3001lm(@32W 3000K 36°) 2830lm(@32W 3000K 50°) 3108lm(@43W 3000K 15°) 3916lm(@43W 3000K 24°) 3897lm(@43W 3000K 36°) 3675lm(@43W 3000K 50°)	E ON-OFF D 0-10V Dimming	1 15° 2 24° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADDT	6 6"	1 Round Trim (IP44 Aperture)	LM43 COB 43W	3897lm(@43W 3000K 36°) 3675lm(@43W 3000K 50°)	N No Driver A DALI	1 15° 2 24° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADDT	6 6"	1 Round Trim (IP44 Aperture)	LM43 COB 43W	3254lm(@43W 3000K 18°) 3271lm(@43W 3000K 28°) 3367lm(@43W 3000K 38°) 3249lm(@43W 3000K 50°)	N No Driver A DALI	1 18° 2 28° 3 38° 5 50°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black

Example : ADDT61-LM32E230SWT





ADDT21

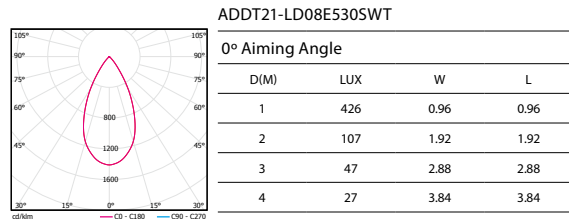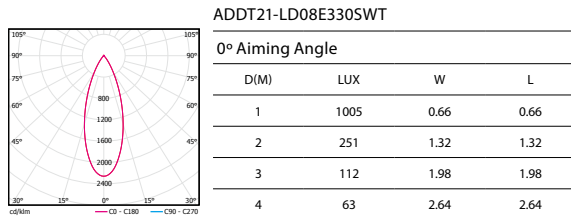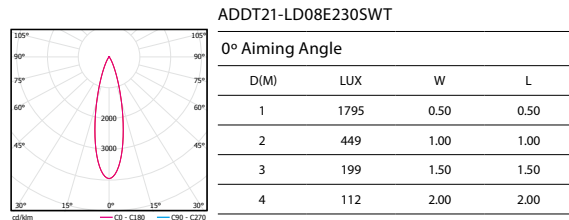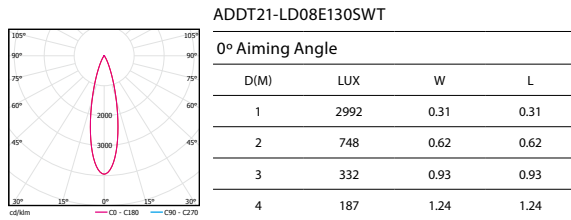

ADDT31

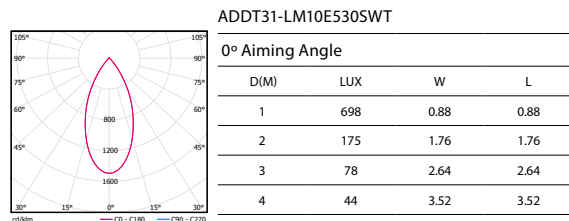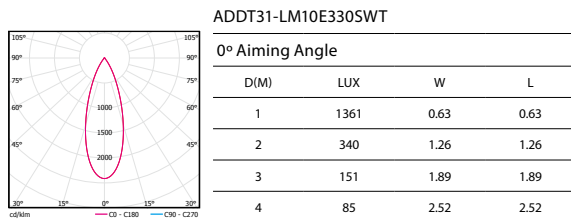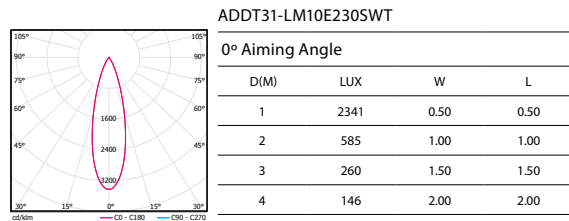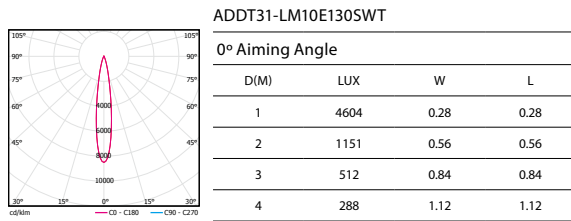


ADDT41

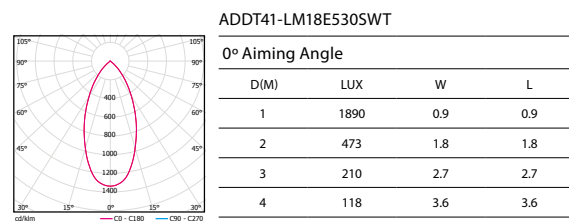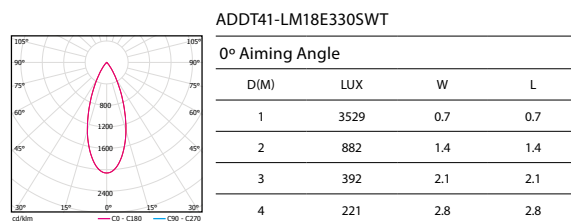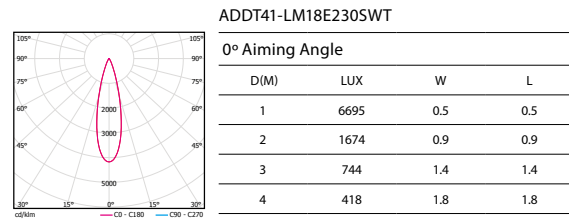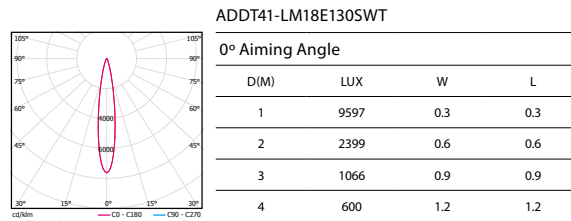

ADDT51


ADDT41-LM25E130SWT



0° Aiming Angle

D(M)	LUX	W	L
1	18431	0.3	0.3
2	4608	0.6	0.6
3	2048	0.9	0.9
4	1152	1.1	1.1


ADDT51-LM25E230SWT



0° Aiming Angle

D(M)	LUX	W	L
1	8847	0.5	0.5
2	2212	0.9	0.9
3	983	1.4	1.4
4	553	1.8	1.8


ADDT51-LM25E330SWT



0° Aiming Angle

D(M)	LUX	W	L
1	4905	0.7	0.7
2	1226	1.4	1.4
3	545	2.1	2.1
4	307	2.8	2.8

ADDT51-LM25E530SWT




0° Aiming Angle

D(M)	LUX	W	L
1	3033	0.9	0.9
2	758	1.7	1.7
3	337	2.6	2.6
4	190	3.4	3.4

ADDT61


ADDT61-LM43E130SWT



0° Aiming Angle

D(M)	LUX	W	L
1	30695	0.3	0.3
2	7674	0.5	0.5
3	3411	0.8	0.8
4	1918	1.1	1.1


ADDT61-LM43E230SWT



0° Aiming Angle

D(M)	LUX	W	L
1	17104	0.5	0.5
2	4276	0.9	0.9
3	1900	1.4	1.4
4	1069	1.8	1.8


ADDT61-LM43E330SWT



0° Aiming Angle

D(M)	LUX	W	L
1	8637	0.7	0.7
2	2159	1.3	1.3
3	960	2.0	2.0
4	540	2.7	2.7

ADDT61-LM43E530SWT



0° Aiming Angle

D(M)	LUX	W	L
1	4885	1.0	1.0
2	1221	1.9	1.9
3	543	2.9	2.9
4	305	3.8	3.8

Accessories

Lenses/Filters

Model	Beam Elongator 	Honeycomb 
ADDT21	ALENS-DLT21-BEL	ALENS-DLT21-HCL
ADDT31	ALENS-DDT31-BEL	ALENS-DDT31-HCL
ADDT41	ALENS-DDT41-BEL	ALENS-DDT41-HCL
ADDT51	ALENS-DDT51-BEL	ALENS-DDT51-HCL
ADDT61	ALENS-DDT61-BEL	ALENS-DDT61-HCL

Note: Only one piece accessory allowed and need to order separately

VOLTA ROUND WALL WASHER



ADWT31



ADWT41

Specifications




- Body Material: Die-cast aluminum
- Optical System: Wall Washer optical system
- Finish: Environmentally safe powder coat
- Wiring: Please refer to wiring schematic diagram at the end of catalog
- Cutout: Ø75mm / Ø100mm
- Ceiling Thickness: 1mm-20mm
- LED Type: COB
- LED Wattage, CCT, Lumen Output:
 - ADWT31 3000K: 800lm 7W / 1150lm 10W / 1495lm 13W
 - ADWT41 3000K: 14650lm 13W / 1975lm 13W
- LED Lifetime: >50,000h-L70 / B10-Ta25°C (LM-80/TM-21)
- LED Color Consistency: 3 SDCM
- Net Weight: 0.4Kg / 0.7Kg

Product Features/Optics




W Wall Washer

Product Parameters



Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADWT	3 3"	1 Round Trim	LM07 COB 7W LM10 COB 10W LM13 COB 13W	645lm(@13W 3000K)	E ON-OFF D 0-10V Dimming	W Wall Washer	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black	WT White BK Black
ADWT	3 4"	1 Round Trim	LM13 COB 13W	645lm(@13W 3000K)	A DALI N No Driver	W Wall Washer	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black	WT White BK Black

Example : ADWT31-LM10EW30BWT



Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADWT	4 4"	1 Round Trim	LM13 COB 13W LM18 COB 18W	1079lm(@18W 3000K)	E ON-OFF D 0-10V Dimming	W Wall Washer	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black	WT White BK Black
ADWT	4 4"	1 Round Trim	LM18 COB 18W	1079lm(@18W 3000K)	A DALI N No Driver	W Wall Washer	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black	WT White BK Black

Example : ADWT41-LM18EW30BWT

Light Distribution


ADWT31-LM13DW30BWT

Specifications :

Wall height (m) 3

Offset from Wall (m) 1

Luminaire spacing (m) 1



H (m)	Surface illumination (lux)				
	below the luminaire	between the luminaire	below the luminaire	between the luminaire	below the luminaire
2.85	38	44	45	45	37
2.55	152	174	175	173	152
2.25	255	288	289	287	253
1.95	260	299	301	299	257
1.65	218	258	260	258	217
1.35	164	203	206	203	165
1.05	119	153	156	153	120
0.75	85	112	115	112	85
0.45	60	80	83	80	60
0.15	45	60	62	60	44


ADWT41-LM18EW30SWT

Specifications :

Wall height (m) 3

Offset from Wall (m) 1

Luminaire spacing (m) 1



H (m)	Surface illumination (lux)				
	below the luminaire	between the luminaire	below the luminaire	between the luminaire	below the luminaire
2.85	134	135	136	134	133
2.55	393	365	397	364	393
2.25	572	526	577	526	573
1.95	589	574	595	575	590
1.65	489	498	495	499	490
1.35	366	374	373	374	367
1.05	259	262	266	262	260
0.75	178	179	184	179	179
0.45	122	123	127	123	122
0.15	84	85	88	85	84

VOLTA SQUARE DOWNLIGHT - DIRECTIONAL



ADLT05



ADDT15-LD02



ADDT15-LD05

Specifications



- Body Material: Aluminum
- Optical System: Clear Lens included+Honeycomb
- Finish: Environmentally safe powder coat
- Adjustable Angle:
 - ADDT15-LD02: 0°-360° horizontal rotation and -20°-20° vertical aiming tilt
 - ADDT15-LD05: 0°-25° vertical aiming tilt
- Wiring: Please refer to wiring schematic diagram at the end of catalog
- Cutout: Ø18mm / □ 36*36mm / □ 36*36mm
- Ceiling Thickness: 1mm-15mm
- Cut Off Angle:15°
- LED Type: High Power LED
- LED Wattage, CCT, Lumen Output:
 - ADLT05 3000K: 100lm
 - ADDT15 3000K: 175lm 2W / 500lm 5W
- LED Lifetime: >50,000h-L70 / B10-Ta25°C (LM-80/TM-21)
- LED Color Consistency: 3 SDCM
- Net Weight: 0.01Kg / 0.1Kg / 0.1Kg

Product Features/Optics



1 12°

1 15°/17°


2 24°

3 36°

5 50°/55°

6 60°

Product Parameters




Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish								
ADLT	0	0.5"	5	Square Trim	LD01	LED 1W	41lm(@1W 3000K 17°) 37lm(@1W 3000K 24°) 27lm(@1W 3000K 36°) 63lm(@1W 3000K 60°)	T DMX512 Dimming 24V DC Power Supply M MTB driver N No Driver	1	17°	27	2700K	W	White	WT	White	
									2	24°	30	3000K					
									3	36°	35	3500K					
									6	60°	40	4000K					
														B	Black	BK	Black

Example : ADLT05-LD01N230WWT


Note: Except for 60°, all other Honeycomb standard configured.

"MTB" needs to be ordered separately and cannot be directly connected to the mains power supply.



Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish			
ADDT	1	1"	5	Square Trim	LD02	LED 2W	91lm(@2W 3000K 13°) 95lm(@2W 3000K 24°) 89lm(@2W 3000K 36°) 74lm(@2W 3000K 55°)	E ON-OFF N No Driver	1 12°	27 2700K	W White	WT White
									2 24°	30 3000K		
									3 36°	35 3500K		
									5 55°	40 4000K		
										B Black	BK Black	





Example : ADDT15-LD02E230WWT







Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish			
ax ADDT	1	1"	5	Square Trim	LD05	LED 5W	274lm(@5W 3000K 15°) 235lm(@5W 3000K 24°) 218lm(@5W 3000K 36°) 184lm(@5W 3000K 50°)	E ON-OFF D 0-10V Dimming A DALI N No Driver	1 15°	27 2700K	W White	WT White
									2 24°	30 3000K		
									3 36°	35 3500K		
									5 50°	40 4000K 50 5000K		
										B Black	BK Black	

Example : ADDT15-LD05E230WWT





ADLT05

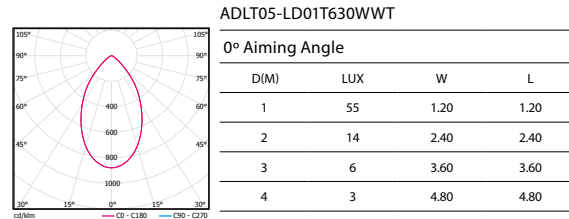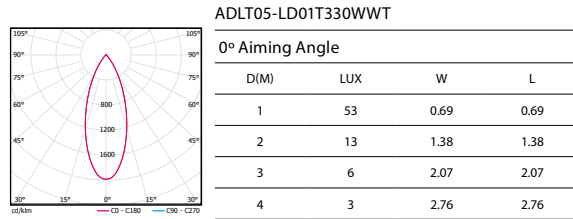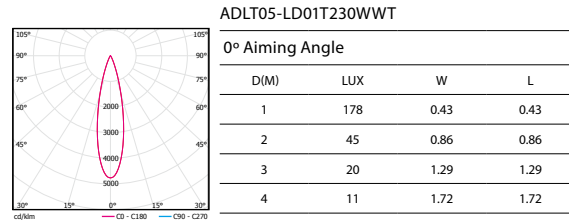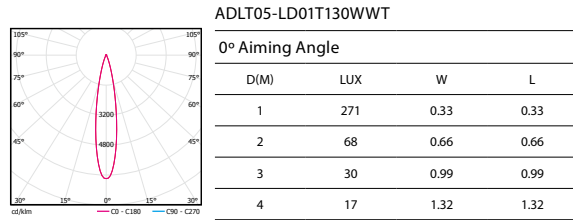

ADDT15-LD02

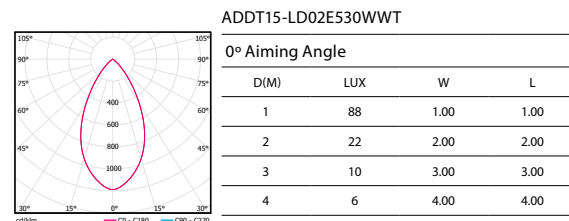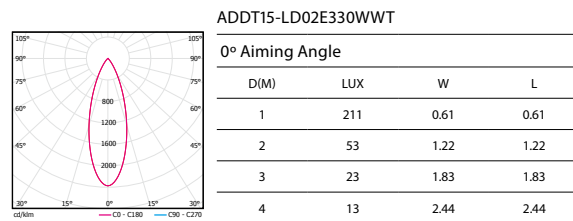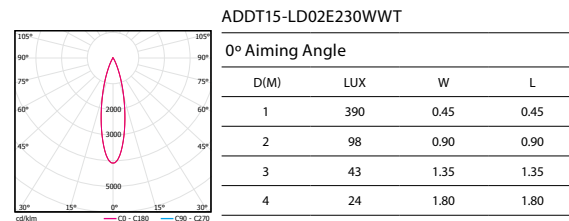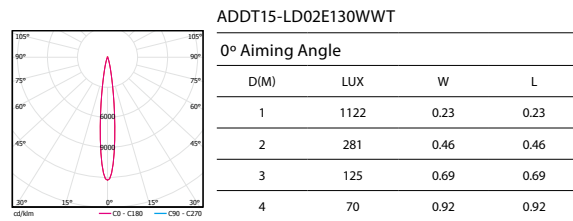

ADDT15-LD05

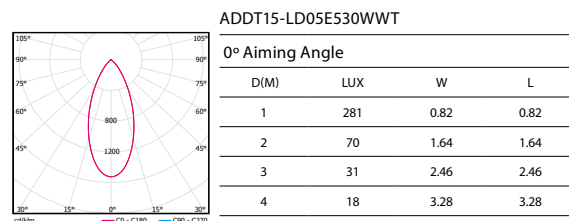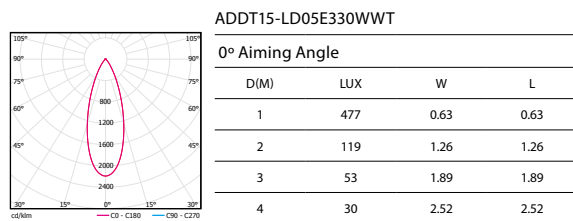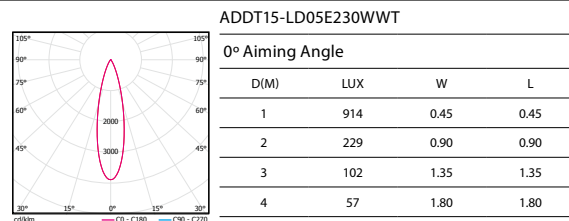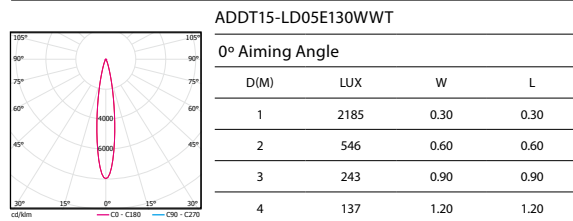



Mandarin Oriental Shenzhen
Shenzhen

VOLTA SQUARE DOWNLIGHT



ADLT25

ADLT35

ADLT45

ADLT55

ADLT65


Specifications



- Body Material: Aluminum
- Optical System: Clear Lens included+Reflector
- Finish: Environmentally safe powder coat
- Accessories/Brackets: Various Optical Accessories
- Wiring: Please refer to wiring schematic diagram at the end of catalog
- Net Weight: 0.2kg / 0.35kg / 0.7Kg / 1.1Kg / 1.7Kg

- Cutout: □ 55x55mm / □ 75x75mm / □ 100*100mm / □ 125*125mm / □ 150*150mm
- Ceiling Thickness: 1mm-15mm / 1mm-15mm / 1mm-20mm / 1mm-25mm / 1mm-30mm
- Cut Off Angle: 30°
- LED Type: COB
- LED Wattage, CCT, Lumen Output:
 - ADLT25 3000K: 720lm 8W
 - ADLT35 3000K: 720lm 8W / 800lm 7W / 1150lm 10W / 1495lm 13W
 - ADLT45 3000K: 720lm 8W / 1465lm 13W / 1975lm 18W
 - ADLT55 3000K: 1975lm 18W / 2160lm 24W / 2610lm 25W / 3255lm 32W
 - ADLT65 3000K: 3000lm 32W 8° / 3830lm 32W / 4505lm 43W
- LED Lifetime: >50,000h-L70 / B10-Ta25°C (LM-80/TM-21)
- LED Color Consistency: 3 SDCM

Product Features/Optics



S 8°


1 15°/18°

2 24°/28°

3 36°/38°


5 50°

Product Parameters




Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADLT	2 2"	5 Square Trim (IP44 Aperture)	LD08 LED 8W	397lm(@8W 3000K 15°) 455lm(@8W 3000K 24°) 445lm(@8W 3000K 36°) 302lm(@8W 3000K 50°)	E ON-OFF D 0-10V Dimming A DALI N No Driver	1 15° 2 24° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLT	2 2"	5 Square Trim (IP44 Aperture)	LD07 LED 7W	395lm(@7W 3000K 24°) 380lm(@7W 3000K 36°) 348lm(@7W 3000K 50°)	A DALI N No Driver	2 24° 3 36° 5 50°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black

Example : ADLT25-LD08E230SWT



Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADLT	3 3"	5 Square Trim (IP44 Aperture)	LD08 LED 8W	375lm(@8W 3000K 8°)	E ON-OFF D 0-10V Dimming	S 8°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLT	3 3"	5 Square Trim (IP44 Aperture)	LM07 COB 7W LM10 COB 10W LM13 COB 13W	438lm(@7W 3000K 15°) 554lm(@7W 3000K 24°) 456lm(@7W 3000K 36°) 378lm(@7W 3000K 55°) 542lm(@10W 3000K 15°) 685lm(@10W 3000K 24°)	E ON-OFF D 0-10V Dimming	1 15° 2 24° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLT	3 3"	5 Square Trim (IP44 Aperture)	LM18 COB 13W	564lm(@10W 3000K 36°) 467lm(@10W 3000K 55°) 710lm(@13W 3000K 15°) 896lm(@13W 3000K 24°) 738lm(@13W 3000K 36°) 612lm(@13W 3000K 50°)	N No Driver A DALI	1 15° 2 24° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLT	3 3"	5 Square Trim (IP44 Aperture)	LM13 COB 13W	935lm(@13W 3000K 18°) 1035lm(@13W 3000K 28°) 1024lm(@13W 3000K 36°) 677lm(@13W 3000K 50°)	N No Driver A DALI	1 18° 2 28° 3 38° 5 50°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black


Example : ADLT35-LM13E230SWT



Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADLT	4 4"	5 Square Trim (IP44 Aperture)	LD08 LED 8W	375lm(@8W 3000K 8°)	E ON-OFF D 0-10V Dimming	S 8°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLT	4 4"	5 Square Trim (IP44 Aperture)	LM13 COB 13W LM18 COB 18W	884lm(@13W 3000K 15°) 1128lm(@13W 3000K 24°) 1204lm(@13W 3000K 36°) 995lm(@13W 3000K 55°) 1258lm(@18W 3000K 15°) 1604lm(@18W 3000K 24°)	E ON-OFF D 0-10V Dimming	1 15° 2 24° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLT	4 4"	5 Square Trim (IP44 Aperture)	LM18 COB 18W	1712lm(@18W 3000K 36°) 1414lm(@18W 3000K 50°)	N No Driver A DALI	1 15° 2 24° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLT	4 4"	5 Square Trim (IP44 Aperture)	LM18 COB 18W	1349lm(@18W 3000K 18°) 1384lm(@18W 3000K 28°) 1421lm(@18W 3000K 38°) 1184lm(@18W 3000K 50°)	N No Driver A DALI	1 18° 2 28° 3 38° 5 50°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black


Example : ADLT45-LM13E230SWT

Product Parameters



Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADLT	5	5" Square Trim (IP44 Aperture)	LD24 LED 24W	1125lm(@24W 3000K 8°)	E ON-OFF D 0-10V Dimming	S 8°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLT	5	5" Square Trim (IP44 Aperture)	LM18 COB 18W LM25 COB 25W LM32 COB 32W	1609lm(@18W 3000K 15°) 1640lm(@18W 3000K 24°) 1783lm(@18W 3000K 36°) 1538lm(@18W 3000K 50°) 2111lm(@25W 3000K 15°) 2152lm(@25W 3000K 24°) 2340lm(@25W 3000K 36°) 2018lm(@25W 3000K 50°) 2630lm(@32W 3000K 15°) 2682lm(@32W 3000K 24°) 2916lm(@32W 3000K 36°) 2514lm(@32W 3000K 50°)	E ON-OFF D 0-10V Dimming	1 15° 2 24° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLT	5	5" Square Trim (IP44 Aperture)	LM32 COB 32W	2340lm(@25W 3000K 36°) 2018lm(@25W 3000K 50°) 2630lm(@32W 3000K 15°) 2682lm(@32W 3000K 24°) 2916lm(@32W 3000K 36°) 2514lm(@32W 3000K 50°)	N No Driver A DALI	1 15° 2 24° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLT	5	5" Square Trim (IP44 Aperture)	LM25 COB 25W	2094lm(@25W 3000K 18°) 1967lm(@25W 3000K 28°) 2142lm(@25W 3000K 38°) 1830lm(@25W 3000K 50°)	N No Driver A DALI	1 18° 2 28° 3 38° 5 50°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black


Example : ADLT55-LM18E230SWT



Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADLT	6	6" Square Trim (IP44 Aperture)	LD32 LED 32W	1500lm(@32W 3000K 8°)	E ON-OFF D 0-10V Dimming	S 8°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLT	6	6" Square Trim (IP44 Aperture)	LM32 COB 32W LM43 COB 43W	2393lm(@32W 3000K 15°) 3015lm(@32W 3000K 24°) 3001lm(@32W 3000K 36°) 2830lm(@32W 3000K 50°) 3108lm(@43W 3000K 15°) 3916lm(@43W 3000K 24°) 3897lm(@43W 3000K 36°) 3675lm(@43W 3000K 50°)	E ON-OFF D 0-10V Dimming	1 15° 2 24° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLT	6	6" Square Trim (IP44 Aperture)	LM43 COB 43W	3897lm(@43W 3000K 36°) 3675lm(@43W 3000K 50°)	N No Driver A DALI	1 15° 2 24° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLT	6	6" Square Trim (IP44 Aperture)	LM43 COB 43W	3254lm(@43W 3000K 18°) 3271lm(@43W 3000K 28°) 3367lm(@43W 3000K 38°) 3249lm(@43W 3000K 50°)	N No Driver A DALI	1 18° 2 28° 3 38° 5 50°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black

Example : ADLT65-LM32E230SWT


ADLT25



ADLT25-LD08E130SWT

0° Aiming Angle


D(M)	LUX	W	L
1	2992	0.31	0.31
2	748	0.62	0.62
3	332	0.93	0.93
4	187	1.24	1.24



ADLT25-LD08E230SWT

0° Aiming Angle


D(M)	LUX	W	L
1	1795	0.50	0.50
2	449	1.00	1.00
3	199	1.50	1.50
4	112	2.00	2.00



ADLT25-LD08E330SWT

0° Aiming Angle

D(M)	LUX	W	L
1	1005	0.66	0.66
2	251	1.32	1.32
3	112	1.98	1.98
4	63	2.64	2.64




ADLT25-LD08E530SWT

0° Aiming Angle

D(M)	LUX	W	L
1	426	0.96	0.96
2	107	1.92	1.92
3	47	2.88	2.88
4	27	3.84	3.84


ADLT35



ADLT35-LM10E130SWT

0° Aiming Angle


D(M)	LUX	W	L
1	4604	0.28	0.28
2	1151	0.56	0.56
3	512	0.84	0.84
4	288	1.12	1.12



ADLT35-LM10E230SWT

0° Aiming Angle


D(M)	LUX	W	L
1	2341	0.50	0.50
2	585	1.00	1.00
3	260	1.50	1.50
4	146	2.00	2.00



ADLT35-LM10E330SWT

0° Aiming Angle

D(M)	LUX	W	L
1	1361	0.63	0.63
2	340	1.26	1.26
3	151	1.89	1.89
4	85	2.52	2.52




ADLT35-LM10E530SWT

0° Aiming Angle

D(M)	LUX	W	L
1	698	0.88	0.88
2	175	1.76	1.76
3	78	2.64	2.64
4	44	3.52	3.52


ADLT45



ADLT45-LM18E130SWT

0° Aiming Angle


D(M)	LUX	W	L
1	9597	0.3	0.3
2	2399	0.6	0.6
3	1066	0.9	0.9
4	600	1.2	1.2



ADLT45-LM18E230SWT

0° Aiming Angle


D(M)	LUX	W	L
1	6695	0.5	0.5
2	1674	0.9	0.9
3	744	1.4	1.4
4	418	1.8	1.8



ADLT45-LM18E330SWT

0° Aiming Angle

D(M)	LUX	W	L
1	3529	0.7	0.7
2	882	1.4	1.4
3	392	2.1	2.1
4	221	2.8	2.8




ADLT45-LM18E530SWT

0° Aiming Angle

D(M)	LUX	W	L
1	1890	0.9	0.9
2	473	1.8	1.8
3	210	2.7	2.7
4	118	3.6	3.6


ADLT55



ADLT45-LM25E130SWT

0° Aiming Angle


D(M)	LUX	W	L
1	18431	0.3	0.3
2	4608	0.6	0.6
3	2048	0.9	0.9
4	1152	1.1	1.1



ADLT55-LM25E230SWT

0° Aiming Angle


D(M)	LUX	W	L
1	8847	0.5	0.5
2	2212	0.9	0.9
3	983	1.4	1.4
4	553	1.8	1.8



ADLT55-LM25E330SWT

0° Aiming Angle

D(M)	LUX	W	L
1	4905	0.7	0.7
2	1226	1.4	1.4
3	545	2.1	2.1
4	307	2.8	2.8




ADLT55-LM25E530SWT

0° Aiming Angle

D(M)	LUX	W	L
1	3033	0.9	0.9
2	758	1.7	1.7
3	337	2.6	2.6
4	190	3.4	3.4


ADLT65



ADLT65-LM43E130SWT

0° Aiming Angle


D(M)	LUX	W	L
1	30695	0.3	0.3
2	7674	0.5	0.5
3	3411	0.8	0.8
4	1918	1.1	1.1



ADLT65-LM43E230SWT

0° Aiming Angle


D(M)	LUX	W	L
1	17104	0.5	0.5
2	4276	0.9	0.9
3	1900	1.4	1.4
4	1069	1.8	1.8



ADLT65-LM43E330SWT

0° Aiming Angle

D(M)	LUX	W	L
1	8637	0.7	0.7
2	2159	1.3	1.3
3	960	2.0	2.0
4	540	2.7	2.7



ADLT65-LM43E530SWT

0° Aiming Angle

D(M)	LUX	W	L
1	4885	1.0	1.0
2	1221	1.9	1.9
3	543	2.9	2.9
4	305	3.8	3.8

Accessories

Lenses/Filters

Model	Beam Elongator	Honeycomb
		
ADLT25	ALENS-DLT21-BEL	ALENS-DLT21-HCL
ADLT35	ALENS-DLT31-BEL	ALENS-DLT31-HCL
ADLT45	ALENS-DLT41-BEL	ALENS-DLT41-HCL
ADLT55	ALENS-DLT51-BEL	ALENS-DLT51-HCL
ADLT65	ALENS-DLT61-BEL	ALENS-DLT61-HCL

Note: Only one piece accessory allowed and need to order separately

VOLTA SQUARE DIRECTIONAL



ADDT25

ADDT35

ADDT45

ADDT55


ADDT65

Specifications



- Body Material: Aluminum
- Optical System: Clear Lens included+Reflector
- Finish: Environmentally safe powder coat
- Accessories/Brackets: Various Optical Accessories
- Adjustable Angle: 0°-25° vertical aiming tilt
- Wiring: Please refer to wiring schematic diagram at the end of catalog
- Net Weight: 0.2kg / 0.35kg / 0.7Kg / 1.1Kg / 1.7Kg
- Cutout: □ 55x55mm / □ 75x75mm / □ 100*100mm / □ 125*125mm / □ 150*150mm
- Ceiling Thickness: 1mm-15mm / 1mm-15mm / 1mm-20mm / 1mm-25mm / 1mm-30mm
- Cut Off Angle: 30°
- LED Type: COB
- LED Wattage, CCT, Lumen Output:
 - ADDT25 3000K: 720lm 8W
 - ADDT35 3000K: 720lm 8W / 800lm 7W / 1150lm 10W / 1495lm 13W
 - ADDT45 3000K: 720lm 8W / 1465lm 13W / 1975lm 18W
 - ADDT55 3000K: 1975lm 18W / 2160lm 24W / 2610lm 25W / 3255lm 32W
 - ADDT65 3000K: 3000lm 32W 8° / 3830lm 32W / 4505lm 43W
- LED Lifetime: >50,000h-L70 / B10-Ta25°C (LM-80/TM-21)
- LED Color Consistency: 3 SDCM

Product Features/Optics

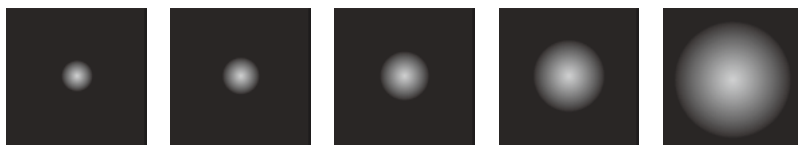

5 8°


1 15°/18°

2 24°/28°

3 36°/38°


5 50°

Product Parameters




Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADDT	2 2"	5 Square Trim (IP44 Aperture)	LD08 LED 8W	397lm(@8W 3000K 15°) 455lm(@8W 3000K 24°) 445lm(@8W 3000K 36°) 302lm(@8W 3000K 50°)	E ON-OFF D 0-10V Dimming A DALI N No Driver	1 15° 2 24° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADDT	2 2"	5 Square Trim (IP44 Aperture)	LD07 LED 7W	395lm(@7W 3000K 24°) 380lm(@7W 3000K 36°) 348lm(@7W 3000K 50°)	A DALI N No Driver	2 24° 3 36° 5 50°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black

Example :ADDT25-LD08E230SWT



Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADDT	3 3"	5 Square Trim (IP44 Aperture)	LD08 LED 8W	375lm(@8W 3000K 8°)	E ON-OFF D 0-10V Dimming	S 8°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADDT	3 3"	5 Square Trim (IP44 Aperture)	LM07 COB 7W LM10 COB 10W LM13 COB 13W	438lm(@7W 3000K 15°) 554lm(@7W 3000K 24°) 456lm(@7W 3000K 36°) 378lm(@7W 3000K 55°) 542lm(@10W 3000K 15°) 685lm(@10W 3000K 24°)	E ON-OFF D 0-10V Dimming	1 15° 2 24° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADDT	3 3"	5 Square Trim (IP44 Aperture)	LM18 COB 13W	564lm(@10W 3000K 36°) 467lm(@10W 3000K 55°) 710lm(@13W 3000K 15°) 896lm(@13W 3000K 24°) 738lm(@13W 3000K 36°) 612lm(@13W 3000K 50°)	N No Driver A DALI	1 15° 2 24° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADDT	3 3"	5 Square Trim (IP44 Aperture)	LM13 COB 13W	935lm(@13W 3000K 18°) 1035lm(@13W 3000K 28°) 1024lm(@13W 3000K 36°) 677lm(@13W 3000K 50°)	N No Driver A DALI	1 18° 2 28° 3 38° 5 50°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black


Example : ADDT35-LM13E230SWT



Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADDT	4 4"	5 Square Trim (IP44 Aperture)	LD08 LED 8W	375lm(@8W 3000K 8°)	E ON-OFF D 0-10V Dimming	S 8°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADDT	4 4"	5 Square Trim (IP44 Aperture)	LM13 COB 13W LM18 COB 18W	884lm(@13W 3000K 15°) 1128lm(@13W 3000K 24°) 1204lm(@13W 3000K 36°) 995lm(@13W 3000K 55°) 1258lm(@18W 3000K 15°) 1604lm(@18W 3000K 24°)	E ON-OFF D 0-10V Dimming	1 15° 2 24° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADDT	4 4"	5 Square Trim (IP44 Aperture)	LM18 COB 18W	1712lm(@18W 3000K 36°) 1414lm(@18W 3000K 50°)	N No Driver A DALI	1 15° 2 24° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADDT	4 4"	5 Square Trim (IP44 Aperture)	LM18 COB 18W	1349lm(@18W 3000K 18°) 1384lm(@18W 3000K 28°) 1421lm(@18W 3000K 38°) 1184lm(@18W 3000K 50°)	N No Driver A DALI	1 18° 2 28° 3 38° 5 50°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black


Example : ADDT45-LM13E230SWT

Product Parameters



Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADDT	5	5" Square Trim (IP44 Aperture)	LD24 LED 24W	1125lm(@24W 3000K 8°)	E ON-OFF D 0-10V Dimming	S 8°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADDT	5	5" Square Trim (IP44 Aperture)	LM18 COB 18W LM25 COB 25W LM32 COB 32W	1609lm(@18W 3000K 15°) 1640lm(@18W 3000K 24°) 1783lm(@18W 3000K 36°) 1538lm(@18W 3000K 50°) 2111lm(@25W 3000K 15°) 2152lm(@25W 3000K 24°) 2340lm(@25W 3000K 36°) 2018lm(@25W 3000K 50°) 2630lm(@32W 3000K 15°) 2682lm(@32W 3000K 24°) 2916lm(@32W 3000K 36°) 2514lm(@32W 3000K 50°)	E ON-OFF D 0-10V Dimming	1 15° 2 24° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADDT	5	5" Square Trim (IP44 Aperture)	LM32 COB 32W	2340lm(@25W 3000K 36°) 2018lm(@25W 3000K 50°) 2630lm(@32W 3000K 15°) 2682lm(@32W 3000K 24°) 2916lm(@32W 3000K 36°) 2514lm(@32W 3000K 50°)	N No Driver A DALI	1 15° 2 24° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADDT	5	5" Square Trim (IP44 Aperture)	LM25 COB 25W	2094lm(@25W 3000K 18°) 1967lm(@25W 3000K 28°) 2142lm(@25W 3000K 38°) 1830lm(@25W 3000K 50°)	N No Driver A DALI	1 18° 2 28° 3 38° 5 50°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black


Example : ADDT55-LM18E230SWT



Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADDT	6	6" Square Trim (IP44 Aperture)	LD32 LED 32W	1500lm(@32W 3000K 8°)	E ON-OFF D 0-10V Dimming	S 8°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADDT	6	6" Square Trim (IP44 Aperture)	LM32 COB 32W LM43 COB 43W	2393lm(@32W 3000K 15°) 3015lm(@32W 3000K 24°) 3001lm(@32W 3000K 36°) 2830lm(@32W 3000K 50°) 3108lm(@43W 3000K 15°) 3916lm(@43W 3000K 24°) 3897lm(@43W 3000K 36°) 3675lm(@43W 3000K 50°)	E ON-OFF D 0-10V Dimming	1 15° 2 24° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADDT	6	6" Square Trim (IP44 Aperture)	LM43 COB 43W	3897lm(@43W 3000K 36°) 3675lm(@43W 3000K 50°)	N No Driver A DALI	1 15° 2 24° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADDT	6	6" Square Trim (IP44 Aperture)	LM43 COB 43W	3254lm(@43W 3000K 18°) 3271lm(@43W 3000K 28°) 3367lm(@43W 3000K 38°) 3249lm(@43W 3000K 50°)	N No Driver A DALI	1 18° 2 28° 3 38° 5 50°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black

Example : ADDT65-LM32E230SWT


ADDT25



ADDT25-LD08E130SWT

0° Aiming Angle


D(M)	LUX	W	L
1	2992	0.31	0.31
2	748	0.62	0.62
3	332	0.93	0.93
4	187	1.24	1.24



ADDT25-LD08E230SWT

0° Aiming Angle


D(M)	LUX	W	L
1	1795	0.50	0.50
2	449	1.00	1.00
3	199	1.50	1.50
4	112	2.00	2.00



ADDT25-LD08E330SWT

0° Aiming Angle

D(M)	LUX	W	L
1	1005	0.66	0.66
2	251	1.32	1.32
3	112	1.98	1.98
4	63	2.64	2.64




ADDT25-LD08E530SWT

0° Aiming Angle

D(M)	LUX	W	L
1	426	0.96	0.96
2	107	1.92	1.92
3	47	2.88	2.88
4	27	3.84	3.84


ADDT35



ADDT35-LM10E130SWT

0° Aiming Angle


D(M)	LUX	W	L
1	4604	0.28	0.28
2	1151	0.56	0.56
3	512	0.84	0.84
4	288	1.12	1.12



ADDT35-LM10E230SWT

0° Aiming Angle


D(M)	LUX	W	L
1	2341	0.50	0.50
2	585	1.00	1.00
3	260	1.50	1.50
4	146	2.00	2.00



ADDT35-LM10E330SWT

0° Aiming Angle

D(M)	LUX	W	L
1	1361	0.63	0.63
2	340	1.26	1.26
3	151	1.89	1.89
4	85	2.52	2.52




ADDT35-LM10E530SWT

0° Aiming Angle

D(M)	LUX	W	L
1	698	0.88	0.88
2	175	1.76	1.76
3	78	2.64	2.64
4	44	3.52	3.52


ADDT45



ADDT45-LM18E130SWT

0° Aiming Angle


D(M)	LUX	W	L
1	9597	0.3	0.3
2	2399	0.6	0.6
3	1066	0.9	0.9
4	600	1.2	1.2



ADDT45-LM18E230SWT

0° Aiming Angle


D(M)	LUX	W	L
1	6695	0.5	0.5
2	1674	0.9	0.9
3	744	1.4	1.4
4	418	1.8	1.8



ADDT45-LM18E330SWT

0° Aiming Angle

D(M)	LUX	W	L
1	3529	0.7	0.7
2	882	1.4	1.4
3	392	2.1	2.1
4	221	2.8	2.8




ADDT45-LM18E530SWT

0° Aiming Angle

D(M)	LUX	W	L
1	1890	0.9	0.9
2	473	1.8	1.8
3	210	2.7	2.7
4	118	3.6	3.6


ADDT55



ADDT55-LM25E130SWT

0° Aiming Angle


D(M)	LUX	W	L
1	18431	0.3	0.3
2	4608	0.6	0.6
3	2048	0.9	0.9
4	1152	1.1	1.1



ADDT55-LM25E230SWT

0° Aiming Angle


D(M)	LUX	W	L
1	8847	0.5	0.5
2	2212	0.9	0.9
3	983	1.4	1.4
4	553	1.8	1.8



ADDT55-LM25E330SWT

0° Aiming Angle

D(M)	LUX	W	L
1	4905	0.7	0.7
2	1226	1.4	1.4
3	545	2.1	2.1
4	307	2.8	2.8




ADDT55-LM25E530SWT

0° Aiming Angle

D(M)	LUX	W	L
1	3033	0.9	0.9
2	758	1.7	1.7
3	337	2.6	2.6
4	190	3.4	3.4


ADDT65



ADDT65-LM43E130SWT

0° Aiming Angle


D(M)	LUX	W	L
1	30695	0.3	0.3
2	7674	0.5	0.5
3	3411	0.8	0.8
4	1918	1.1	1.1



ADDT65-LM43E230SWT

0° Aiming Angle


D(M)	LUX	W	L
1	17104	0.5	0.5
2	4276	0.9	0.9
3	1900	1.4	1.4
4	1069	1.8	1.8



ADDT65-LM43E330SWT

0° Aiming Angle

D(M)	LUX	W	L
1	8637	0.7	0.7
2	2159	1.3	1.3
3	960	2.0	2.0
4	540	2.7	2.7




ADDT65-LM43E530SWT

0° Aiming Angle

D(M)	LUX	W	L
1	4885	1.0	1.0
2	1221	1.9	1.9
3	543	2.9	2.9
4	305	3.8	3.8

Accessories

Lenses/Filters

Model	Beam Elongator 	Honeycomb 
ADDT25	ALENS-DLT21-BEL	ALENS-ADLT21-HCL
ADDT35	ALENS-DDT31-BEL	ALENS-DDT31-HCL
ADDT45	ALENS-DDT41-BEL	ALENS-DDT41-HCL
ADDT55	ALENS-DDT51-BEL	ALENS-DDT51-HCL
ADDT65	ALENS-DDT61-BEL	ALENS-DDT61-HCL

Note: Only one piece accessory allowed and need to order separately

VOLTA SMART



Specifications



- Body Material: Die-cast aluminum
- Optical System: Clear Lens included
- Finish: Environmentally safe powder coat
- Adjustable Angle: 0°-355° horizontal rotation and 0°-30° vertical aiming tilt
- Accessories/Brackets: Remote Controller
- Wiring: Please refer to wiring schematic diagram at the end of catalog
- Cutout: Ø160mm
- Ceiling Thickness: 1mm-25mm
- Cut Off Angle: 15°
- LED Type: High Power LED(7°) / COB(10°/24°/36°)
- LED Wattage, CCT, Lumen Output: 3000K 2250lm 20W
3000K 3350lm 30W
- LED Lifetime: >50,000h-L70 / B10-Ta25°C (LM-80/TM-21)
- LED Color Consistency: 3 SDCM
- Net Weight: 2.6Kg

Product Features/Optics



S 7°


1 10°

2 24°

3 36°

Multiple options for dimming

Product Parameters




Model	Size	Trim	LED Power	System CBCP	Driver	Beam	CCT	Reflector	Finish		
ADDT	6	6"	9	Round Trim	LD20 20W LD30 30W	27692cd(20W @3000K 10°) 10831cd(20W @3000K 24°) 5737cd(20W @3000K 36°) 38323cd(30W @3000K 10°) 14988cd(30W @3000K 24°) 7912cd(30W @3000K 36°)	B APP G Remote Control D 0-10V+Remote Control M DMX512+Remote Control W DMX512	S 7° 1 10° 2 24° 3 36° F 15°-40°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	W White	WT Black
										B Black	BK Black

Example: ADDT69-LM20G130WWT
Note: Honeycomb standard configured

Light Distribution


ADDT69



ADDT69-LM30G127WWT

0° Aiming Angle


D(M)	LUX	W	L
1	30436	0.21	0.21
2	7609	0.42	0.42
3	3382	0.63	0.63
4	1902	0.84	0.84



ADDT69-LM30G227WWT

0° Aiming Angle

D(M)	LUX	W	L
1	15844	0.33	0.33
2	3961	0.66	0.66
3	1760	0.99	0.99
4	990	1.32	1.32



ADDT69-LM30G327WWT

0° Aiming Angle

D(M)	LUX	W	L
1	5344	0.61	0.61
2	1336	1.22	1.22
3	594	1.83	1.83
4	334	2.44	2.44

Accessories

Model	Remote Controller
ADDT69	APAD-DDT69-WT

Note: The handheld remote controller needs to be ordered separately. The maximum number of matching luminaires is 10, and the maximum distance is 10 meters. Please refer to the installation manual for details.



Guoshou Narada Grand Hotel
Hangzhou, China



ULTRA



Stable for down-lighting & Flexible for adjusting angles



13°



18°



28°



36°



50°

Easy replacement of lenses for rich illumination effects

ULTRA ROUND TRIM DOWNLIGHT-DIRECTIONAL




ADLN21

ADLN31


ADLN41

Specifications




- Body Material: Aluminum
- Optical System: Clear Lens included+Reflector
- Finish: Environmentally safe powder coat
- Adjustable Angle: 0°-360° horizontal rotation and 0°-30° vertical aiming tilt
- Wiring: Please refer to wiring schematic diagram at the end of catalog
- Cutout: Ø55mm / Ø78mm / Ø100mm
- Ceiling Thickness: 5mm-15mm / 5mm-25mm / 5mm-25mm
- Cut Off Angle: 35°
- LED Type: COB
- LED Wattage, CCT, Lumen Output:
 - ADLN21 3000K:564lm 5W / 728lm 7W
 - ADLN31 3000K:720lm 8W / 800lm 7W / 1150lm 10W / 1495lm 13W
 - ADLN41 3000K:720lm 8W / 1645lm 13W / 2220lm 18W / 2960lm 25W
- LED Lifetime: >50,000h-L70 / B10-Ta25°C (LM-80/TM-21)
- LED Color Consistency: 3 SDCM
- Net Weight: 0.12Kg / 0.45Kg / 0.8Kg

Product Features/Optics

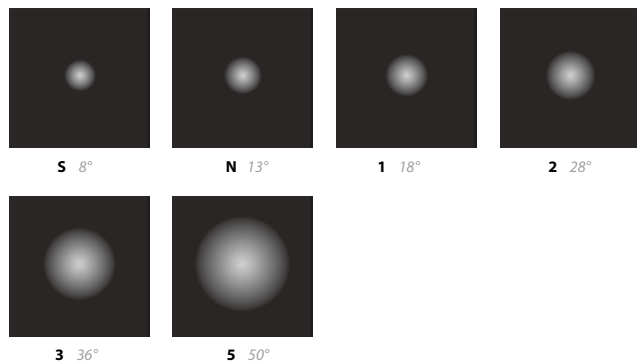


Both Honeycomb and Clear Lenses are interchangeable

Product Parameters




Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADLN	2 2"	1 Round Trim	LM05 COB 5W LM07 COB 7W	316lm(@7W 3000K 15°) 526lm(@7W 3000K 24°) 509lm(@7W 3000K 36°) 452lm(@7W 3000K 50°)	E ON-OFF D 0-10V Dimming	1 15° 2 24° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLN	2 2"	1 Round Trim	LM07 COB 7W	316lm(@7W 3000K 15°) 526lm(@7W 3000K 24°) 509lm(@7W 3000K 36°) 452lm(@7W 3000K 50°)	N No Driver A DALI	1 15° 2 24° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLN	2 2"	1 Round Trim	LM07 COB 7W	395lm(@7W 3000K 24°) 380lm(@7W 3000K 36°) 348lm(@7W 3000K 50°)	N No Driver A DALI	2 24° 3 36° 5 50°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black

Example : ADLN21-LM07E230SWT



Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADLN	3 3"	1 Round Trim	LM08 COB 8W	375lm(@8W 3000K 8°)	E ON-OFF D 0-10V Dimming	S 8°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLN	3 3"	1 Round Trim	LM07 COB 7W LM10 COB10W LM13 COB13W	533lm(@7W 3000K 13°) 585lm(@7W 3000K 18°) 641lm(@7W 3000K 28°) 643lm(@7W 3000K 36°) 425lm(@7W 3000K 50°) 643lm(@10W 3000K 13°) 790lm(@10W 3000K 28°) 804lm(@10W 3000K 36°) 532lm(@10W 3000K 50°) 820lm(@13W 3000K 13°) 935lm(@13W 3000K 18°) 1035lm(@13W 3000K 28°) 1024lm(@13W 3000K 36°) 677lm(@13W 3000K 50°)	E ON-OFF D 0-10V Dimming	N 13° 1 18° 2 28° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLN	3 3"	1 Round Trim	LM13 COB 13W	714lm(@10W 3000K 18°) 790lm(@10W 3000K 28°) 804lm(@10W 3000K 36°) 532lm(@10W 3000K 50°) 820lm(@13W 3000K 13°) 935lm(@13W 3000K 18°) 1035lm(@13W 3000K 28°) 1024lm(@13W 3000K 36°) 677lm(@13W 3000K 50°)	N No Driver A DALI	N 13° 1 18° 2 28° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLN	3 3"	1 Round Trim	LM13 COB 13W	688lm(@13W 3000K 18°) 1042lm(@13W 3000K 24°) 923lm(@13W 3000K 36°) 740lm(@13W 3000K 50°)	N No Driver A DALI	1 18° 2 28° 3 36° 5 50°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black

Example : ADLN31-LM07E230SWT




Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADLN	4 4"	1 Round Trim	LM08 COB 8W	375lm(@8W 3000K 8°)	E ON-OFF D 0-10V Dimming	S 8°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLN	4 4"	1 Round Trim	LM13 COB 13W LM18 COB 18W LM25 COB 25W	969lm(@13W 3000K 13°) 1135lm(@13W 3000K 19°) 1327lm(@13W 3000K 28°) 1268lm(@13W 3000K 36°) 1237lm(@13W 3000K 50°) 1309lm(@18W 3000K 13°) 1533lm(@18W 3000K 19°) 1793lm(@18W 3000K 28°) 1714lm(@18W 3000K 36°) 1671lm(@18W 3000K 50°) 1716lm(@25W 3000K 13°) 2009lm(@25W 3000K 19°) 2351lm(@25W 3000K 28°) 2246lm(@25W 3000K 36°) 2190lm(@25W 3000K 50°)	E ON-OFF D 0-10V Dimming	N 13° 1 19° 2 28° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLN	4 4"	1 Round Trim	LM25 COB 25W	1793lm(@18W 3000K 28°) 1714lm(@18W 3000K 36°) 1671lm(@18W 3000K 50°) 1716lm(@25W 3000K 13°) 2009lm(@25W 3000K 19°) 2351lm(@25W 3000K 28°) 2246lm(@25W 3000K 36°) 2190lm(@25W 3000K 50°)	N No Driver A DALI	N 13° 1 19° 2 28° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLN	4 4"	1 Round Trim	LM25 COB 25W	1672lm(@25W 3000K 18°) 1821lm(@25W 3000K 28°) 1502lm(@25W 3000K 36°) 1469lm(@25W 3000K 50°)	N No Driver A DALI	1 18° 2 28° 3 36° 5 50°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black

Example : ADLN41-LM13E230SWT


ADLN21

ADLN21-LM07E130SWT




0° Aiming Angle			
D(M)	LUX	W	L
1	2919	0.3	0.3
2	730	0.6	0.6
3	324	0.8	0.8
4	182	1.1	1.1

ADLN21-LM07E230SWT



0° Aiming Angle			
D(M)	LUX	W	L
1	2442	0.4	0.4
2	611	0.9	0.9
3	271	1.3	1.3
4	153	1.7	1.7


ADLN21-LM07E330SWT



0° Aiming Angle			
D(M)	LUX	W	L
1	1183	0.7	0.7
2	296	1.3	1.3
3	131	2.0	2.0
4	74	2.6	2.6


ADLN31

ADLN31-LM13E130SWT




0° Aiming Angle			
D(M)	LUX	W	L
1	6848	0.3	0.3
2	1712	0.7	0.7
3	761	1.0	1.0
4	428	1.3	1.3

ADLN31-LM13E230SWT




0° Aiming Angle			
D(M)	LUX	W	L
1	4510	0.5	0.5
2	1128	1.0	1.0
3	501	1.4	1.4
4	282	1.9	1.9

ADLN31-LM13E330SWT



0° Aiming Angle			
D(M)	LUX	W	L
1	2375	0.7	0.7
2	594	1.4	1.4
3	264	2.1	2.1
4	148	2.8	2.8


ADLN31-LM13E530SWT



0° Aiming Angle			
D(M)	LUX	W	L
1	913	0.9	0.9
2	228	1.8	1.8
3	101	2.8	2.8
4	57	3.7	3.7


ADLN41

ADLN41-LM25E130SWT




0° Aiming Angle			
D(M)	LUX	W	L
1	10294	0.4	0.4
2	2574	0.8	0.8
3	1144	1.1	1.1
4	643	1.5	1.5

ADLN41-LM25E230SWT




0° Aiming Angle			
D(M)	LUX	W	L
1	9615	0.5	0.5
2	2404	1.0	1.0
3	1068	1.5	1.5
4	601	2.0	2.0

ADLN41-LM25E330SWT



0° Aiming Angle			
D(M)	LUX	W	L
1	4821	0.7	0.7
2	1205	1.3	1.3
3	536	2.0	2.0
4	301	2.7	2.7


ADLN41-LM25E530SWT



0° Aiming Angle			
D(M)	LUX	W	L
1	3263	0.9	0.9
2	816	1.7	1.7
3	363	2.6	2.6
4	204	3.5	3.5

Accessories

Lenses/Filters

Model	Beam Elongator (CLASS I) 	SOFT BEAM ALENS (CLASS I) 	FROSTED GLASS (CLASS I) 	Honeycomb (CLASS I) 
ADLN21	ALENS-08-BEL	ALENS-08-BSL	ALENS-08-FR	ALENS-08-HCL
ADLN31	ALENS-11-BEL	ALENS-11-BSL-ULTRA	ALENS-11-FR	ALENS-11-HCL-ULTRA
ADLN41	ALENS-16-BEL-C	ALENS-16-BEL-SW	/	ALENS-16-HCL-ULTRA

Note; Only one piece accessory allowed and need to order separately

ULTRA ROUND TRIMLESS DOWNLIGHT-DIRECTIONAL




ADLN22

ADLN32


ADLN42

Specifications




- Body Material: Aluminum
- Optical System: Clear Lens included+Reflector
- Finish: Environmentally safe powder coat
- Adjustable Angle: 0°-360° horizontal rotation and 0°-30° vertical aiming tilt
- Wiring: Please refer to wiring schematic diagram at the end of catalog
- Cutout: Ø60mm / Ø82mm / Ø105mm
- Ceiling Thickness: 5mm-15mm / 5mm-25mm / 5mm-25mm
- Cut Off Angle: 35°
- LED Type: COB
- LED Wattage, CCT, Lumen Output:
 - ADLN22 3000K:624lm 5W / 780lm 7W
 - ADLN32 3000K:720lm 8W / 800lm 7W / 1080lm 10W / 1495lm 13W
 - ADLN42 3000K:720lm 8W / 1645lm 13W / 2220lm 18W / 2960lm 25W
- LED Lifetime: >50,000h-L70 / B10-Ta25°C (LM-80/TM-21)
- LED Color Consistency: 3 SDCM
- Net Weight: 0.14Kg / 0.45Kg / 0.8Kg

Product Features/Optics

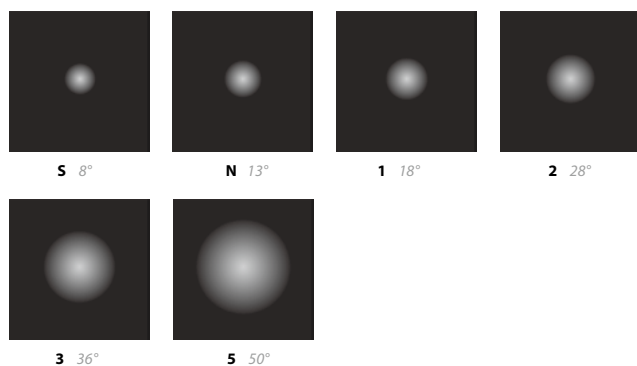


Both Honeycomb and Clear Lenses are interchangeable

Product Parameters




Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADLN	2	2" Round Trimless	LM05 COB 5W LM07 COB 7W	316lm(@7W 3000K 15°) 526lm(@7W 3000K 24°) 509lm(@7W 3000K 36°)	E ON-OFF D 0-10V Dimming	1 15°	27 2700K	B Black S Specular	WT White BK Black
						2 24°	30 3000K		
						3 36°	35 3500K		
						5 50°	40 4000K 50 5000K		
ADLN	2	2" Round Trimless	LM07 COB 5W COB 7W	316lm(@7W 3000K 15°) 526lm(@7W 3000K 24°) 509lm(@7W 3000K 36°)	N No Driver A DALI	1 15°	27 2700K	B Black S Specular	WT White BK Black
						2 24°	30 3000K		
						3 36°	35 3500K		
						5 50°	40 4000K 50 5000K		
ADLN	2	2" Round Trimless	LM07 COB 7W	395lm(@7W 3000K 24°) 380lm(@7W 3000K 36°) 348lm(@7W 3000K 50°)	N No Driver A DALI	2 24°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black
						3 36°			
						5 50°			

Example : ADLN22-LM07E230SWT



Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADLN	3	3" Round Trimless	LM08 COB 8W	375lm(@8W 3000K 8°)	E ON-OFF D 0-10V Dimming	S 8°	27 2700K	B Black S Specular	WT White BK Black
							30 3000K		
							35 3500K		
							40 4000K 50 5000K		
ADLN	3	3" Round Trimless	LM07 COB 7W LM10 COB 10W LM13 COB 13W	533lm(@7W 3000K 13°) 585lm(@7W 3000K 18°) 641lm(@7W 3000K 28°) 643lm(@7W 3000K 36°) 425lm(@7W 3000K 50°)	E ON-OFF D 0-10V Dimming	N 13°	27 2700K	B Black S Specular	WT White BK Black
						1 18°	30 3000K		
						2 28°	35 3500K		
						3 36°	40 4000K 50 5000K		
ADLN	3	3" Round Trimless	LM13 COB 13W	714lm(@10W 3000K 13°) 790lm(@10W 3000K 28°) 804lm(@10W 3000K 36°) 532lm(@10W 3000K 50°) 820lm(@13W 3000K 13°) 935lm(@13W 3000K 18°) 1035lm(@13W 3000K 28°) 1024lm(@13W 3000K 36°) 677lm(@13W 3000K 50°)	N No Driver A DALI	N 13°	27 2700K	B Black S Specular	WT White BK Black
						1 18°	30 3000K		
						2 28°	35 3500K		
						3 36°	40 4000K 50 5000K		
ADLN	3	3" Round Trimless	LM13 COB 13W	935lm(@13W 3000K 18°) 1035lm(@13W 3000K 28°) 1024lm(@13W 3000K 36°) 677lm(@13W 3000K 50°)	N No Driver A DALI	1 18°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black
						2 28°			
						3 36°			
						5 50°			


Example : ADLN32-LM07E230SWT



Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADLN	4	4" Round Trimless	LM08 COB 8W	375lm(@8W 3000K 8°)	E ON-OFF D 0-10V Dimming	S 8°	27 2700K	B Black S Specular	WT White BK Black
							30 3000K		
							35 3500K		
							40 4000K 50 5000K		
ADLN	4	4" Round Trimless	LM13 COB 13W LM18 COB 18W LM25 COB 25W	969lm(@13W 3000K 13°) 1135lm(@13W 3000K 19°) 1327lm(@13W 3000K 28°) 1268lm(@13W 3000K 36°) 1237lm(@13W 3000K 50°) 1309lm(@18W 3000K 13°) 1533lm(@18W 3000K 19°)	E ON-OFF D 0-10V Dimming	N 13°	27 2700K	B Black S Specular	WT White BK Black
						1 19°	30 3000K		
						2 28°	35 3500K		
						3 36°	40 4000K 50 5000K		
ADLN	4	4" Round Trimless	LM25 COB 25W	1793lm(@18W 3000K 28°) 1714lm(@18W 3000K 36°) 1671lm(@18W 3000K 50°) 1716lm(@25W 3000K 13°) 2009lm(@25W 3000K 19°) 2351lm(@25W 3000K 28°) 2246lm(@25W 3000K 36°) 2190lm(@25W 3000K 50°)	N No Driver A DALI	N 13°	27 2700K	B Black S Specular	WT White BK Black
						1 19°	30 3000K		
						2 28°	35 3500K		
						3 36°	40 4000K 50 5000K		
ADLN	4	4" Round Trimless	LM25 COB 25W	1672lm(@25W 3000K 18°) 1821lm(@25W 3000K 28°) 1502lm(@25W 3000K 36°) 1469lm(@25W 3000K 50°)	N No Driver A DALI	1 18°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black
						2 28°			
						3 36°			
						5 50°			

Example : ADLN42-LM13E230SWT


ADLN22



ADLN22-LM07E130SWT

0° Aiming Angle


D(M)	LUX	W	L
1	2919	0.3	0.3
2	730	0.6	0.6
3	324	0.8	0.8
4	182	1.1	1.1



ADLN22-LM07E230SWT

0° Aiming Angle

D(M)	LUX	W	L
1	2442	0.4	0.4
2	611	0.9	0.9
3	271	1.3	1.3
4	153	1.7	1.7




ADLN22-LM07E330SWT

0° Aiming Angle

D(M)	LUX	W	L
1	1183	0.7	0.7
2	296	1.3	1.3
3	131	2.0	2.0
4	74	2.6	2.6


ADLN32



ADLN32-LM13E130SWT

0° Aiming Angle


D(M)	LUX	W	L
1	6848	0.3	0.3
2	1712	0.7	0.7
3	761	1.0	1.0
4	428	1.3	1.3



ADLN32-LM13E230SWT

0° Aiming Angle


D(M)	LUX	W	L
1	4510	0.5	0.5
2	1128	1.0	1.0
3	501	1.4	1.4
4	282	1.9	1.9



ADLN32-LM13E330SWT

0° Aiming Angle

D(M)	LUX	W	L
1	2375	0.7	0.7
2	594	1.4	1.4
3	264	2.1	2.1
4	148	2.8	2.8




ADLN32-LM13E530SWT

0° Aiming Angle

D(M)	LUX	W	L
1	913	0.9	0.9
2	228	1.8	1.8
3	101	2.8	2.8
4	57	3.7	3.7


ADLN42



ADLN42-LM25E130SWT

0° Aiming Angle


D(M)	LUX	W	L
1	10294	0.4	0.4
2	2574	0.8	0.8
3	1144	1.1	1.1
4	643	1.5	1.5



ADLN42-LM25E230SWT

0° Aiming Angle


D(M)	LUX	W	L
1	9615	0.5	0.5
2	2404	1.0	1.0
3	1068	1.5	1.5
4	601	2.0	2.0



ADLN42-LM25E330SWT

0° Aiming Angle

D(M)	LUX	W	L
1	4821	0.7	0.7
2	1205	1.3	1.3
3	536	2.0	2.0
4	301	2.7	2.7




ADLN42-LM25E530SWT

0° Aiming Angle

D(M)	LUX	W	L
1	3263	0.9	0.9
2	816	1.7	1.7
3	363	2.6	2.6
4	204	3.5	3.5

Accessories

Lenses/Filters

Model	Beam Elongator (CLASS I) 	SOFT BEAM ALENS (CLASS I) 	FROSTED GLASS (CLASS I) 	Honeycomb (CLASS I) 
ADLN22	ALENS-08-BEL	ALENS-08-BSL	ALENS-08-FR	ALENS-08-HCL
ADLN32	ALENS-11-BEL	ALENS-11-BSL-ULTRA	ALENS-11-FR	ALENS-11-HCL-ULTRA
ADLN42	ALENS-16-BEL-C	ALENS-16-BEL-SW	/	ALENS-16-HCL-ULTRA

Note: Only one piece accessory allowed and need to order separately

ULTRA SQUARE TRIM DOWNLIGHT-DIRECTIONAL



ADLN25

ADLN35


ADLN45

Specifications




- Body Material: Aluminum
- Optical System: Clear Lens included+Reflector
- Finish: Environmentally safe powder coat
- Adjustable Angle: 0°-360° horizontal rotation and 0°-30° vertical aiming tilt
- Wiring: Please refer to wiring schematic diagram at the end of catalog
- Cutout: □ 55*55mm / □ 79*79mm / □ 100*100 mm
- Ceiling Thickness: 5mm-15mm / 5mm-25mm / 5mm-25mm
- Cut Off Angle: 35°
- LED Type: COB
- LED Wattage, CCT, Lumen Output:
 - ADLN25 3000K:624lm 5W / 780lm 7W
 - ADLN35 3000K:720lm 8W / 800lm 7W / 1080lm 10W / 1495lm 13W
 - ADLN45 3000K:720lm 8W / 1645lm 13W / 2220lm 18W / 2960lm 25W
- LED Lifetime: >50,000h-L70 / B10-Ta25°C (LM-80/TM-21)
- LED Color Consistency: 3 SDCM
- Net Weight: 0.12Kg / 0.45Kg / 0.8Kg

Product Features/Optics

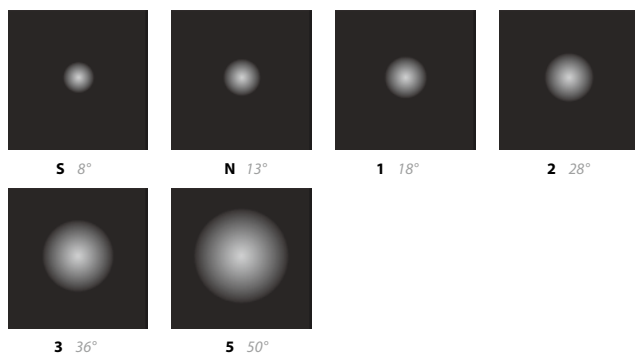


Both Honeycomb and CLEAR LENS are interchangeable

Product Parameters




Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADLN	2 2"	5 Rectangular Trim	LM05 COB 5W LM07 COB 7W	316lm(@7W 3000K 15°) 526lm(@7W 3000K 24°) 509lm(@7W 3000K 36°)	E ON-OFF D 0-10V Dimming	1 15°	27 2700K	B Black S Specular	WT White BK Black
						2 24°	30 3000K		
						3 36°	35 3500K		
						5 50°	40 4000K		
							50 5000K		
ADLN	2 2"	5 Rectangular Trim	LM07 COB 7W	316lm(@7W 3000K 15°) 526lm(@7W 3000K 24°) 509lm(@7W 3000K 36°)	N No Driver A DALI	1 15°	27 2700K	B Black S Specular	WT White BK Black
						2 24°	30 3000K		
						3 36°	35 3500K		
						5 50°	40 4000K		
							50 5000K		
ADLN	2 2"	5 Rectangular Trim	LM07 COB 7W	395lm(@7W 3000K 24°) 380lm(@7W 3000K 36°) 348lm(@7W 3000K 50°)	N No Driver A DALI	2 24°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black
						3 36°			
						5 50°			

Example : ADLN25-LM07E230SWT



Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADLN	3 3"	5 Rectangular Trim	LM08 COB 8W	375lm(@8W 3000K 8°)	E ON-OFF D 0-10V Dimming	S 8°	27 2700K	B Black S Specular	WT White BK Black
							30 3000K		
							35 3500K		
							40 4000K		
							50 5000K		
ADLN	3 3"	5 Rectangular Trim	LM07 COB 7W LM10 COB10W LM13 COB13W	533lm(@7W 3000K 13°) 585lm(@7W 3000K 18°) 641lm(@7W 3000K 28°) 643lm(@7W 3000K 36°) 425lm(@7W 3000K 50°) 643lm(@10W 3000K 13°) 714lm(@10W 3000K 18°) 790lm(@10W 3000K 28°) 804lm(@10W 3000K 36°) 532lm(@10W 3000K 50°) 820lm(@13W 3000K 13°) 935lm(@13W 3000K 18°) 1035lm(@13W 3000K 28°) 1024lm(@13W 3000K 36°) 677lm(@13W 3000K 50°)	E ON-OFF D 0-10V Dimming	N 13°	27 2700K	B Black S Specular	WT White BK Black
						1 18°	30 3000K		
						2 28°	35 3500K		
						3 36°	40 4000K		
						5 50°	50 5000K		
ADLN	3 3"	5 Rectangular Trim	LM13 COB 13W	935lm(@13W 3000K 18°) 1035lm(@13W 3000K 28°) 1024lm(@13W 3000K 36°) 677lm(@13W 3000K 50°)	N No Driver A DALI	N 13°	27 2700K	B Black S Specular	WT White BK Black
						1 18°	30 3000K		
						2 28°	35 3500K		
						3 36°	40 4000K		
						5 50°	50 5000K		
ADLN	3 3"	5 Rectangular Trim	LM13 COB 13W	935lm(@13W 3000K 18°) 1035lm(@13W 3000K 28°) 1024lm(@13W 3000K 36°) 677lm(@13W 3000K 50°)	N No Driver A DALI	1 18°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black
						2 28°			
						3 36°			
						5 50°			

Example : ADLN35-LM07E230SWT




Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADLN	4 4"	5 Rectangular Trim	LM08 COB 8W	375lm(@8W 3000K 8°)	E ON-OFF D 0-10V Dimming	S 8°	27 2700K	B Black S Specular	WT White BK Black
							30 3000K		
							35 3500K		
							40 4000K		
							50 5000K		
ADLN	4 4"	5 Rectangular Trim	LM13 COB 13W LM18 COB 18W LM25 COB 25W	969lm(@13W 3000K 13°) 1135lm(@13W 3000K 19°) 1327lm(@13W 3000K 28°) 1268lm(@13W 3000K 36°) 1237lm(@13W 3000K 50°) 1309lm(@18W 3000K 13°) 1533lm(@18W 3000K 19°) 1793lm(@18W 3000K 28°) 1714lm(@18W 3000K 36°) 1671lm(@18W 3000K 50°) 1716lm(@25W 3000K 13°) 2009lm(@25W 3000K 19°) 2351lm(@25W 3000K 28°) 2246lm(@25W 3000K 36°) 2190lm(@25W 3000K 50°)	E ON-OFF D 0-10V Dimming	N 13°	27 2700K	B Black S Specular	WT White BK Black
						1 19°	30 3000K		
						2 28°	35 3500K		
						3 36°	40 4000K		
						5 50°	50 5000K		
ADLN	4 4"	5 Rectangular Trim	LM25 COB 25W	1793lm(@18W 3000K 28°) 1714lm(@18W 3000K 36°) 1671lm(@18W 3000K 50°) 1716lm(@25W 3000K 13°) 2009lm(@25W 3000K 19°) 2351lm(@25W 3000K 28°) 2246lm(@25W 3000K 36°) 2190lm(@25W 3000K 50°)	N No Driver A DALI	N 13°	27 2700K	B Black S Specular	WT White BK Black
						1 19°	30 3000K		
						2 28°	35 3500K		
						3 36°	40 4000K		
						5 50°	50 5000K		
ADLN	4 4"	5 Rectangular Trim	LM25 COB 25 W	1672lm(@25W 3000K 18°) 1821lm(@25W 3000K 28°) 1502lm(@25W 3000K 36°) 1469lm(@25W 3000K 50°)	N No Driver A DALI	1 18°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black
						2 28°			
						3 36°			
						5 50°			

Example : ADLN45-LM13E230SWT

ADLN25


ADLN25-LM07E130SWT



0° Aiming Angle

D(M)	LUX	W	L
1	2919	0.3	0.3
2	730	0.6	0.6
3	324	0.8	0.8
4	182	1.1	1.1


ADLN25-LM07E230SWT



0° Aiming Angle

D(M)	LUX	W	L
1	2442	0.4	0.4
2	611	0.9	0.9
3	271	1.3	1.3
4	153	1.7	1.7

ADLN25-LM07E330SWT




0° Aiming Angle

D(M)	LUX	W	L
1	1183	0.7	0.7
2	296	1.3	1.3
3	131	2.0	2.0
4	74	2.6	2.6

ADLN35


ADLN35-LM13E130SWT



0° Aiming Angle

D(M)	LUX	W	L
1	6848	0.3	0.3
2	1712	0.7	0.7
3	761	1.0	1.0
4	428	1.3	1.3


ADLN35-LM13E230SWT



0° Aiming Angle

D(M)	LUX	W	L
1	4510	0.5	0.5
2	1128	1.0	1.0
3	501	1.4	1.4
4	282	1.9	1.9


ADLN35-LM13E330SWT



0° Aiming Angle

D(M)	LUX	W	L
1	2375	0.7	0.7
2	594	1.4	1.4
3	264	2.1	2.1
4	148	2.8	2.8

ADLN35-LM13E530SWT




0° Aiming Angle

D(M)	LUX	W	L
1	913	0.9	0.9
2	228	1.8	1.8
3	101	2.8	2.8
4	57	3.7	3.7

ADLN45


ADLN45-LM25E130SWT



0° Aiming Angle

D(M)	LUX	W	L
1	10294	0.4	0.4
2	2574	0.8	0.8
3	1144	1.1	1.1
4	643	1.5	1.5


ADLN45-LM25E230SWT



0° Aiming Angle

D(M)	LUX	W	L
1	9615	0.5	0.5
2	2404	1.0	1.0
3	1068	1.5	1.5
4	601	2.0	2.0


ADLN45-LM25E330SWT



0° Aiming Angle

D(M)	LUX	W	L
1	4821	0.7	0.7
2	1205	1.3	1.3
3	536	2.0	2.0
4	301	2.7	2.7

ADLN45-LM25E530SWT




0° Aiming Angle

D(M)	LUX	W	L
1	3263	0.9	0.9
2	816	1.7	1.7
3	363	2.6	2.6
4	204	3.5	3.5

Accessories

Lenses/Filters

Model	Beam Elongator (CLASS I) 	SOFT BEAM ALENS (CLASS I) 	FROSTED GLASS (CLASS I) 	Honeycomb (CLASS I) 
ADLN25	ALENS-08-BEL	ALENS-08-BSL	ALENS-08-FR	ALENS-08-HCL
ADLN35	ALENS-11-BEL	ALENS-11-BSL-ULTRA	ALENS-11-FR	ALENS-11-HCL-ULTRA
ADLN45	ALENS-16-BEL-C	ALENS-16-BEL-SW	/	ALENS-16-HCL-ULTRA

Note: Only one piece accessory allowed and need to order separately

ULTRA SQUARE TRIMLESS DOWNLIGHT-DIRECTIONAL



ADLN26

ADLN36


ADLN46

Specifications




- Body Material: Aluminum
- Optical System: Clear Lens included+Reflector
- Finish: Environmentally safe powder coat
- Adjustable Angle: 0°-360° horizontal rotation and 0°-30° vertical aiming tilt
- Wiring: Please refer to wiring schematic diagram at the end of catalog
- Cutout: □ 55*55mm / □ 78*72mm / □ 105*105 mm
- Ceiling Thickness: 5mm-15mm / 5mm-25mm / 5mm-25mm
- Cut Off Angle: 35°
- LED Type: COB
- LED Wattage, CCT, Lumen Output:
 - ADLN26 3000K:624lm 5W / 780lm 7W
 - ADLN36 3000K:720lm 8W / 800lm 7W / 1080lm 10W / 1495lm 13W
 - ADLN46 3000K:720lm 8W / 1645lm 13W / 2220lm 18W / 2960lm 25W
- LED Lifetime: >50,000h-L70 / B10-Ta25°C (LM-80/TM-21)
- LED Color Consistency: 3 SDCM
- Net Weight: 0.15Kg / 0.45Kg / 0.8Kg

Product Features/Optics

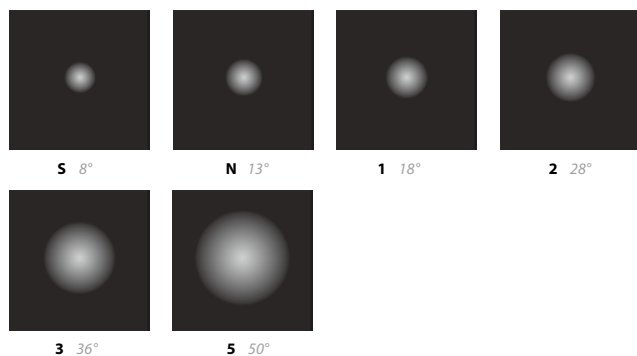


Both Honeycomb and Clear Lenses are interchangeable

Product Parameters




Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADLN	2 2"	6 Rectangular Trimless	LM05 COB 5W LM07 COB 7W	316lm(@7W 3000K 15°) 526lm(@7W 3000K 24°) 509lm(@7W 3000K 36°)	E ON-OFF D 0-10V Dimming	1 15° 2 24° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLN	2 2"	6 Rectangular Trimless	LM07 COB 7W	316lm(@7W 3000K 15°) 526lm(@7W 3000K 24°) 509lm(@7W 3000K 36°)	N No Driver A DALI	1 15° 2 24° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLN	2 2"	6 Rectangular Trimless	LM07 COB 7W	395lm(@7W 3000K 24°) 380lm(@7W 3000K 36°) 348lm(@7W 3000K 50°)	N No Driver A DALI	2 24° 3 36° 5 50°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black

Example : ADLN26-LM07E230SWT



Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADLN	3 3"	6 Rectangular Trimless	LM08 COB 8W	375lm(@8W 3000K 8°)	E ON-OFF D 0-10V Dimming	S 8°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLN	3 3"	6 Rectangular Trimless	LM07 COB 7W LM10 COB10W LM13 COB13W	533lm(@7W 3000K 13°) 585lm(@7W 3000K 18°) 641lm(@7W 3000K 28°) 643lm(@7W 3000K 36°) 425lm(@7W 3000K 50°) 643lm(@10W 3000K 13°) 714lm(@10W 3000K 18°) 790lm(@10W 3000K 28°) 804lm(@10W 3000K 36°) 532lm(@10W 3000K 50°) 820lm(@13W 3000K 13°) 935lm(@13W 3000K 18°) 1035lm(@13W 3000K 28°) 1024lm(@13W 3000K 36°) 677lm(@13W 3000K 50°)	E ON-OFF D 0-10V Dimming	N 13° 1 18° 2 28° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLN	3 3"	6 Rectangular Trimless	LM13 COB 13W	935lm(@13W 3000K 18°) 1035lm(@13W 3000K 28°) 1024lm(@13W 3000K 36°) 677lm(@13W 3000K 50°)	N No Driver A DALI	N 13° 1 18° 2 28° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLN	3 3"	6 Rectangular Trimless	LM13 COB 13W	935lm(@13W 3000K 18°) 1035lm(@13W 3000K 28°) 1024lm(@13W 3000K 36°) 677lm(@13W 3000K 50°)	N No Driver A DALI	1 18° 2 28° 3 36° 5 50°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black


Example : ADLN36-LM07E230SWT



Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADLN	4 4"	6 Rectangular Trimless	LM08 COB 8W	375lm(@8W 3000K 8°)	E ON-OFF D 0-10V Dimming	S 8°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLN	4 4"	6 Rectangular Trimless	LM13 COB 13W LM18 COB 18W LM25 COB 25W	969lm(@13W 3000K 13°) 1135lm(@13W 3000K 19°) 1327lm(@13W 3000K 28°) 1268lm(@13W 3000K 36°) 1237lm(@13W 3000K 50°) 1309lm(@18W 3000K 13°) 1533lm(@18W 3000K 19°) 1793lm(@18W 3000K 28°) 1714lm(@18W 3000K 36°) 1671lm(@18W 3000K 50°) 1716lm(@25W 3000K 13°) 2009lm(@25W 3000K 19°) 2351lm(@25W 3000K 28°) 2246lm(@25W 3000K 36°) 2190lm(@25W 3000K 50°)	E ON-OFF D 0-10V Dimming	N 13° 1 19° 2 28° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLN	4 4"	6 Rectangular Trimless	LM25 COB 25W	1793lm(@18W 3000K 28°) 1714lm(@18W 3000K 36°) 1671lm(@18W 3000K 50°) 1716lm(@25W 3000K 13°) 2009lm(@25W 3000K 19°) 2351lm(@25W 3000K 28°) 2246lm(@25W 3000K 36°) 2190lm(@25W 3000K 50°)	N No Driver A DALI	N 13° 1 19° 2 28° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLN	4 4"	6 Rectangular Trimless	LM25 COB 25 W	1672lm(@25W 3000K 18°) 1821lm(@25W 3000K 28°) 1502lm(@25W 3000K 36°) 1469lm(@25W 3000K 50°)	N No Driver A DALI	1 18° 2 28° 3 36° 5 50°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black

Example : ADLN46-LM13E230SWT


ADLN26



ADLN26-LM07E130SWT

0° Aiming Angle


D(M)	LUX	W	L
1	2919	0.3	0.3
2	730	0.6	0.6
3	324	0.8	0.8
4	182	1.1	1.1



ADLN26-LM07E230SWT

0° Aiming Angle

D(M)	LUX	W	L
1	2442	0.4	0.4
2	611	0.9	0.9
3	271	1.3	1.3
4	153	1.7	1.7




ADLN26-LM07E330SWT

0° Aiming Angle

D(M)	LUX	W	L
1	1183	0.7	0.7
2	296	1.3	1.3
3	131	2.0	2.0
4	74	2.6	2.6


ADLN36



ADLN36-LM13E130SWT

0° Aiming Angle


D(M)	LUX	W	L
1	6848	0.3	0.3
2	1712	0.7	0.7
3	761	1.0	1.0
4	428	1.3	1.3



ADLN36-LM13E230SWT

0° Aiming Angle


D(M)	LUX	W	L
1	4510	0.5	0.5
2	1128	1.0	1.0
3	501	1.4	1.4
4	282	1.9	1.9



ADLN36-LM13E330SWT

0° Aiming Angle

D(M)	LUX	W	L
1	2375	0.7	0.7
2	594	1.4	1.4
3	264	2.1	2.1
4	148	2.8	2.8




ADLN36-LM13E530SWT

0° Aiming Angle

D(M)	LUX	W	L
1	913	0.9	0.9
2	228	1.8	1.8
3	101	2.8	2.8
4	57	3.7	3.7


ADLN46



ADLN46-LM25E-130SWT

0° Aiming Angle


D(M)	LUX	W	L
1	10294	0.4	0.4
2	2574	0.8	0.8
3	1144	1.1	1.1
4	643	1.5	1.5



ADLN46-LM25E-230SWT

0° Aiming Angle


D(M)	LUX	W	L
1	9615	0.5	0.5
2	2404	1.0	1.0
3	1068	1.5	1.5
4	601	2.0	2.0



ADLN46-LM25E-330SWT

0° Aiming Angle

D(M)	LUX	W	L
1	4821	0.7	0.7
2	1205	1.3	1.3
3	536	2.0	2.0
4	301	2.7	2.7




ADLN46-LM25E-530SWT

0° Aiming Angle

D(M)	LUX	W	L
1	3263	0.9	0.9
2	816	1.7	1.7
3	363	2.6	2.6
4	204	3.5	3.5

Accessories

Lenses/Filters

Model	Beam Elongator (CLASS I) 	SOFT BEAM ALENS (CLASS I) 	FROSTED GLASS (CLASS I) 	Honeycomb (CLASS I) 
ADLN26	ALENS-08-BEL	ALENS-08-BSL	ALENS-08-FR	ALENS-08-HCL
ADLN36	ALENS-11-BEL	ALENS-11-BSL-ULTRA	ALENS-11-FR	ALENS-11-HCL-ULTRA
ADLN46	ALENS-16-BEL-C	ALENS-16-BEL-SW	/	ALENS-16-HCL-ULTRA

Note: Only one piece accessory allowed and need to order separately

ULTRA MULTIPLES SQUARE TRIM DOWNLIGHT-DIRECTIONAL



AMTN25



AMTN35



AMTN45

Specifications



IP20



High CRI



DALI



CCT Tunable

- Body Material: Aluminum
- Optical System: Clear Lens included+Reflector
- Finish: Environmentally safe powder coat
- Adjustable Angle: 0°-360° horizontal rotation and 0°-30° vertical aiming tilt
- Wiring: Please refer to wiring schematic diagram at the end of catalog
- Cutout: □ 108*55mm / □ 152*75mm / □ 200*100 mm
- Ceiling Thickness: 5mm-15mm / 5mm-25mm / 5mm-25mm
- Cut Off Angle: 35°
- LED Type: COB
- LED Wattage, CCT, Lumen Output:
 - AMTN25 3000K:624lm 5W / 780lm 7W
 - AMTN35 3000K:720lm 8W / 800lm 7W / 1080lm 10W / 1495lm 13W
 - AMTN45 3000K:720lm 8W / 1645lm 13W / 2220lm 18W / 2960lm 25W
- LED Lifetime: >50,000h-L70 / B10-Ta25°C (LM-80/TM-21)
- LED Color Consistency: 3 SDCM
- Net Weight: 0.3Kg / 0.9Kg / 1.6Kg


Product Features/Optics




S 8°



N 13°



1 18°



2 28°



3 36°




5 50°




Both Honeycomb and Clear Lenses are interchangeable

Product Parameters




Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
AMTN	2 2"	5 Rectangular Trim	205 COB 2*5W 207 COB 2*7W	2*316lm(@2*7W 3000K 15°) 2*526lm(@2*7W 3000K 24°) 2*509lm(@2*7W 3000K 36°)	E ON-OFF D 0-10V Dimming	1 15° 2 24° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
AMTN	2 2"	5 Rectangular Trim	207 COB 2*7W	2*316lm(@2*7W 3000K 15°) 2*526lm(@2*7W 3000K 24°) 2*509lm(@2*7W 3000K 36°)	N No Driver A DALI	1 15° 2 24° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
AMTN	2 2"	5 Rectangular Trim	207 COB 2*7W	2*395lm(@7W 3000K 24°) 2*380lm(@7W 3000K 36°) 2*348lm(@7W 3000K 50°)	N No Driver A DALI	2 24° 3 36° 5 50°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black

Example : AMTN25-207E230SWT



Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
AMTN	3 3"	5 Rectangular Trim	208 COB 2*8W	2*375lm(@2*8W 3000K 8°)	E ON-OFF D 0-10V Dimming	S 8°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
AMTN	3 3"	5 Rectangular Trim	207 COB 2*7W 210 COB 2*10W 213 COB 2*13W	2*533lm(@2*7W 3000K 13°) 2*585lm(@2*7W 3000K 18°) 2*641lm(@2*7W 3000K 28°) 2*643lm(@2*7W 3000K 36°) 2*425lm(@2*7W 3000K 50°) 2*643lm(@2*10W 3000K 13°) 2*714lm(@2*10W 3000K 18°) 2*790lm(@2*10W 3000K 28°) 2*804lm(@2*10W 3000K 36°) 2*532lm(@2*10W 3000K 50°) 2*820lm(@2*13W 3000K 13°) 2*935lm(@2*13W 3000K 18°) 2*1035lm(@2*13W 3000K 28°) 2*1024lm(@2*13W 3000K 36°) 2*677lm(@2*13W 3000K 50°)	E ON-OFF D 0-10V Dimming	N 13° 1 18° 2 28° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
AMTN	3 3"	5 Rectangular Trim	213 COB 2*13W	2*820lm(@2*13W 3000K 13°) 2*935lm(@2*13W 3000K 18°) 2*1035lm(@2*13W 3000K 28°) 2*1024lm(@2*13W 3000K 36°) 2*677lm(@2*13W 3000K 50°)	N No Driver A DALI	N 13° 1 18° 2 28° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
AMTN	3 3"	5 Rectangular Trim	213 COB 2*13W	2*820lm(@2*13W 3000K 13°) 2*935lm(@2*13W 3000K 18°) 2*1035lm(@2*13W 3000K 28°) 2*1024lm(@2*13W 3000K 36°) 2*677lm(@2*13W 3000K 50°)	N No Driver A DALI	1 18° 2 28° 3 36° 5 50°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black


Example : AMTN35-207E230SWT



Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
AMTN	4 4"	5 Rectangular Trim	208 COB 2*8W	2*375lm(@2*8W 3000K 8°)	E ON-OFF D 0-10V Dimming	S 8°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
AMTN	4 4"	5 Rectangular Trim	213 COB 2*13W 218 COB 2*18W 225 COB 2*25W	2*969lm(@2*13W 3000K 13°) 2*1135lm(@2*13W 3000K 19°) 2*1327lm(@2*13W 3000K 28°) 2*1268lm(@2*13W 3000K 36°) 2*1237lm(@2*13W 3000K 50°) 2*1309lm(@2*18W 3000K 13°) 2*1533lm(@2*18W 3000K 19°) 2*1793lm(@2*18W 3000K 28°) 2*1714lm(@2*18W 3000K 36°) 2*1671lm(@2*18W 3000K 50°) 2*1716lm(@2*25W 3000K 13°) 2*2009lm(@2*25W 3000K 19°) 2*2351lm(@2*25W 3000K 28°) 2*2246lm(@2*25W 3000K 36°) 2*2190lm(@2*25W 3000K 50°)	E ON-OFF D 0-10V Dimming	N 13° 1 19° 2 28° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
AMTN	4 4"	5 Rectangular Trim	225 COB 2*25W	2*1672lm(@2*25W 3000K 18°) 2*1821lm(@2*25W 3000K 28°) 2*1502lm(@2*25W 3000K 36°) 2*1469lm(@2*25W 3000K 50°)	N No Driver A DALI	N 13° 1 19° 2 28° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
AMTN	4 4"	5 Rectangular Trim	225 COB 2*25W	2*1672lm(@2*25W 3000K 18°) 2*1821lm(@2*25W 3000K 28°) 2*1502lm(@2*25W 3000K 36°) 2*1469lm(@2*25W 3000K 50°)	N No Driver A DALI	1 18° 2 28° 3 36° 5 50°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black

Example : AMTN45-213E230SWT


AMTN25



AMTN25-LM07E130SWT

0° Aiming Angle


D(M)	LUX	W	L
1	2919	0.3	0.3
2	730	0.6	0.6
3	324	0.8	0.8
4	182	1.1	1.1



AMTN25-LM07E230SWT

0° Aiming Angle

D(M)	LUX	W	L
1	2442	0.4	0.4
2	611	0.9	0.9
3	271	1.3	1.3
4	153	1.7	1.7




AMTN25-LM07E330SWT

0° Aiming Angle

D(M)	LUX	W	L
1	1183	0.7	0.7
2	296	1.3	1.3
3	131	2.0	2.0
4	74	2.6	2.6


AMTN35



AMTN35-LM13E130SWT

0° Aiming Angle


D(M)	LUX	W	L
1	6848	0.3	0.3
2	1712	0.7	0.7
3	761	1.0	1.0
4	428	1.3	1.3



AMTN35-LM13E230SWT

0° Aiming Angle


D(M)	LUX	W	L
1	4510	0.5	0.5
2	1128	1.0	1.0
3	501	1.4	1.4
4	282	1.9	1.9



AMTN35-LM13E330SWT

0° Aiming Angle

D(M)	LUX	W	L
1	2375	0.7	0.7
2	594	1.4	1.4
3	264	2.1	2.1
4	148	2.8	2.8




AMTN35-LM13E530SWT

0° Aiming Angle

D(M)	LUX	W	L
1	913	0.9	0.9
2	228	1.8	1.8
3	101	2.8	2.8
4	57	3.7	3.7


AMTN45



AMTN45-LM25E130SWT

0° Aiming Angle


D(M)	LUX	W	L
1	10294	0.4	0.4
2	2574	0.8	0.8
3	1144	1.1	1.1
4	643	1.5	1.5



AMTN45-LM25E230SWT

0° Aiming Angle


D(M)	LUX	W	L
1	9615	0.5	0.5
2	2404	1.0	1.0
3	1068	1.5	1.5
4	601	2.0	2.0



AMTN45-LM25E330SWT

0° Aiming Angle

D(M)	LUX	W	L
1	4821	0.7	0.7
2	1205	1.3	1.3
3	536	2.0	2.0
4	301	2.7	2.7




AMTN45-LM25E530SWT

0° Aiming Angle

D(M)	LUX	W	L
1	3263	0.9	0.9
2	816	1.7	1.7
3	363	2.6	2.6
4	204	3.5	3.5

Accessories

Lenses/Filters

Model	Beam Elongator (CLASS I) 	SOFT BEAM ALENS (CLASS I) 	FROSTED GLASS (CLASS I) 	Honeycomb (CLASS I) 
AMTN25	ALENS-08-BEL	ALENS-08-BSL	ALENS-08-FR	ALENS-08-HCL
AMTN35	ALENS-11-BEL	ALENS-11-BSL-ULTRA	ALENS-11-FR	ALENS-11-HCL-ULTRA
AMTN45	ALENS-16-BEL-C	ALENS-16-BEL-SW	/	ALENS-16-HCL-ULTRA

Note; Only one piece accessory allowed and need to order separately

ULTRA MULTIPLES SQUARE TRIMLESS DOWNLIGHT-DIRECTIONAL




AMTN26

AMTN36


AMTN46

Specifications




- Body Material: Aluminum
- Optical System: Clear Lens included+Reflector
- Finish: Environmentally safe powder coat
- Adjustable Angle: 0°-360° horizontal rotation and 0°-30° vertical aiming tilt
- Wiring: Please refer to wiring schematic diagram at the end of catalog
- Cutout: □ 115*55mm / □ 150*72mm / □ 205*100 mm
- Ceiling Thickness: 5mm-15mm / 5mm-25mm / 5mm-25mm
- Cut Off Angle: 35°
- LED Type: COB
- LED Wattage, CCT, Lumen Output:
 - AMTN26 3000K:624lm 5W / 780lm 7W
 - AMTN36 3000K:720lm 8W / 800lm 7W / 1080lm 10W / 1495lm 13W
 - AMTN46 3000K:720lm 8W / 1645lm 13W / 2220lm 18W / 2960lm 25W
- LED Lifetime: >50,000h-L70 / B10-Ta25°C (LM-80/TM-21)
- LED Color Consistency: 3 SDCM
- Net Weight: 0.15Kg / 0.45Kg / 0.8Kg

Product Features/Optics

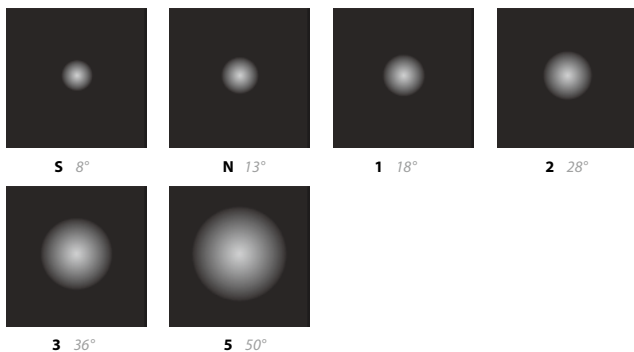


Both Honeycomb and Clear Lenses are interchangeable

Product Parameters




Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
AMTN	2 2"	6 Rectangular Trimless	205 COB 2*5W 207 COB 2*7W	2*316lm(@2*7W 3000K 15°) 2*526lm(@2*7W 3000K 24°) 2*509lm(@2*7W 3000K 36°)	E ON-OFF D 0-10V Dimming	1 15°	27 2700K	B Black S Specular	WT White BK Black
						2 24°	30 3000K		
						3 36°	35 3500K		
						4 40°	40 4000K		
						5 50°	50 5000K		
AMTN	2 2"	6 Rectangular Trimless	207 COB 2*7W	2*316lm(@2*7W 3000K 15°) 2*526lm(@2*7W 3000K 24°) 2*509lm(@2*7W 3000K 36°)	N No Driver A DALI	1 15°	27 2700K	B Black S Specular	WT White BK Black
						2 24°	30 3000K		
						3 36°	35 3500K		
						4 40°	40 4000K		
						5 50°	50 5000K		
AMTN	2 2"	6 Rectangular Trimless	207 COB 2*7W	2*395lm(@7W 3000K 24°) 2*380lm(@7W 3000K 36°) 2*348lm(@7W 3000K 50°)	N No Driver A DALI	2 24°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black
						3 36°			
						5 50°			

Example : AMTN26-207E230SWT



Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
AMTN	3 3"	6 Rectangular Trimless	208 COB 2*8W	2*375lm(@2*8W 3000K 8°)	E ON-OFF D 0-10V Dimming	S 8°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
AMTN	3 3"	6 Rectangular Trimless	207 COB 2*7W 210 COB 2*10W 213 COB 2*13W	2*533lm(@2*7W 3000K 13°) 2*585lm(@2*7W 3000K 18°) 2*641lm(@2*7W 3000K 28°) 2*643lm(@2*7W 3000K 36°) 2*425lm(@2*7W 3000K 50°) 2*643lm(@2*10W 3000K 13°) 2*714lm(@2*10W 3000K 18°) 2*790lm(@2*10W 3000K 28°) 2*804lm(@2*10W 3000K 36°) 2*532lm(@2*10W 3000K 50°) 2*820lm(@2*13W 3000K 13°) 2*935lm(@2*13W 3000K 18°) 2*1035lm(@2*13W 3000K 28°) 2*1024lm(@2*13W 3000K 36°) 2*677lm(@2*13W 3000K 50°)	E ON-OFF D 0-10V Dimming	N 13°	27 2700K	B Black S Specular	WT White BK Black
						1 18°	30 3000K		
						2 28°	35 3500K		
						3 36°	40 4000K		
						5 50°	50 5000K		
AMTN	3 3"	6 Rectangular Trimless	207 COB 2*7W 210 COB 2*10W 213 COB 2*13W	2*820lm(@2*13W 3000K 13°) 2*935lm(@2*13W 3000K 18°) 2*1035lm(@2*13W 3000K 28°) 2*1024lm(@2*13W 3000K 36°) 2*677lm(@2*13W 3000K 50°)	N No Driver A DALI	1 18°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black
						2 28°			
						3 36°			
						5 50°			


Example : AMTN36-207E230SWT



Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
AMTN	4 4"	6 Rectangular Trimless	208 COB 2*8W	2*375lm(@2*8W 3000K 8°)	E ON-OFF D 0-10V Dimming	S 8°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
AMTN	4 4"	6 Rectangular Trimless	213 COB 2*13W 218 COB 2*18W 225 COB 2*25W	2*969lm(@2*13W 3000K 13°) 2*1135lm(@2*13W 3000K 19°) 2*1327lm(@2*13W 3000K 28°) 2*1268lm(@2*13W 3000K 36°) 2*1237lm(@2*13W 3000K 50°) 2*1309lm(@2*18W 3000K 13°) 2*1533lm(@2*18W 3000K 19°) 2*1793lm(@2*18W 3000K 28°) 2*1714lm(@2*18W 3000K 36°) 2*1671lm(@2*18W 3000K 50°) 2*1716lm(@2*25W 3000K 13°) 2*2009lm(@2*25W 3000K 19°) 2*2351lm(@2*25W 3000K 28°) 2*2246lm(@2*25W 3000K 36°) 2*2190lm(@2*25W 3000K 50°)	E ON-OFF D 0-10V Dimming	N 13°	27 2700K	B Black S Specular	WT White BK Black
						1 19°	30 3000K		
						2 28°	35 3500K		
						3 36°	40 4000K		
						5 50°	50 5000K		
AMTN	4 4"	6 Rectangular Trimless	225 COB 2*25W	2*1793lm(@2*18W 3000K 28°) 2*1714lm(@2*18W 3000K 36°) 2*1671lm(@2*18W 3000K 50°) 2*1716lm(@2*25W 3000K 13°) 2*2009lm(@2*25W 3000K 19°) 2*2351lm(@2*25W 3000K 28°) 2*2246lm(@2*25W 3000K 36°) 2*2190lm(@2*25W 3000K 50°)	N No Driver A DALI	N 13°	27 2700K	B Black S Specular	WT White BK Black
						1 19°	30 3000K		
						2 28°	35 3500K		
						3 36°	40 4000K		
						5 50°	50 5000K		
AMTN	4 4"	6 Rectangular Trimless	225 COB 2*25W	2*1672lm(@2*25W 3000K 18°) 2*1821lm(@2*25W 3000K 28°) 2*1502lm(@2*25W 3000K 36°) 2*1469lm(@2*25W 3000K 50°)	N No Driver A DALI	1 18°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black
						2 28°			
						3 36°			
						5 50°			

Example : AMTN46-213E230SWT


AMTN26



AMTN26-LM07E130SWT

0° Aiming Angle


D(M)	LUX	W	L
1	2919	0.3	0.3
2	730	0.6	0.6
3	324	0.8	0.8
4	182	1.1	1.1



AMTN26-LM07E230SWT

0° Aiming Angle

D(M)	LUX	W	L
1	2442	0.4	0.4
2	611	0.9	0.9
3	271	1.3	1.3
4	153	1.7	1.7




AMTN26-LM07E330SWT

0° Aiming Angle

D(M)	LUX	W	L
1	1183	0.7	0.7
2	296	1.3	1.3
3	131	2.0	2.0
4	74	2.6	2.6


AMTN36



AMTN36-LM13E130SWT

0° Aiming Angle


D(M)	LUX	W	L
1	6848	0.3	0.3
2	1712	0.7	0.7
3	761	1.0	1.0
4	428	1.3	1.3



AMTN36-LM13E230SWT

0° Aiming Angle


D(M)	LUX	W	L
1	4510	0.5	0.5
2	1128	1.0	1.0
3	501	1.4	1.4
4	282	1.9	1.9



AMTN36-LM13E330SWT

0° Aiming Angle

D(M)	LUX	W	L
1	2375	0.7	0.7
2	594	1.4	1.4
3	264	2.1	2.1
4	148	2.8	2.8




AMTN36-LM13E530SWT

0° Aiming Angle

D(M)	LUX	W	L
1	913	0.9	0.9
2	228	1.8	1.8
3	101	2.8	2.8
4	57	3.7	3.7


AMTN46



AMTN46-LM25E130SWT

0° Aiming Angle


D(M)	LUX	W	L
1	10294	0.4	0.4
2	2574	0.8	0.8
3	1144	1.1	1.1
4	643	1.5	1.5



AMTN46-LM25E230SWT

0° Aiming Angle


D(M)	LUX	W	L
1	9615	0.5	0.5
2	2404	1.0	1.0
3	1068	1.5	1.5
4	601	2.0	2.0



AMTN46-LM25E330SWT

0° Aiming Angle

D(M)	LUX	W	L
1	4821	0.7	0.7
2	1205	1.3	1.3
3	536	2.0	2.0
4	301	2.7	2.7




AMTN46-LM25E530SWT

0° Aiming Angle

D(M)	LUX	W	L
1	3263	0.9	0.9
2	816	1.7	1.7
3	363	2.6	2.6
4	204	3.5	3.5

Accessories

Lenses/Filters

Model	Beam Elongator (CLASS I) 	SOFT BEAM ALENS (CLASS I) 	FROSTED GLASS (CLASS I) 	Honeycomb (CLASS I) 
AMTN26	ALENS-08-BEL	ALENS-08-BSL	ALENS-08-FR	ALENS-08-HCL
AMTN36	ALENS-11-BEL	ALENS-11-BSL-ULTRA	ALENS-11-FR	ALENS-11-HCL-ULTRA
AMTN46	ALENS-16-BEL-C	ALENS-16-BEL-SW	/	ALENS-16-HCL-ULTRA

Note: Only one piece accessory allowed and need to order separately

ULTRA MICRO AND ANTI-FOG



ADLN33



ADLN34



ADLN37



ADLN38

Specifications




- Body Material: Aluminum
- Optical System: Clear Lens included+Reflector
- Finish: Environmentally safe powder coat
- Adjustable Angle: 0°-360° horizontal rotation
- Wiring: Please refer to wiring schematic diagram at the end of catalog
- Cutout: Ø100mm / Ø82mm / □ 79*79mm / □ 78*72mm
- Ceiling Thickness: 5mm-25mm
- Cut Off Angle: 35°
- LED Type: COB
- LED Wattage, CCT, Lumen Output:
3000K 800lm 7W / 1080lm 10W / 1495lm 13W
- LED Lifetime: >50,000h-L70 / B10-Ta25°C (LM-80/TM-21)
- LED Color Consistency: 3 SDCM
- Net Weight: 0.3Kg / 0.35Kg / 0.35Kg / 0.4Kg


Product Features/Optics



N 13°



1 18°



2 28°




3 36°




5 50°

Product Parameters




Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADLN	3	3"	3 Round Trim (IP44 Aperture)	LM07 COB 7W LM10 COB10W LM13 COB13W	E ON-OFF D 0-10V Dimming	N 13° 1 18° 2 28° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLN	3	3"	3 Round Trim (IP44 Aperture)	LM13 COB 13W	N No Driver	N 13° 1 18° 2 28° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLN	3	3"	3 Round Trim (IP44 Aperture)	LM13 COB 13W	A DALI N No Driver	1 18° 2 28° 3 36° 5 50°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black

Example : ADLN33-LM07E230SWT




Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADLN	3	3"	4 Round Trimless (IP44 Aperture)	LM07 COB 7W LM10 COB10W LM13 COB13W	E ON-OFF D 0-10V Dimming	N 13° 1 18° 2 28° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLN	3	3"	4 Round Trimless (IP44 Aperture)	LM13 COB 13W	N No Driver	N 13° 1 18° 2 28° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLN	3	3"	4 Round Trimless (IP44 Aperture)	LM13 COB 13W	A DALI N No Driver	1 18° 2 28° 3 36° 5 50°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black

Example : ADLN34-LM07E230SWT



Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADLN	3	3"	7 Rectangular Trim (IP44 Aperture)	LM07 COB 7W LM10 COB10W LM13 COB13W	E ON-OFF D 0-10V Dimming	N 13° 1 18° 2 28° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLN	3	3"	7 Rectangular Trim (IP44 Aperture)	LM13 COB 13W	N No Driver	N 13° 1 18° 2 28° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLN	3	3"	7 Rectangular Trim (IP44 Aperture)	LM13 COB 13W	A DALI N No Driver	1 18° 2 28° 3 36° 5 50°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black


Example : ADLN37-LM07E230SWT



Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADLN	3	3"	8 Rectangular Trimless (IP44 Aperture)	LM07 COB 7W LM10 COB10W LM13 COB13W	E ON-OFF D 0-10V Dimming	N 13° 1 18° 2 28° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLN	3	3"	8 Rectangular Trimless (IP44 Aperture)	LM13 COB 13W	N No Driver	N 13° 1 18° 2 28° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular	WT White BK Black
ADLN	3	3"	8 Rectangular Trimless (IP44 Aperture)	LM13 COB 13W	A DALI N No Driver	1 18° 2 28° 3 36° 5 50°	CC 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black

Example : ADLN38-LM07E230SWT


ADLN33



ADLN33-LM13E130SWT

0° Aiming Angle


D(M)	LUX	W	L
1	6848	0.3	0.3
2	1712	0.7	0.7
3	761	1.0	1.0
4	428	1.3	1.3



ADLN33-LM13E230SWT

0° Aiming Angle


D(M)	LUX	W	L
1	4510	0.5	0.5
2	1128	1.0	1.0
3	501	1.4	1.4
4	282	1.9	1.9



ADLN33-LM13E330SWT

0° Aiming Angle

D(M)	LUX	W	L
1	2375	0.7	0.7
2	594	1.4	1.4
3	264	2.1	2.1
4	148	2.8	2.8




ADLN33-LM13E530SWT

0° Aiming Angle

D(M)	LUX	W	L
1	913	0.9	0.9
2	228	1.8	1.8
3	101	2.8	2.8
4	57	3.7	3.7


ADLN34



ADLN34-LM13E130SWT

0° Aiming Angle


D(M)	LUX	W	L
1	6848	0.3	0.3
2	1712	0.7	0.7
3	761	1.0	1.0
4	428	1.3	1.3



ADLN34-LM13E230SWT

0° Aiming Angle


D(M)	LUX	W	L
1	4510	0.5	0.5
2	1128	1.0	1.0
3	501	1.4	1.4
4	282	1.9	1.9



ADLN34-LM13E330SWT

0° Aiming Angle

D(M)	LUX	W	L
1	2375	0.7	0.7
2	594	1.4	1.4
3	264	2.1	2.1
4	148	2.8	2.8




ADLN34-LM13E530SWT

0° Aiming Angle

D(M)	LUX	W	L
1	913	0.9	0.9
2	228	1.8	1.8
3	101	2.8	2.8
4	57	3.7	3.7


ADLN37



ADLN37-LM13E130SWT

0° Aiming Angle


D(M)	LUX	W	L
1	6848	0.3	0.3
2	1712	0.7	0.7
3	761	1.0	1.0
4	428	1.3	1.3



ADLN37-LM13E230SWT

0° Aiming Angle


D(M)	LUX	W	L
1	4510	0.5	0.5
2	1128	1.0	1.0
3	501	1.4	1.4
4	282	1.9	1.9



ADLN37-LM13E330SWT

0° Aiming Angle

D(M)	LUX	W	L
1	2375	0.7	0.7
2	594	1.4	1.4
3	264	2.1	2.1
4	148	2.8	2.8







ADLN37-LM13E530SWT

0° Aiming Angle

D(M)	LUX	W	L
1	913	0.9	0.9
2	228	1.8	1.8
3	101	2.8	2.8
4	57	3.7	3.7


Light Distribution

ADLN38

	ADLN38-LM13E130SWT			
	0° Aiming Angle			
	D(M)	LUX	W	L
	1	6848	0.3	0.3
	2	1712	0.7	0.7
	ADLN38-LM13E230SWT			
	0° Aiming Angle			
	D(M)	LUX	W	L
	1	4510	0.5	0.5
	2	1128	1.0	1.0
	ADLN38-LM13E330SWT			
	0° Aiming Angle			
	D(M)	LUX	W	L
	1	2375	0.7	0.7
	2	594	1.4	1.4
	ADLN38-LM13E530SWT			
	0° Aiming Angle			
	D(M)	LUX	W	L
	1	913	0.9	0.9
	2	228	1.8	1.8

Accessories

Lenses/Filters

Model	Honeycomb (CLASS I) 
ADLN33/ADLN34/ADLN37/ADLN38	ALENS-12-HCL-ULTRA

Note; Only one piесе accessory allowed and need to order separately

ULTRA MICRO AND ANTI-FOG



ADLN43



ADLN44



ADLN47




ADLN48

Specifications



- Body Material: Aluminum
- Optical System: Clear Lens included+Reflector
- Finish: Environmentally safe powder coat
- Adjustable Angle: 0°-360° horizontal rotation
- Wiring: Please refer to wiring schematic diagram at the end of catalog
- Cutout: Ø100mm / Ø105mm / □ 115*115mm / □ 105*105mm
- Ceiling Thickness: 5mm-25mm
- Cut Off Angle: 35°
- LED Type: COB
- LED Wattage, CCT, Lumen Output:
3000K 720lm 8W / 1645lm 13W / 2220lm 18W / 2960lm 25W
- LED Lifetime: >50,000h-L70 / B10-Ta25°C (LM-80/TM-21)
- LED Color Consistency: 3 SDCM
- Net Weight: 0.5Kg / 0.5Kg / 0.5Kg / 0.5Kg

Product Features/Optics

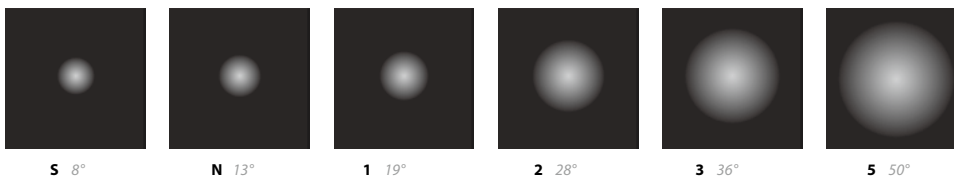

S 8°

N 13°


1 19°

2 28°

3 36°


5 50°

Product Parameters




Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADLN	4 4"	3 Round Trim (IP44 Aperture)	LM08 COB 8W	375lm(@8W 3000K 8°)	E ON-OFF D 0-10V Dimming	S 8°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular W White	WT White BK Black
ADLN	4 4"	3 Round Trim (IP44 Aperture)	LM13 COB 13W LM18 COB 18W LM25 COB 25W	969lm(@13W 3000K 13°) 1135lm(@13W 3000K 19°) 61327lm(@13W 3000K 28°) 1268lm(@13W 3000K 36°) 1237lm(@13W 3000K 50°) 1309lm(@18W 3000K 13°) 1533lm(@18W 3000K 18°) 1793lm(@18W 3000K 28°)	E ON-OFF D 0-10V Dimming	N 13° 1 19° 2 28° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular W White	WT White BK Black
ADLN	4 4"	3 Round Trim (IP44 Aperture)	LM25 COB 25W	1714lm(@18W 3000K 28°) 1714lm(@18W 3000K 36°) 1671lm(@18W 3000K 50°) 1716lm(@25W 3000K 13°) 2009lm(@25W 3000K 18°) 2351lm(@25W 3000K 28°) 2246lm(@25W 3000K 36°) 2190lm(@25W 3000K 50°)	A DALI N No Driver	N 13° 1 19° 2 28° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular W White	WT White BK Black

Example : ADLN43-LM18E230SWT



Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADLN	4 4"	4 Round Trimless (IP44 Aperture)	LM08 COB 8W	375lm(@8W 3000K 8°)	E ON-OFF D 0-10V Dimming	S 8°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular W White	WT White BK Black
ADLN	4 4"	4 Round Trimless (IP44 Aperture)	LM13 COB 13W LM18 COB 18W LM25 COB 25W	969lm(@13W 3000K 13°) 1135lm(@13W 3000K 19°) 61327lm(@13W 3000K 28°) 1268lm(@13W 3000K 36°) 1237lm(@13W 3000K 50°) 1309lm(@18W 3000K 13°) 1533lm(@18W 3000K 18°) 1793lm(@18W 3000K 28°)	E ON-OFF D 0-10V Dimming	N 13° 1 19° 2 28° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular W White	WT White BK Black
ADLN	4 4"	4 Round Trimless (IP44 Aperture)	LM25 COB 25W	1714lm(@18W 3000K 28°) 1714lm(@18W 3000K 36°) 1671lm(@18W 3000K 50°) 1716lm(@25W 3000K 13°) 2009lm(@25W 3000K 18°) 2351lm(@25W 3000K 28°) 2246lm(@25W 3000K 36°) 2190lm(@25W 3000K 50°)	A DALI N No Driver	N 13° 1 19° 2 28° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular W White	WT White BK Black


Example : ADLN44-LM18E230SWT



Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
ADLN	4 4"	7 Rectangular Trim (IP44 Aperture)	LM08 COB 8W	375lm(@8W 3000K 8°)	E ON-OFF D 0-10V Dimming	S 8°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular W White	WT White BK Black
ADLN	4 4"	7 Rectangular Trim (IP44 Aperture)	LM13 COB 13W LM18 COB 18W LM25 COB 25W	969lm(@13W 3000K 13°) 1135lm(@13W 3000K 19°) 61327lm(@13W 3000K 28°) 1268lm(@13W 3000K 36°) 1237lm(@13W 3000K 50°) 1309lm(@18W 3000K 13°) 1533lm(@18W 3000K 18°) 1793lm(@18W 3000K 28°)	E ON-OFF D 0-10V Dimming	N 13° 1 19° 2 28° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular W White	WT White BK Black
ADLN	4 4"	7 Rectangular Trim (IP44 Aperture)	LM25 COB 25W	1714lm(@18W 3000K 28°) 1714lm(@18W 3000K 36°) 1671lm(@18W 3000K 50°) 1716lm(@25W 3000K 13°) 2009lm(@25W 3000K 18°) 2351lm(@25W 3000K 28°) 2246lm(@25W 3000K 36°) 2190lm(@25W 3000K 50°)	A DALI N No Driver	N 13° 1 19° 2 28° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular W White	WT White BK Black

Example : ADLN47-LM18E230SWT

Product Parameters




Model	Size	Trim	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish	
ADLN	4	4"	8 Rectangular Trim (IP44 Aperture)	LM08 COB 8W	375lm(@8W 3000K 8°)	E ON-OFF D 0-10V Dimming	S 8°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular W White	WT White BK Black
ADLN	4	4"	8 Rectangular Trim (IP44 Aperture)	LM13 COB 13W LM18 COB 18W LM25 COB 25W	969lm(@13W 3000K 13°) 1135lm(@13W 3000K 19°) 61327lm(@13W 3000K 28°) 1268lm(@13W 3000K 36°) 1237lm(@13W 3000K 50°) 1309lm(@18W 3000K 13°) 1533lm(@18W 3000K 18°)	E ON-OFF D 0-10V Dimming	N 13° 1 19° 2 28° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular W White	WT White BK Black
ADLN	4	4"	8 Rectangular Trim (IP44 Aperture)	LM25 COB 25W	1793lm(@18W 3000K 28°) 1714lm(@18W 3000K 36°) 1671lm(@18W 3000K 50°) 1716lm(@25W 3000K 13°) 2009lm(@25W 3000K 18°) 2351lm(@25W 3000K 28°) 2246lm(@25W 3000K 36°) 2190lm(@25W 3000K 50°)	A DALI N No Driver	N 13° 1 19° 2 28° 3 36° 5 50°	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	B Black S Specular W White	WT White BK Black

Example : ADLN48-LM18E230SWT

Light Distribution

ADLN43


ADLN43-LM25E130SWT



0° Aiming Angle

D(M)	LUX	W	L
1	10294	0.4	0.4
2	2574	0.8	0.8
3	1144	1.1	1.1
4	643	1.5	1.5


ADLN43-LM25E230SWT



0° Aiming Angle

D(M)	LUX	W	L
1	9615	0.5	0.5
2	2404	1.0	1.0
3	1068	1.5	1.5
4	601	2.0	2.0


ADLN43-LM25E330SWT



0° Aiming Angle

D(M)	LUX	W	L
1	4821	0.7	0.7
2	1205	1.3	1.3
3	536	2.0	2.0
4	301	2.7	2.7

ADLN43-LM25E530SWT




0° Aiming Angle

D(M)	LUX	W	L
1	3263	0.9	0.9
2	816	1.7	1.7
3	363	2.6	2.6
4	204	3.5	3.5

ADLN44


ADLN44-LM25E130SWT



0° Aiming Angle

D(M)	LUX	W	L
1	10294	0.4	0.4
2	2574	0.8	0.8
3	1144	1.1	1.1
4	643	1.5	1.5


ADLN44-LM25E230SWT



0° Aiming Angle

D(M)	LUX	W	L
1	9615	0.5	0.5
2	2404	1.0	1.0
3	1068	1.5	1.5
4	601	2.0	2.0


ADLN44-LM25E330SWT



0° Aiming Angle

D(M)	LUX	W	L
1	4821	0.7	0.7
2	1205	1.3	1.3
3	536	2.0	2.0
4	301	2.7	2.7

ADLN44-LM25E530SWT




0° Aiming Angle

D(M)	LUX	W	L
1	3263	0.9	0.9
2	816	1.7	1.7
3	363	2.6	2.6
4	204	3.5	3.5

Light Distribution


ADLN47



ADLN47-LM25E130SWT

0° Aiming Angle


D(M)	LUX	W	L
1	10294	0.4	0.4
2	2574	0.8	0.8
3	1144	1.1	1.1
4	643	1.5	1.5



ADLN47-LM25E230SWT

0° Aiming Angle


D(M)	LUX	W	L
1	9615	0.5	0.5
2	2404	1.0	1.0
3	1068	1.5	1.5
4	601	2.0	2.0



ADLN47-LM25E330SWT

0° Aiming Angle

D(M)	LUX	W	L
1	4821	0.7	0.7
2	1205	1.3	1.3
3	536	2.0	2.0
4	301	2.7	2.7




ADLN47-LM25E530SWT

0° Aiming Angle

D(M)	LUX	W	L
1	3263	0.9	0.9
2	816	1.7	1.7
3	363	2.6	2.6
4	204	3.5	3.5


ADLN47



ADLN47-LM25E130SWT

0° Aiming Angle


D(M)	LUX	W	L
1	10294	0.4	0.4
2	2574	0.8	0.8
3	1144	1.1	1.1
4	643	1.5	1.5



ADLN47-LM25E230SWT

0° Aiming Angle


D(M)	LUX	W	L
1	9615	0.5	0.5
2	2404	1.0	1.0
3	1068	1.5	1.5
4	601	2.0	2.0



ADLN47-LM25E330SWT

0° Aiming Angle

D(M)	LUX	W	L
1	4821	0.7	0.7
2	1205	1.3	1.3
3	536	2.0	2.0
4	301	2.7	2.7




ADLN47-LM25E530SWT

0° Aiming Angle

D(M)	LUX	W	L
1	3263	0.9	0.9
2	816	1.7	1.7
3	363	2.6	2.6
4	204	3.5	3.5

Accessories

Lenses/Filters

Model	Honeycomb (CLASS I)
ADLN43/ADLN44/ADLN47/ADLN48	 ALENS-16-HCL-ULTRA

Note: Angles "S"/"N"/"I" come with Honeycomb at the factory, other angles need to be ordered separately

LINEAR LUMINAIRES



LIGNE PRO RECESSED


LIGNE PRO LARGE DOWNLIGHT TRIM
LIGNE PRO LARGE DOWNLIGHT TRIMLESS
LIGNE PRO LARGE DIRECTIONAL TRIM
LIGNE PRO LARGE DIRECTIONAL TRIMLESS
LIGNE PRO LARGE WALL WASHER TRIM
LIGNE PRO LARGE WALL WASHER TRIMLESS

128

129
133
137
141
145
149



The G Shenzhen, A Tribute Portfolio Hotel
Shenzhen, China



LIGNE PRO RECESSED



Patented WAC SUBROSA® technology for the ultimate visual experience

LIGNE PRO LARGE DOWNLIGHT TRIM



Specifications



- Body Material: Extruded aluminum
- Optical System: SUBROSA® Optical System
- Finish: Environmentally safe powder coat
- Wiring: Please refer to wiring schematic diagram at the end of catalog
- Cutout: □ 91mm / □ 167mm / □ 320mm / □ 469mm x 48mm
- Ceiling Thickness: 5mm-25mm
- Cut Off Angle: 40°
- LED Type: High Power LED
- LED Wattage, CCT, Lumen Output:
 - AOR165DT-06 3000K: 750lm 6W
 - AOR165DT-11 3000K: 1375lm 11W
 - AOR165DT-22 3000K: 2750lm 22W
 - AOR165DT-32 3000K: 4000lm 32W
- LED Lifetime: >50,000h-L70 / B10-Ta25°C (LM-80/TM-21)
- LED Color Consistency: 3 SDCM
- Net Weight: 0.32Kg / 0.52Kg / 0.92Kg / 1.3Kg

Product Features/Optics



1 16°

3 36°

4 46°




Black



Specular




Gold




Haze

Product Parameters




Model	Comment	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
AOR165	DT Downlight Trim	06 LED 06W	612lm(@6W 3000K 16°) 612lm(@6W 3000K 36°) 612lm(@6W 3000K 46°)	E ON-OFF D 0-10V Dimming	1 16° 3 36° 4 46°	27 2700K 30 3000K 35 3500K 40 4000K	B Black S Specular G Gold H Haze	WT White BK Black

Example: :AOR165DT-06E140BWT




Model	Comment	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
AOR165	DT Downlight Trim	11 LED 11W	1227lm(@11W 3000K 16°) 1231lm(@11W 3000K 36°) 1240lm(@11W 3000K 46°)	E ON-OFF D 0-10V Dimming	1 16° 3 36° 4 46°	27 2700K 30 3000K 35 3500K 40 4000K	B Black S Specular G Gold H Haze	WT White BK Black

Example: AOR165DT-11E140BWT



Model	Comment	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
AOR165	DT Downlight Trim	22 LED 22W	2418lm(@22W 3000K 16°) 2395lm(@22W 3000K 36°) 2414lm(@22W 3000K 46°)	E ON-OFF D 0-10V Dimming	1 16° 3 36° 4 46°	27 2700K 30 3000K 35 3500K 40 4000K	B Black S Specular G Gold H Haze	WT White BK Black

Example: AOR165DT-22E140BWT

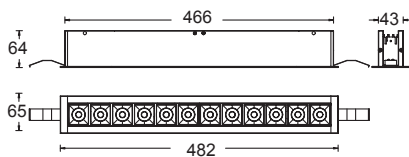


Model	Comment	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
AOR165	DT Downlight Trim	32 LED 32W	3706lm(@32W 3000K 16°) 3723lm(@32W 3000K 36°) 3737lm(@32W 3000K 46°)	E ON-OFF D 0-10V Dimming	1 16° 3 36° 4 46°	27 2700K 30 3000K 35 3500K 40 4000K	B Black S Specular G Gold H Haze	WT White BK Black

Example: AOR165DT-32E140BWT

AOR165DT-06


AOR165DT-06E140BWT



0° Aiming Angle

D(M)	LUX	W	L
1	2865	0.3	0.3
2	716	0.6	0.6
3	318	0.8	0.8
4	179	1.1	1.1


AOR165DT-06E340BWT



0° Aiming Angle

D(M)	LUX	W	L
1	1419	0.7	0.7
2	355	1.3	1.3
3	158	2.0	2.0
4	89	2.6	2.6

AOR165DT-06E440BWT




0° Aiming Angle

D(M)	LUX	W	L
1	1039	0.9	0.9
2	260	1.8	1.8
3	115	2.7	2.7
4	65	3.5	3.5

AOR165DT-11


AOR165DT-11E140BWT



0° Aiming Angle

D(M)	LUX	W	L
1	5950	0.3	0.3
2	1488	0.6	0.6
3	661	0.8	0.8
4	372	1.1	1.1


AOR165DT-11E340BWT



0° Aiming Angle

D(M)	LUX	W	L
1	2848	0.7	0.7
2	712	1.3	1.3
3	316	2.0	2.0
4	178	2.6	2.6

AOR165DT-11E440BWT




0° Aiming Angle

D(M)	LUX	W	L
1	2094	0.9	0.9
2	524	1.8	1.8
3	233	2.7	2.7
4	131	3.5	3.5

AOR165DT-22


AOR165DT-22E140BWT



0° Aiming Angle

D(M)	LUX	W	L
1	11825	0.3	0.3
2	2956	0.6	0.6
3	1314	0.8	0.8
4	739	1.1	1.1


AOR165DT-22E340BWT



0° Aiming Angle

D(M)	LUX	W	L
1	6016	0.7	0.7
2	1504	1.3	1.3
3	668	2.0	2.0
4	376	2.6	2.6


AOR165DT-22E440BWT



0° Aiming Angle

D(M)	LUX	W	L
1	4450	0.9	0.9
2	1113	1.8	1.8
3	494	2.7	2.7
4	278	3.5	3.5


AOR165DT-32



AOR165DT-32E140BWT

0° Aiming Angle


D(M)	LUX	W	L
1	16833	0.3	0.3
2	4208	0.6	0.6
3	1870	0.8	0.8
4	1052	1.1	1.1



AOR165DT-32E340BWT

0° Aiming Angle

D(M)	LUX	W	L
1	8520	0.7	0.7
2	2130	1.3	1.3
3	947	2.0	2.0
4	533	2.6	2.6



AOR165DT-32E440BWT

0° Aiming Angle

D(M)	LUX	W	L
1	6452	0.9	0.9
2	1613	1.8	1.8
3	717	2.7	2.7
4	403	3.5	3.5

LIGNE PRO LARGE DOWNLIGHT TRIMLESS



AOR140DL-06



AOR140DL-11



AOR140DL-22



AOR140DL-32


Specifications



SUBROSA®
Glare-free

- Body Material: Extruded aluminum
- Optical System: SUBROSA® Optical System
- Finish: Environmentally safe powder coat
- Wiring: Please refer to wiring schematic diagram at the end of catalog
- Cutout: □ 95mm / □ 171mm / □ 323mm / □ 473mm x 52mm
- Ceiling Thickness: 5mm-25mm
- Cut Off Angle: 40°
- LED Type: High Power LED
- LED Wattage, CCT, Lumen Output:
 - AOR140DL-06 3000K: 750lm 6W
 - AOR140DL-11 3000K: 1375lm 11W
 - AOR140DL-22 3000K: 2750lm 22W
 - AOR140DL-32 3000K: 4000lm 32W
- LED Lifetime: >50,000h-L70 / B10-Ta25°C (LM-80/TM-21)
- LED Color Consistency: 3 SDCM
- Net Weight: 0.22Kg / 0.38Kg / 0.72Kg / 1.04Kg

Product Features/Optics




1 16°



3 36°



4 46°




Black



Specular




Gold




Haze

Product Parameters




Model	Comment	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
AOR140	DL Downlight Trimless	06 LED 06W	612lm(@6W 3000K 16°) 612lm(@6W 3000K 36°) 612lm(@6W 3000K 46°)	E ON-OFF D 0-10V Dimming	1 16° 3 36° 4 46°	27 2700K 30 3000K 35 3500K 40 4000K	B Black S Specular G Gold H Haze	WT White BK Black

Example: AOR140DL-06E140BWT




Model	Comment	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
AOR140	DL Downlight Trimless	11 LED 11W	1227lm(@11W 3000K 16°) 1231lm(@11W 3000K 36°) 1240lm(@11W 3000K 46°)	E ON-OFF D 0-10V Dimming	1 16° 3 36° 4 46°	27 2700K 30 3000K 35 3500K 40 4000K	B Black S Specular G Gold H Haze	WT White BK Black

Example: AOR140DL-11E140BWT



Model	Comment	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
AOR140	DL Downlight Trimless	22 LED 22W	2418lm(@22W 3000K 16°) 2395lm(@22W 3000K 36°) 2414lm(@22W 3000K 46°)	E ON-OFF D 0-10V Dimming	1 16° 3 36° 4 46°	27 2700K 30 3000K 35 3500K 40 4000K	B Black S Specular G Gold H Haze	WT White BK Black

Example: AOR140DL-22E140BWT




Model	Comment	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
AOR140	DL Downlight Trimless	32 LED 32W	3706lm(@32W 3000K 16°) 3723lm(@32W 3000K 36°) 3737lm(@32W 3000K 46°)	E ON-OFF D 0-10V Dimming	1 16° 3 36° 4 46°	27 2700K 30 3000K 35 3500K 40 4000K	B Black S Specular G Gold H Haze	WT White BK Black

Example: AOR140DL-32E140BWT

AOR140DL-06


AOR140DL-06E140BWT



0° Aiming Angle

D(M)	LUX	W	L
1	2865	0.3	0.3
2	716	0.6	0.6
3	318	0.8	0.8
4	179	1.1	1.1


AOR140DL-06E340BWT



0° Aiming Angle

D(M)	LUX	W	L
1	1419	0.7	0.7
2	355	1.3	1.3
3	158	2.0	2.0
4	89	2.6	2.6

AOR140DL-06E440BWT




0° Aiming Angle

D(M)	LUX	W	L
1	1039	0.9	0.9
2	260	1.8	1.8
3	115	2.7	2.7
4	65	3.5	3.5

AOR140DL-11


AOR140DL-11E140BWT



0° Aiming Angle

D(M)	LUX	W	L
1	5950	0.3	0.3
2	1488	0.6	0.6
3	661	0.8	0.8
4	372	1.1	1.1


AOR140DL-11E340BWT



0° Aiming Angle

D(M)	LUX	W	L
1	2848	0.7	0.7
2	712	1.3	1.3
3	316	2.0	2.0
4	178	2.6	2.6

AOR140DL-11E440BWT




0° Aiming Angle

D(M)	LUX	W	L
1	2094	0.9	0.9
2	524	1.8	1.8
3	233	2.7	2.7
4	131	3.5	3.5

AOR140DL-22


AOR140DL-22E140BWT



0° Aiming Angle

D(M)	LUX	W	L
1	11825	0.3	0.3
2	2956	0.6	0.6
3	1314	0.8	0.8
4	739	1.1	1.1


AOR140DL-22E340BWT



0° Aiming Angle

D(M)	LUX	W	L
1	6016	0.7	0.7
2	1504	1.3	1.3
3	668	2.0	2.0
4	376	2.6	2.6

AOR140DL-22E440BWT




0° Aiming Angle

D(M)	LUX	W	L
1	4450	0.9	0.9
2	1113	1.8	1.8
3	494	2.7	2.7
4	278	3.5	3.5

Light Distribution

AOR140DL-32


AOR140DL-32E140BWT



0° Aiming Angle

D(M)	LUX	W	L
1	16833	0.3	0.3
2	4208	0.6	0.6
3	1870	0.8	0.8
4	1052	1.1	1.1


AOR140DL-32E340BWT



0° Aiming Angle

D(M)	LUX	W	L
1	8520	0.7	0.7
2	2130	1.3	1.3
3	947	2.0	2.0
4	533	2.6	2.6

AOR140DL-32E440BWT



0° Aiming Angle

D(M)	LUX	W	L
1	6452	0.9	0.9
2	1613	1.8	1.8
3	717	2.7	2.7
4	403	3.5	3.5

Accessories

Model	Description	Picture	Drawing
AOR140DL-RC002	2-head Embedded Parts		
AOR140DL-RC004	4-head Embedded Parts		
AOR140DL-RC008	8-head Embedded Parts		
AOR140DL-RC012	12-head Embedded Parts		

LIGNE PRO LARGE DIRECTIONAL TRIM



AOR175AT-06



AOR175AT-11




AOR175AT-22



AOR175AT-32

Specifications



- Body Material: Extruded aluminum
- Optical System: SUBROSA® Optical System
- Finish: Environmentally safe powder coat
- Adjustable Angle: +/-35° vertical aiming tile
- Wiring: Please refer to wiring schematic diagram at the end of catalog
- Cutout: □ 103mm / □ 180mm / □ 332mm / □ 486mmx59mm
- Ceiling Thickness: 5mm-25mm
- Cut Off Angle: 40°
- LED Type: High Power LED
- LED Wattage, CCT, Lumen Output:
 - AOR175AT-06 3000K: 750lm 6W
 - AOR175AT-11 3000K: 1375lm 11W
 - AOR175AT-22 3000K: 2750lm 22W
 - AOR175AT-32 3000K: 4000lm 32W
- LED Lifetime: >50,000h-L70 / B10-Ta25°C (LM-80/TM-21)
- LED Color Consistency: 3 SDCM
- Net Weight: 0.55Kg / 0.79Kg / 1.24Kg / 1.29Kg

Product Features/Optics



1 16°

3 36°

4 46°




Black



Specular




Gold




Haze

Product Parameters




Model	Comment	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
AOR175	AT Adjustable Trim	06 LED 06W	612lm(@6W 3000K 16°) 612lm(@6W 3000K 36°) 612lm(@6W 3000K 46°)	E ON-OFF D 0-10V Dimming	1 16° 3 36° 4 46°	27 2700K 30 3000K 35 3500K 40 4000K	B Black S Specular G Gold H Haze	WT White BK Black

Example: AOR175AT-06E140BWT




Model	Comment	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
AOR175	AT Adjustable Trim	11 LED 11W	1227lm(@11W 3000K 16°) 1231lm(@11W 3000K 36°) 1240lm(@11W 3000K 46°)	E ON-OFF D 0-10V Dimming	1 16° 3 36° 4 46°	27 2700K 30 3000K 35 3500K 40 4000K	B Black S Specular G Gold H Haze	WT White BK Black

Example: AOR175AT-11E140BWT



Model	Comment	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
AOR175	AT Adjustable Trim	22 LED 22W	2418lm(@22W 3000K 16°) 2395lm(@22W 3000K 36°) 2414lm(@22W 3000K 46°)	E ON-OFF D 0-10V Dimming	1 16° 3 36° 4 46°	27 2700K 30 3000K 35 3500K 40 4000K	B Black S Specular G Gold H Haze	WT White BK Black

Example: AOR175AT-22E140BWT




Model	Comment	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
AOR175	AT Adjustable Trim	32 LED 32W	3706lm(@32W 3000K 16°) 3723lm(@32W 3000K 36°) 3737lm(@32W 3000K 46°)	E ON-OFF D 0-10V Dimming	1 16° 3 36° 4 46°	27 2700K 30 3000K 35 3500K 40 4000K	B Black S Specular G Gold H Haze	WT White BK Black

Example: AOR175AT-32E140BWT

AOR175AT-06


AOR175AT-06E140BWT



0° Aiming Angle

D(M)	LUX	W	L
1	2865	0.3	0.3
2	716	0.6	0.6
3	318	0.8	0.8
4	179	1.1	1.1


AOR175AT-06E340BWT



0° Aiming Angle

D(M)	LUX	W	L
1	1419	0.7	0.7
2	355	1.3	1.3
3	158	2.0	2.0
4	89	2.6	2.6

AOR175AT-06E440BWT




0° Aiming Angle

D(M)	LUX	W	L
1	1039	0.9	0.9
2	260	1.8	1.8
3	115	2.7	2.7
4	65	3.5	3.5

AOR175AT-11


AOR175AT-11E140BWT



0° Aiming Angle

D(M)	LUX	W	L
1	5950	0.3	0.3
2	1488	0.6	0.6
3	661	0.8	0.8
4	372	1.1	1.1


AOR175AT-11E340BWT



0° Aiming Angle

D(M)	LUX	W	L
1	2848	0.7	0.7
2	712	1.3	1.3
3	316	2.0	2.0
4	178	2.6	2.6

AOR175AT-11E440BWT




0° Aiming Angle

D(M)	LUX	W	L
1	2094	0.9	0.9
2	524	1.8	1.8
3	233	2.7	2.7
4	131	3.5	3.5

AOR175AT-22


AOR175AT-22E140BWT



0° Aiming Angle

D(M)	LUX	W	L
1	11825	0.3	0.3
2	2956	0.6	0.6
3	1314	0.8	0.8
4	739	1.1	1.1


AOR175AT-22E340BWT



0° Aiming Angle

D(M)	LUX	W	L
1	6016	0.7	0.7
2	1504	1.3	1.3
3	668	2.0	2.0
4	376	2.6	2.6

AOR175AT-22E440BWT




0° Aiming Angle

D(M)	LUX	W	L
1	4450	0.9	0.9
2	1113	1.8	1.8
3	494	2.7	2.7
4	278	3.5	3.5

AOR175AT-32


AOR175AT-32E140BWT



0° Aiming Angle

D(M)	LUX	W	L
1	16833	0.3	0.3
2	4208	0.6	0.6
3	1870	0.8	0.8
4	1052	1.1	1.1


AOR175AT-32E340BWT



0° Aiming Angle

D(M)	LUX	W	L
1	8520	0.7	0.7
2	2130	1.3	1.3
3	947	2.0	2.0
4	533	2.6	2.6

AOR175AT-32E440BWT



0° Aiming Angle

D(M)	LUX	W	L
1	6452	0.9	0.9
2	1613	1.8	1.8
3	717	2.7	2.7
4	403	3.5	3.5

LIGNE PRO LARGE DIRECTIONAL TRIMLESS



AOR150AL-06



AOR150AL-11



AOR150AL-22



AOR150AL-32

Specifications



IP20




High CRI



SUBROSA®
Glare-free

- Body Material: Extruded aluminum
- Optical System: SUBROSA® Optical System
- Finish: Environmentally safe powder coat
- Adjustable Angle: +/-35° vertical aiming tile
- Wiring: Please refer to wiring schematic diagram at the end of catalog
- Cutout: □ 106mm / □ 183mm / □ 336mm / □ 490mm x 63mm
- Ceiling Thickness: 5mm-25mm
- Cut Off Angle: 40°
- LED Type: High Power LED
- LED Wattage, CCT, Lumen Output:
 - AOR150AL-06 3000K: 750lm 6W
 - AOR150AL-11 3000K: 1375lm 11W
 - AOR150AL-22 3000K: 2750lm 22W
 - AOR150AL-32 3000K: 4000lm 32W
- LED Lifetime: >50,000h-L70 / B10-Ta25°C (LM-80/TM-21)
- LED Color Consistency: 3 SDCM
- Net Weight: 0.43Kg / 0.58Kg / 0.92Kg / 1.23Kg

Product Features/Optics



1 16°



3 36°



4 46°




Black



Specular




Gold




Haze

Product Parameters




Model	Comment	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
AOR150	AL Adjustable Trimless	06 LED 06W	612lm(@6W 3000K 16°) 612lm(@6W 3000K 36°) 612lm(@6W 3000K 46°)	E ON-OFF D 0-10V Dimming	1 16° 3 36° 4 46°	27 2700K 30 3000K 35 3500K 40 4000K	B Black S Specular G Gold H Haze	WT White BK Black

Example: :AOR150AL-06E140BWT




Model	Comment	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
AOR150	AL Adjustable Trimless	11 LED 11W	1227lm(@11W 3000K 16°) 1231lm(@11W 3000K 36°) 1240lm(@11W 3000K 46°)	E ON-OFF D 0-10V Dimming	1 16° 3 36° 4 46°	27 2700K 30 3000K 35 3500K 40 4000K	B Black S Specular G Gold H Haze	WT White BK Black

Example: AOR150AL-11E140BWT



Model	Comment	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
AOR150	AL Adjustable Trimless	22 LED 22W	2418lm(@22W 3000K 16°) 2395lm(@22W 3000K 36°) 2414lm(@22W 3000K 46°)	E ON-OFF D 0-10V Dimming	1 16° 3 36° 4 46°	27 2700K 30 3000K 35 3500K 40 4000K	B Black S Specular G Gold H Haze	WT White BK Black

Example: AOR150AL-22E140BWT




Model	Comment	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
AOR150	AL Adjustable Trimless	32 LED 32W	3706lm(@32W 3000K 16°) 3723lm(@32W 3000K 36°) 3737lm(@32W 3000K 46°)	E ON-OFF D 0-10V Dimming	1 16° 3 36° 4 46°	27 2700K 30 3000K 35 3500K 40 4000K	B Black S Specular G Gold H Haze	WT White BK Black

Example: AOR150AL-32E140BWT


AOR150AL-06

AOR150AL-06E140BWT



0° Aiming Angle

D(M)	LUX	W	L
1	2865	0.3	0.3
2	716	0.6	0.6
3	318	0.8	0.8
4	179	1.1	1.1




AOR150AL-06E340BWT

0° Aiming Angle

D(M)	LUX	W	L
1	1419	0.7	0.7
2	355	1.3	1.3
3	158	2.0	2.0
4	89	2.6	2.6

AOR150AL-06E440BWT




0° Aiming Angle

D(M)	LUX	W	L
1	1039	0.9	0.9
2	260	1.8	1.8
3	115	2.7	2.7
4	65	3.5	3.5


AOR150AL-11

AOR150AL-11E140BWT



0° Aiming Angle

D(M)	LUX	W	L
1	5950	0.3	0.3
2	1488	0.6	0.6
3	661	0.8	0.8
4	372	1.1	1.1




AOR150AL-11E340BWT

0° Aiming Angle

D(M)	LUX	W	L
1	2848	0.7	0.7
2	712	1.3	1.3
3	316	2.0	2.0
4	178	2.6	2.6

AOR150AL-11E440BWT




0° Aiming Angle

D(M)	LUX	W	L
1	2094	0.9	0.9
2	524	1.8	1.8
3	233	2.7	2.7
4	131	3.5	3.5


AOR150AL-22

AOR150AL-22E140BWT



0° Aiming Angle

D(M)	LUX	W	L
1	11825	0.3	0.3
2	2956	0.6	0.6
3	1314	0.8	0.8
4	739	1.1	1.1




AOR150AL-22E340BWT

0° Aiming Angle

D(M)	LUX	W	L
1	6016	0.7	0.7
2	1504	1.3	1.3
3	668	2.0	2.0
4	376	2.6	2.6

AOR150AL-22E440BWT




0° Aiming Angle

D(M)	LUX	W	L
1	4450	0.9	0.9
2	1113	1.8	1.8
3	494	2.7	2.7
4	278	3.5	3.5

Light Distribution

AOR150AL-32


AOR150AL-32E140BWT



0° Aiming Angle

D(M)	LUX	W	L
1	16833	0.3	0.3
2	4208	0.6	0.6
3	1870	0.8	0.8
4	1052	1.1	1.1


AOR150AL-32E340BWT



0° Aiming Angle

D(M)	LUX	W	L
1	8520	0.7	0.7
2	2130	1.3	1.3
3	947	2.0	2.0
4	533	2.6	2.6

AOR150AL-32E440BWT



0° Aiming Angle

D(M)	LUX	W	L
1	6452	0.9	0.9
2	1613	1.8	1.8
3	717	2.7	2.7
4	403	3.5	3.5

Accessories

Model	Description	Picture	Drawing
AOR150AL-RC002	<i>2-head Embedded Parts</i>		
AOR150AL-RC004	<i>4-head Embedded Parts</i>		
AOR150AL-RC008	<i>8-head Embedded Parts</i>		
AOR150AL-RC012	<i>12-head Embedded Parts</i>		

LIGNE PRO LARGE WALL WASHER TRIM



AOR165WT-11



AOR165WT-22




AOR165WT-32

Specifications




- Body Material: Extruded aluminum
- Optical System: Clear Lens included
- Finish: Environmentally safe powder coat
- Wiring: Please refer to wiring schematic diagram at the end of catalog
- Cutout: □ 167mm / □ 320mm / □ 469mm x 48mm
- Ceiling Thickness: 5mm-25mm
- LED Type: High Power LED
- LED Wattage, CCT, Lumen Output:
 - AOR165WT-11 3000K: 1375lm 11W
 - AOR165WT-22 3000K: 2750lm 22W
 - AOR165WT-32 3000K: 4000lm 32W
- LED Lifetime: >50,000h-L70 / B10-Ta25°C (LM-80/TM-21)
- LED Color Consistency: 3 SDCM
- Net Weight: 0.51Kg / 0.92Kg / 1.3Kg

Product Features/Optics

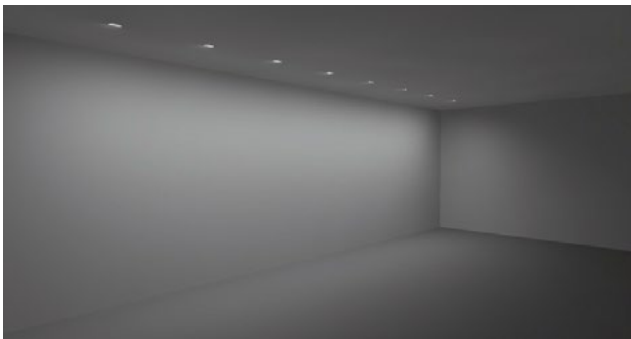


Lighting simulation with LIGNE PRO LARGE Wall Washer

Product Parameters



Model	Comment	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
AOR165	WT Wall Washer Trim	11 LED 11W	669lm(@11W 3000K)	E ON-OFF D 0-10V Dimming	W Wall Washer	27 2700K 30 3000K 35 3500K 40 4000K	B Black W White	WT White BK Black

Example: :AOR165WT-11EW40BWT



Model	Comment	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
AOR165	WT Wall Washer Trim	22 LED 22W	1467lm(@22W 3000K)	E ON-OFF D 0-10V Dimming	W Wall Washer	27 2700K 30 3000K 35 3500K 40 4000K	B Black W White	WT White BK Black

Example: AOR165WT-22EW40BWT



Model	Comment	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
AOR165	WT Wall Washer Trim	32 LED 32W	2300lm(@32W 3000K)	E ON-OFF D 0-10V Dimming	W Wall Washer	27 2700K 30 3000K 35 3500K 40 4000K	B Black W White	WT White BK Black

Example: AOR165WT-32EW40BWT


AOR165WT-11EW40BWT

Specifications:

Wall height (m): 3.0

Offset from wall (m): 0.6

Luminaire spacing (m): 0.6



H (m)	Surface illumination (lux)				
	below the luminaire	between the luminaire	below the luminaire	between the luminaire	below the luminaire
2.85	103	105	104	105	102
2.55	189	192	193	191	187
2.25	167	171	173	171	166
1.95	125	130	131	129	124
1.65	90	94	95	94	89
1.35	61	64	65	64	61
1.05	46	48	48	47	45
0.75	35	36	37	36	35
0.45	25	26	27	26	25
0.15	21	21	21	21	20

Specifications:

Wall height (m): 3.0

Offset from wall (m): 1

Luminaire spacing (m): 1

H (m)	Surface illumination (lux)				
	below the luminaire	between the luminaire	below the luminaire	between the luminaire	below the luminaire
2.85	29	29	29	29	28
2.55	53	55	54	54	53
2.25	70	71	71	70	69
1.95	69	70	70	70	68
1.65	61	62	63	62	60
1.35	50	51	52	51	49
1.05	42	43	44	43	41
0.75	35	36	36	36	34
0.45	27	29	29	28	27
0.15	23	24	24	24	23


AOR165WT-22EW40BWT

Specifications:

Wall height (m): 4.5

Offset from wall (m): 1

Luminaire spacing (m): 1



H (m)	Surface illumination (lux)				
	below the luminaire	between the luminaire	below the luminaire	between the luminaire	below the luminaire
4.275	79	81	80	81	79
3.825	141	144	144	144	141
3.375	140	142	144	142	139
2.925	112	115	116	115	112
2.475	84	87	89	87	84
2.025	62	65	66	65	62
1.575	48	50	51	50	48
1.125	38	39	40	39	38
0.675	29	30	31	30	29
0.225	25	25	26	25	24

Specifications:

Wall height (m): 4.5

Offset from wall (m): 1.5

Luminaire spacing (m): 1.5

H (m)	Surface illumination (lux)				
	below the luminaire	between the luminaire	below the luminaire	between the luminaire	below the luminaire
4.275	32	32	32	32	32
3.825	54	55	55	55	54
3.375	69	70	70	70	69
2.925	68	69	70	69	68
2.475	61	63	63	63	61
2.025	51	53	53	53	51
1.575	44	45	46	45	44
1.125	37	38	39	38	37
0.675	30	31	32	31	30
0.225	26	27	27	27	26


AOR165WT-32EW40BWT

Specifications :

Wall height (m): 6

Offset from wall (m): 1.5

Luminaire spacing (m): 1.5



H (m)	Surface illumination (lux)				
	below the luminaire	between the luminaire	below the luminaire	between the luminaire	below the luminaire
5.7	77	79	78	79	77
5.1	137	139	140	139	137
4.5	154	157	158	157	154
3.9	134	137	138	137	133
3.3	106	109	110	109	106
2.7	84	87	88	87	84
2.1	68	71	72	71	68
1.5	57	58	59	58	56
0.9	46	47	48	47	45
0.3	44	45	46	45	44

Specifications :

Wall height (m): 6

Offset from wall (m): 2

Luminaire spacing (m): 2

H (m)	Surface illumination (lux)				
	below the luminaire	between the luminaire	below the luminaire	between the luminaire	below the luminaire
5.7	47	47	47	47	47
5.1	74	73	73	73	74
4.5	95	95	95	95	95
3.9	96	96	97	96	96
3.3	87	88	89	88	87
2.7	74	75	76	75	74
2.1	65	66	66	66	64
1.5	56	57	58	57	56
0.9	46	47	48	47	46
0.3	45	46	47	46	45

LIGNE PRO LARGE WALL WASHER TRIMLESS



AOR140WL-11



AOR140WL-22




AOR140WL-32

Specifications




- Body Material: Extruded aluminum
- Optical System: Clear Lens included
- Finish: Environmentally safe powder coat
- Wiring: Please refer to wiring schematic diagram at the end of catalog
- Cutout: □ 171mm / □ 323mm / □ 473mm x 52mm
- Ceiling Thickness: 5mm-25mm
- LED Type: High Power LED
- LED Wattage, CCT, Lumen Output:
 - AOR140WL-11 3000K: 1375lm 11W
 - AOR140WL-22 3000K: 2750lm 22W
 - AOR140WL-32 3000K: 4000lm 32W
- LED Lifetime: >50,000h-L70 / B10-Ta25°C (LM-80/TM-21)
- LED Color Consistency: 3 SDCM
- Net Weight: 0.4Kg / 0.72Kg / 1.05Kg

Product Features/Optics

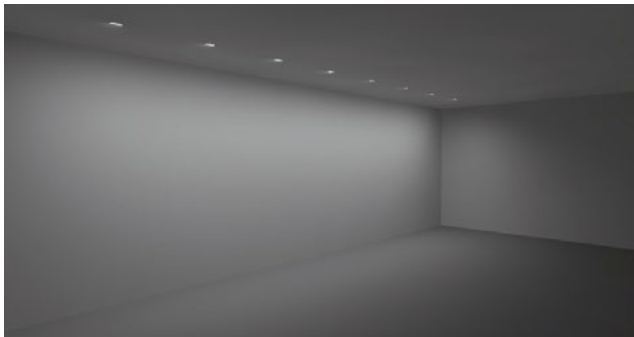

Lighting simulation with LIGNE PRO LARGE Wall Washer

Product Parameters



Model	Comment	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
AOR140	WL Wall Washer Trimless	11 LED 11W	669lm(@11W 3000K)	E ON-OFF D 0-10V Dimming	W Wall Washer	27 2700K 30 3000K 35 3500K 40 4000K	B Black W White	WT White BK Black

Example: :AOR140WL-11EW40BWT



Model	Comment	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
AOR140	WL Wall Washer Trimless	22 LED 22W	1467lm(@22W 3000K)	E ON-OFF D 0-10V Dimming	W Wall Washer	27 2700K 30 3000K 35 3500K 40 4000K	B Black W White	WT White BK Black

Example: AOR140WL-22EW40BWT



Model	Comment	LED Power	System Lumens	Driver	Beam	CCT	Reflector	Finish
AOR140	WL Wall Washer Trimless	32 LED 32W	2300lm(@32W 3000K)	E ON-OFF D 0-10V Dimming	W Wall Washer	27 2700K 30 3000K 35 3500K 40 4000K	B Black W White	WT White BK Black

Example: AOR140WL-32EW40BWT


AOR140WL-11EW40BWT

Specifications:

Wall height (m): 3.0

Offset from wall (m): 0.6

Luminaire spacing (m): 0.6



H (m)	Surface illumination (lux)				
	below the luminaire	between the luminaire	below the luminaire	between the luminaire	below the luminaire
2.85	103	105	104	105	102
2.55	189	192	193	191	187
2.25	167	171	173	171	166
1.95	125	130	131	129	124
1.65	90	94	95	94	89
1.35	61	64	65	64	61
1.05	46	48	48	47	45
0.75	35	36	37	36	35
0.45	25	26	27	26	25
0.15	21	21	21	21	20

Specifications:

Wall height (m): 3.0

Offset from wall (m): 1

Luminaire spacing (m): 1

H (m)	Surface illumination (lux)				
	below the luminaire	between the luminaire	below the luminaire	between the luminaire	below the luminaire
2.85	29	29	29	29	28
2.55	53	55	54	54	53
2.25	70	71	71	70	69
1.95	69	70	70	70	68
1.65	61	62	63	62	60
1.35	50	51	52	51	49
1.05	42	43	44	43	41
0.75	35	36	36	36	34
0.45	27	29	29	28	27
0.15	23	24	24	24	23


AOR140WL-22EW40BWT

Specifications:

Wall height (m): 4.5

Offset from wall (m): 1

Luminaire spacing (m): 1



H (m)	Surface illumination (lux)				
	below the luminaire	between the luminaire	below the luminaire	between the luminaire	below the luminaire
4.275	79	81	80	81	79
3.825	141	144	144	144	141
3.375	140	142	144	142	139
2.925	112	115	116	115	112
2.475	84	87	89	87	84
2.025	62	65	66	65	62
1.575	48	50	51	50	48
1.125	38	39	40	39	38
0.675	29	30	31	30	29
0.225	25	25	26	25	24

Specifications:

Wall height (m): 4.5

Offset from wall (m): 1.5

Luminaire spacing (m): 1.5

H (m)	Surface illumination (lux)				
	below the luminaire	between the luminaire	below the luminaire	between the luminaire	below the luminaire
4.275	32	32	32	32	32
3.825	54	55	55	55	54
3.375	69	70	70	70	69
2.925	68	69	70	69	68
2.475	61	63	63	63	61
2.025	51	53	53	53	51
1.575	44	45	46	45	44
1.125	37	38	39	38	37
0.675	30	31	32	31	30
0.225	26	27	27	27	26

Light Distribution


AOR140WL-32EW40BWT

Specifications :

Wall height (m): 6

Offset from wall (m): 1.5

Luminaire spacing (m): 1.5



H (m)	Surface illumination (lux)				
	below the luminaire	between the luminaire	below the luminaire	between the luminaire	below the luminaire
5.7	77	79	78	79	77
5.1	137	139	140	139	137
4.5	154	157	158	157	154
3.9	134	137	138	137	133
3.3	106	109	110	109	106
2.7	84	87	88	87	84
2.1	68	71	72	71	68
1.5	57	58	59	58	56
0.9	46	47	48	47	45
0.3	44	45	46	45	44

Specifications :

Wall height (m): 6

Offset from wall (m): 2

Luminaire spacing (m): 2


H (m)	Surface illumination (lux)				
	below the luminaire	between the luminaire	below the luminaire	between the luminaire	below the luminaire
5.7	47	47	47	47	47
5.1	74	73	73	73	74
4.5	95	95	95	95	95
3.9	96	96	97	96	96
3.3	87	88	89	88	87
2.7	74	75	76	75	74
2.1	65	66	66	66	64
1.5	56	57	58	57	56
0.9	46	47	48	47	46
0.3	45	46	47	46	45

Accessories

Model	Description	Picture	Drawing
AOR140DL-RC004	4-head Embedded Parts		
AOR140DL-RC008	8-head Embedded Parts		
AOR140DL-RC012	12-head Embedded Parts		


INTERIOR LIGHTING DOWNLIGHT WIRING SCHEMATIC DIAGRAM

0/1-10V dimming control system (220V AC)

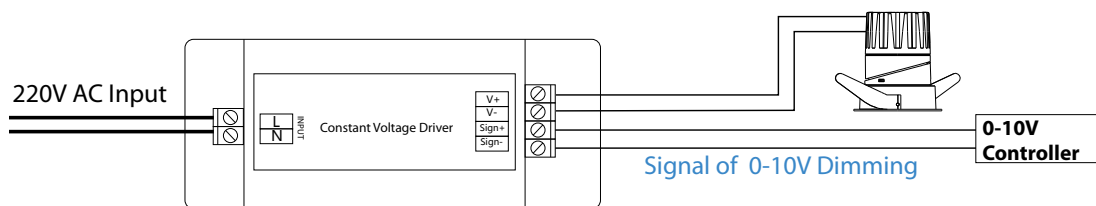


1. Recommend using RVVP 2*1.0 signal wires.
2. The signal is low-voltage input and cannot be connected to 220V AC directly. Wrong connection may damage LED driver and even the whole luminaires.

DALI dimming control system (220V AC)

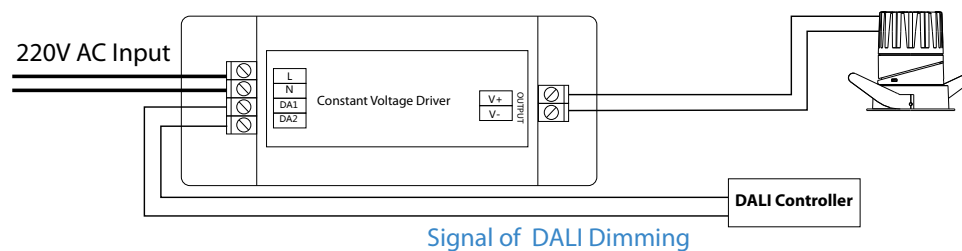


1. Recommend using RVVP 2*1.0 signal wires.
2. The signal is low-voltage input and cannot be connected to 220V AC directly. Wrong connection may damage LED driver and even the whole luminaires.

DMX dimming control system (220V AC)

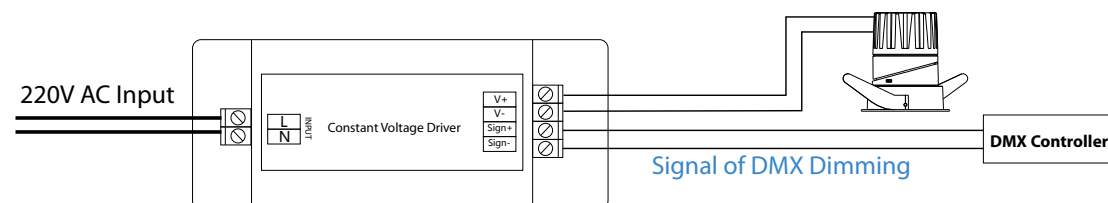


1. Recommend using RVVP 2*1.0 signal wires.
2. The signal is low-voltage input and cannot be connected to 220V AC directly. Wrong connection may damage LED driver and even the whole luminaires.

DALI dimming control system (220V AC Tunnable)

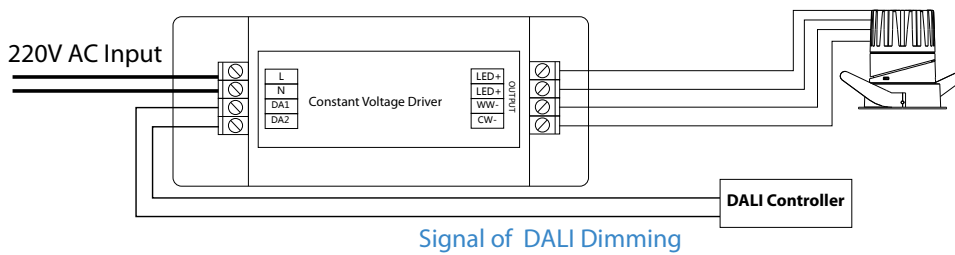

1. Recommend using RVVP 2*1.0 signal wires.
2. The signal is low-voltage input and cannot be connected to 220V AC directly. Wrong connection may damage LED driver and even the whole luminaires.

DMX dimming control system (24V DC)

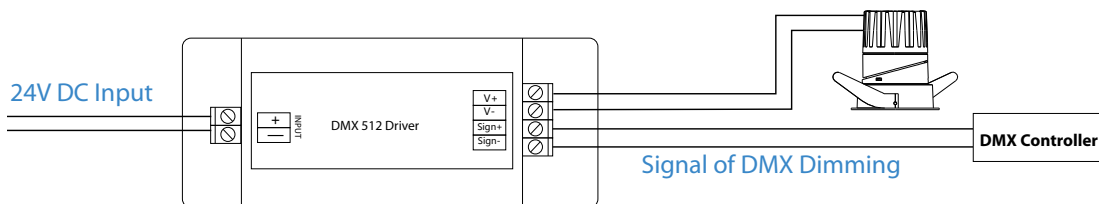

1. Recommend using RVVP 2*1.0 signal wires.
2. The signal is low-voltage input and cannot be connected to 220V AC directly. Wrong connection may damage LED driver and even the whole luminaires.



CLASS I



CLASS II



CLASS III



Ambient Temperature
-20°C -50°C



Ambient Temperature
-20°C -40°C



Dimmable Luminaires



DMX512 Protocol Compatible



DALI Compatible



High CRI
(Ra>90)



Input Voltage
220V AC/50Hz



Input Voltage
100V-240V AC 50/60Hz



Low Voltage Input
12V DC



Low Voltage Input
24V DC



Low Voltage Input
24V AC/DC



Low Voltage Input
48V DC



Low Voltage Input
5V DC



CCC Certified



CQC Certified



IK Rated



IK Rated



IK Rated



Static Load



IP Rated



IP Rated



IP Rated



IP Rated



IP Rated



IP Rated




Invention Patented SUBROSA®
Glare-free Optical System



Patented LiteBrush® Optical System



Patented MicroLattice® Optical System



Adjustable color temperature



InP-Power
Electrical System

GLOBAL HEADQUARTERS & RESEARCH CENTER
44 Harbor Park Drive
Port Washington, NY 11050
Tel: 1.800-526-2588
Fax: 1.800-526-2585

China Main Office
WAC Lighting Technology(Shanghai) Co., Ltd.
299-14, Bisheng Road, Zhangjiang
Pudong New District, Shanghai China 201204
Tel: 86.21.33933558

Global Manufacturing Base
700/23 Moo 7, Khao Khan Song Subdistrict, Sri Racha
District, Chonburi Thailand 20110

www.waclighting.net



2025.04