

2" Trimless Recessed Tunable Downlight

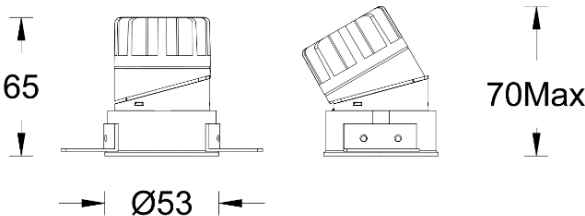
PROJECT :

TYPE:

Product Image



Line Drawing



Product Description

ULTRA Tunable series LED round endless embedded tunable color temperature downlight, through a unique Angle adjustment, taking into account the function of downlighting and adjustment (one light multi-purpose). The whole lamp sealing design ensures that there is no light leakage during the adjustment process, the lamp adopts the modular design, the on-site lamp can be freely disassembled and replaced the reflector and the lamp body, so as to achieve a variety of specifications and the free switching of light mode, and the perfect integration of the ceiling after installation. In terms of optics, it adopts a new hidden light technology and is equipped with a color temperature control function, which is mainly suitable for indoor places such as hotels, villas and commercial Spaces.

Product Features

- Body Material: Aluminum alloy die-cast lamp body
- Optical System: Lens + anti-glare reflector
- Finish: Electrostatic powder spraying
- Adjustable Angle: Vertical adjustment 0-30 °, horizontal adjustment 0-360 °
- Accessories: As attached
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class II
- Operating Temperature: -20°C~40°C

Product Specifications

- Cut-out: Ø60mm
- Ceiling Thickness: 5mm~15mm
- Shielding Angle: 35°
- LED Type: COB
- Source Lm: 700lm
- LED Lifetime: >36000h-L70/B10-Ta25°C(LM-80/TM-2 1)
- CCT/ SDCM: 2700K-6000K Adjustment, CRI≥90
- Input: 220V AC / 50 Hz
- Dimming: DALI(must be tested for compatibility with the project site system in advance)
- Net Weight: 0.12Kg without packing

Order Model

Model	Size	Trim	LED	Driver	Beam	CCT	Reflector	Finish
ADLN	2	2	LM07	A DALI	2 24°	CC 2700K-6000K	B Black	WT White
Downlight	2"	Round Trim	COB 7W	N No Driver	3 36°	(Tunable)	S Specular	BK Black
N series					5 50°			

Example: ADLN22-LM07A2CCSWT





ULTRA TUNABLE- MODEL: ADLN22

WAC LIGHTING

2" Trimless Recessed Tunable Downlight




PROJECT :

TYPE:

<b>ALENS-08-BEL</b> Striped glass lens		<b>ALENS-08-BSL</b> Soft glass lens		<b>ALENS-08-FR</b> Frosted glass lens		<b>ALENS-08-HCL</b> Honeycomb	
---	---	--	---	--	---	----------------------------------	---

Note: Up to one optical accessory can be added, which is not delivered with accessories and needs to be ordered separately.

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

	<b>MODEL:</b> ADLN22-LM07A2CCSWT		<b>MODEL:</b> ADLN22-LM07A3CCSWT
<b>BEAM ANGLE:</b> 24°		<b>BEAM ANGLE:</b> 36°	
<b>POWER:</b> 8.4W		<b>POWER:</b> 8.4W	
<b>LUMENS:</b> 395lm		<b>LUMENS:</b> 380lm	
<b>CBCP:</b> 1992cd		<b>CBCP:</b> 769cd	
<b>EFFICACY:</b> 47lm/W		<b>EFFICACY:</b> 45lm/W	
	<b>MODEL:</b> ADLN22-LM07A5CCSWT		
<b>BEAM ANGLE:</b> 50°			
<b>POWER:</b> 8.4W			
<b>LUMENS:</b> 348lm			
<b>CBCP:</b> 499cd			
<b>EFFICACY:</b> 41lm/W			

3" Trimless Recessed Tunable Downlight

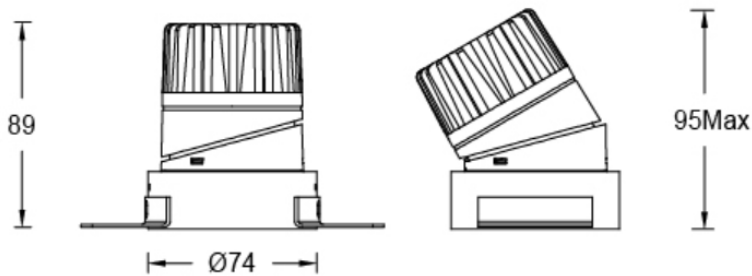
PROJECT :

TYPE:

Product Image



Line Drawing



Product Description

ULTRA Tunable series LED round endless embedded tunable color temperature downlight, through a unique Angle adjustment, taking into account the function of downlighting and adjustment (one light multi-purpose). The whole lamp sealing design ensures that there is no light leakage during the adjustment process, the lamp adopts the modular design, the on-site lamp can be freely disassembled and replaced the reflector and the lamp body, so as to achieve a variety of specifications and the free switching of light mode, and the perfect integration of the ceiling after installation. In terms of optics, it adopts a new hidden light technology and is equipped with a color temperature control function, which is mainly suitable for indoor places such as hotels, villas and commercial Spaces.

Product Features

- Body Material: Aluminum alloy die-cast lamp body
- Optical System: Lens + anti-glare reflector
- Finish: Electrostatic powder spraying
- Adjustable Angle: Vertical adjustment 0-30 °, horizontal adjustment 0-360 °
- Accessories: As attached
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class II
- Operating Temperature: -20°C~40°C

Product Specifications

- Cut-out: Ø82mm
- Ceiling Thickness 5mm~25mm
- Shielding Angle: 35°
- LED Type: COB
- Source Lm: 1300lm
- LED Lifetime: >36000h-L70/B10-Ta25°C(LM-80/TM-2 1)
- CCT/ SDCM: 2700K-6000K Adjustment, CRI≥90
- Input: 220V AC / 50 Hz
- Dimming: DALI(must be tested for compatibility with the project site system in advance)
- Net Weight: 0.45Kg without packing

Order Model

Model	Size	Trim	LED	Driver	Beam	CCT	Reflector	Finish
ADLN	3	2	LM13	A DALI	1 18°	CC 2700K-6000K	B Black	WT White
Downlight	3"	Round Trim	COB 13W	N No Driver	2 24°	(Tunable)	S Specular	BK Black
N series					3 36°			
					5 50°			

Example: ADLN32-LM13A2CCSWT

Note: 18° factory default with endless honeycomb grille





3" Trimless Recessed Tunable Downlight

PROJECT :

TYPE:

<div>ALENS-11-BEL</div> <div>Striped glass lens</div> <div></div>	<div>ALENS-11-BSL-ULTRA</div> <div>Soft glass lens</div> <div></div>	<div>ALENS-11-FR</div> <div>Frosted glass lens</div> <div></div>	<div>ALENS-11-HCL-ULTRA</div> <div>Honeycomb</div> <div></div>
---	--	--	--

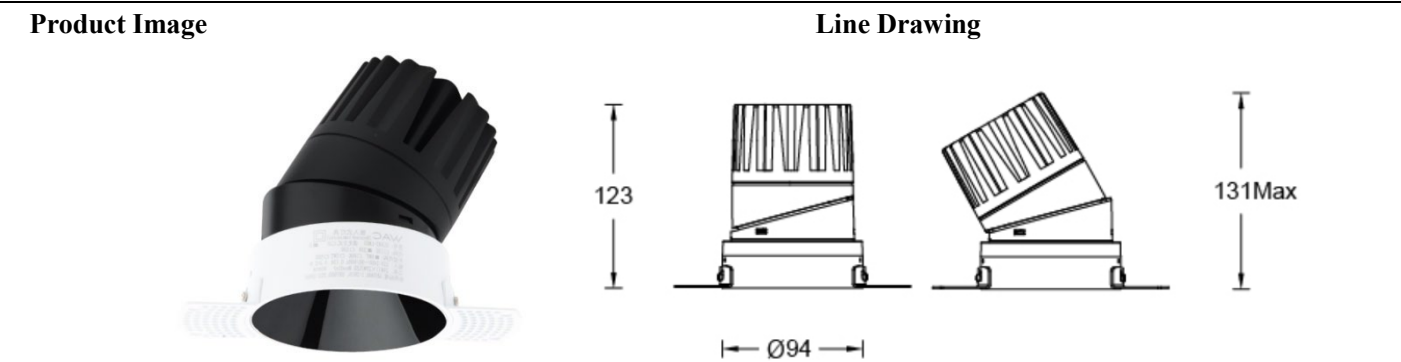
Note: Up to one optical accessory can be added, which is not delivered with accessories and needs to be ordered separately.

	<div>MODEL:</div> <div>ADLN32-LM13A1CCSWT</div> <div>BEAM ANGLE:</div> <div>18°</div> <div>POWER:</div> <div>16W</div> <div>LUMENS:</div> <div>688lm</div> <div>CBCP:</div> <div>4588cd</div> <div>EFFICACY:</div> <div>43lm/W</div>		<div>MODEL:</div> <div>ADLN32-LM13A2CCSWT</div> <div>BEAM ANGLE:</div> <div>28°</div> <div>POWER:</div> <div>16W</div> <div>LUMENS:</div> <div>1042lm</div> <div>CBCP:</div> <div>3976cd</div> <div>EFFICACY:</div> <div>65lm/W</div>
	<div>MODEL:</div> <div>ADLN32-LM13A3CCSWT</div> <div>BEAM ANGLE:</div> <div>36°</div> <div>POWER:</div> <div>16W</div> <div>LUMENS:</div> <div>923lm</div> <div>CBCP:</div> <div>2309cd</div> <div>EFFICACY:</div> <div>58lm/W</div>		<div>MODEL:</div> <div>ADLN32-LM13A5CCSWT</div> <div>BEAM ANGLE:</div> <div>50°</div> <div>POWER:</div> <div>16W</div> <div>LUMENS:</div> <div>740lm</div> <div>CBCP:</div> <div>902cd</div> <div>EFFICACY:</div> <div>46lm/W</div>

4" Trimless Recessed Tunable Downlight

PROJECT :

TYPE:



Product Description

ULTRA Tunable series LED round endless embedded tunable color temperature downlight, through a unique Angle adjustment, taking into account the function of downlighting and adjustment (one light multi-purpose). The whole lamp sealing design ensures that there is no light leakage during the adjustment process, the lamp adopts the modular design, the on-site lamp can be freely disassembled and replaced the reflector and the lamp body, so as to achieve a variety of specifications and the free switching of light mode, and the perfect integration of the ceiling after installation. In terms of optics, it adopts a new hidden light technology and is equipped with a color temperature control function, which is mainly suitable for indoor places such as hotels, villas and commercial Spaces.

Product Features

- Body Material: Aluminum alloy die-cast lamp body
- Optical System: Lens + anti-glare reflector
- Finish: Electrostatic powder spraying
- Adjustable Angle: Vertical adjustment 0-30 °, horizontal adjustment 0-360 °
- Accessories: As attached
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class II
- Operating Temperature: -20°C~40°C

Product Specifications

- Cut-out: Ø105mm
- Ceiling Thickness 5mm~25mm
- Shielding Angle: 35°
- LED Type: COB
- Source Lm: 3000lm
- LED Lifetime: >36000h-L70/B10-Ta25°C(LM-80/TM-2 1)
- CCT/ SDCM: 2700K-6000K Adjustment, CRI≥90
- Input: 220V AC / 50 Hz
- Dimming: No dimming/DALI(must be tested for compatibility with the project site system in advance)
- Net Weight: 0.8Kg without packing

Order Model

Model	Size	Trim	LED	Driver	Beam	CCT	Reflector	Finish
ADLN Downlight N series	4	2	LM25	A DALI	1	18° 2700K-6000K (Tunable)	B Black S Specular	WT White BK Black
	4"	Round Trim	COB 25W	N No Driver	2			
					28°			
					36°			
					50°			

Example: ADLN42-LM25A2CCSWT


4" Trimless Recessed Tunable Downlight

PROJECT :

TYPE:


ALENS-16-BEL-C

Striped glass lens




ALENS-16-BSL-SW

Soft glass lens







ALENS-16-HCL-ULTRA

Honeycomb



Note: Up to one optical accessory can be added, which is not delivered with accessories and needs to be ordered separately.

	<div>MODEL:ADLN42-LM25A1CCSWT</div> <div>BEAM ANGLE:18°</div> <div>POWER:27W</div> <div>LUMENS:1672lm</div> <div>CBCP:11139cd</div> <div>EFFICACY:62lm/W</div>		<div>MODEL:ADLN42-LM25A2CCSWT</div> <div>BEAM ANGLE:28°</div> <div>POWER:27W</div> <div>LUMENS:1821lm</div> <div>CBCP:8382cd</div> <div>EFFICACY:67lm/W</div>
	<div>MODEL:ADLN42-LM25A3CCSWT</div> <div>BEAM ANGLE:36°</div> <div>POWER:27W</div> <div>LUMENS:1502lm</div> <div>CBCP:2921cd</div> <div>EFFICACY:56lm/W</div>		<div>MODEL:ADLN42-LM25A5CCSWT</div> <div>BEAM ANGLE:50°</div> <div>POWER:27W</div> <div>LUMENS:1469lm</div> <div>CBCP:2161cd</div> <div>EFFICACY:54 lm/W</div>