


ULTRA TUNABLE - MODEL: ADLN33

3" CCT Tunable Downlight

WAC LIGHTING

PROJECT:

TYPE:

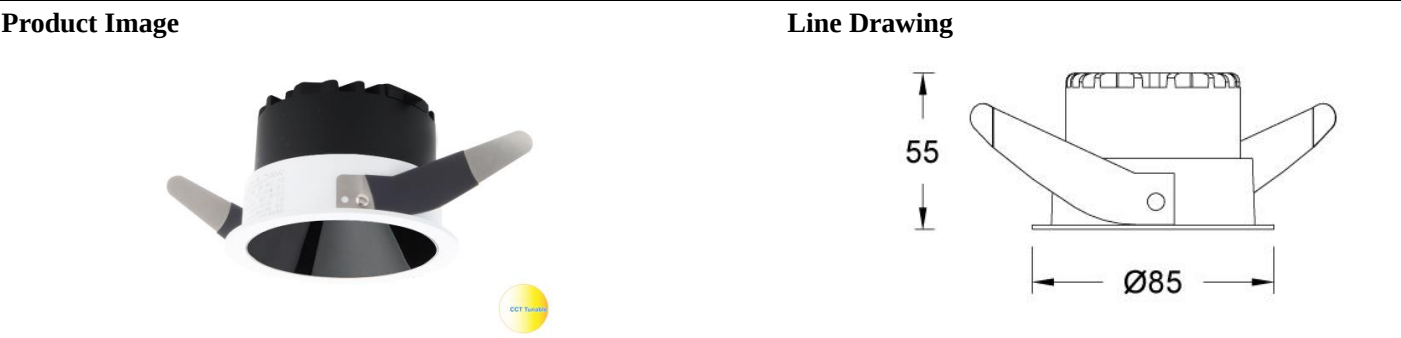

Product Description

The ULTRA Tunable series LED circular narrow-edge embedded downlight has a total height of only 55mm, Through glass sealing design, it can be used for anti fog or low ceiling spaces. The lighting fixtures adopt modular design, allowing for free disassembly and replacement of reflectors or mounting frames on site, thereby achieving free switching of various specifications and lighting methods. After installation, they are perfectly integrated with the ceiling. In terms of optics, a new hidden light technology is adopted and equipped with color temperature adjustable function, which is mainly suitable for indoor places such as hotels, villas, and commercial spaces.

Product Features		Product Specifications	
• Body Material:	Aluminum alloy die-casting	• Cut-out:	Ø78
• Optical System:	Lens+ SUBOROSA optical system	• Ceiling Thickness	5mm~25mm
• Finish:	Static electricity powder coating	• Shielding Angle:	35 °
• Adjustable Angle:	Horizontal 0-360 °, vertical non adjustable	• LED Type:	COB
• Accessories/brackets:	As attached	• Source Lm:	1300LM
• Certification:	CCC	• LED Lifetime:	>36000h-L70 /B10-Ta25°C(LM-80/TM-21)
• IP Rating:	IP20	• CCT/CRI:	2700K~6000K Tunable, CRI≥Ra90
• Insulation Level:	Class II	• Input:	220V AC / 50Hz
• Operating Temperature:	-20°C~40°C	• Dimming:	DALI
		• Net Weight:	0.3Kg without packing

Order Model

Model	Size	Trim	LED	Driver	Beam	CCT	Reflector	Finish
ADLN Downlight N series	3 3"	3 Round Trim	LM13 COB 13W	N NO DRIVER A DALI	1 18 °	CC 2700-6000K (Tunable)	B Black S Specular	WT
					2 28 °			White
					3 36 °			BK
					5 50 °			Black

Example: ADLN33-LM13A2CCSWT
Note: 18 °factory default with borderless honeycomb grille

ULTRA TUNABLE - MODEL: ADLN33

3" CCT Tunable Downlight



PROJECT:

TYPE:


ALENS-12-HCL-ULTRA

Honeycomb




Note: Accessories need to be ordered separately. The 18 °factory default comes with an endless honeycomb grille, which is installed on the back of the reflector.


LIGHT DISTRIBUTION@3000K LUMINAIRE DATA




MODEL:	ADLN33-LM13A1CCSWT
BEAM ANGLE:	18 °
POWER:	16W
LUMENS:	688lm
CBCP:	4588cd
EFFICACY:	43lm/W



MODEL:	ADLN33-LM13A2CCSWT
BEAM ANGLE:	28 °
POWER:	16W
LUMENS:	1042lm
CBCP:	3976cd
EFFICACY:	65lm/W



MODEL:	ADLN33-LM13A3CCSWT
BEAM ANGLE:	36 °
POWER:	16W
LUMENS:	923lm
CBCP:	2309cd
EFFICACY:	58lm/W



MODEL:	ADLN33-LM13A5CCSWT
BEAM ANGLE:	50 °
POWER:	16W
LUMENS:	740lm
CBCP:	902cd
EFFICACY:	46lm/W