

2" Trimless Recessed Dual-head Downlight


PROJECT :

TYPE:

Product Image



Line Drawing

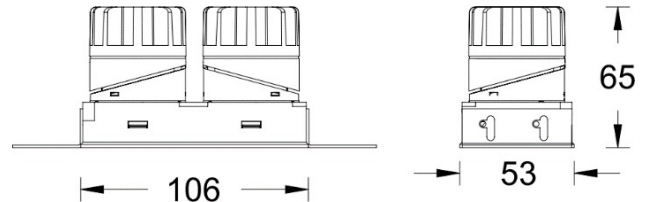

Product Description

ULTRA series LED narrow side recessed multiples lamps, through a unique Angle adjustment method, taking into account the function of downlight and adjustable (one lamp multi-purpose). The whole lamp sealing design ensures that there is no light leakage during the adjustment process, the lamp adopts the modular design, the on-site lamp can be freely disassembled and replaced the reflector and the lamp body, so as to achieve a variety of specifications and the free switching of light mode, and the perfect integration of the ceiling after installation. Optical uses a new hidden light technology, good anti-glare performance and color consistency control, with comfortable light effect, mainly suitable for hotels, villas and commercial space and other indoor places.

Product Features

- Body Material: Aluminum alloy die-casting
- Optical System: Lens + anti-glare reflector
- Finish: Static electricity powder coating
- Adjustable Angle: Vertical: 0-30° , Horizontal: 0-360°
- Accessories: As attached
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class II
- Operating Temperature: -20°C~40°C

Product Specifications

- Cut-out: 116*53mm
- Ceiling Thickness: 5mm~15mm
- Shielding Angle: 35°
- LED Type: COB
- Source Lm: Single-head as follows, Two-head×2
2700K: 5W 534lm; 7W 689lm;
3000K: 5W 564lm; 7W 728lm;
3500K: 5W 588lm; 7W 759lm;
4000K: 5W 600lm; 7W 775lm;
5000K: 5W 606lm; 7W 782lm;
- LED Lifetime: >36000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K/3000K/3500K/4000K/5000K, CRI≥90
- Input: 220V AC / 50Hz
- Dimming: On-off /0-10V/DALI
- Net Weight: 0.3Kg without packing

Order Model

Model	Size	Trim	LED	Driver	Beam	CCT	Reflector	Finish
AMTN Multiple Downlight N series	2 2"	6 Rectangular Trimless	205 COB 2*5W	E On-Off	1 15°	27 2700K	B Black	WT White
			207 COB 2*7W	D 0-10V	2 24°	30 3000K	S Specular	BK Black
				Dimming	3 36°	35 3500K		
					5 50°	40 4000K		
			207 COB 2*7W	N No Driver A DALI		50 5000K		

Example: AMTN26-207E230SWT

Note: 15°factory default with honeycomb

WAC Lighting
www.waclighting.com (US)
www.waclighting.net (International)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting Technology (Shanghai) Co, Ltd.
14,Lane 299, Bi Sheng Road,Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

ULTRA - MODEL: AMTN26

WAC LIGHTING

2" Trimless Recessed Dual-head Downlight

PROJECT :


TYPE:

Accessories


ALENS-08-BEL Striped glass lens		ALENS-08-BSL Soft glass lens		ALENS-08-FR Frosted glass lens		ALENS-08-HCL Honeycomb	
---	---	--	---	--	---	----------------------------------	---

Note: Up to one optical accessory can be added; Which 15° factory default with honeycomb


LIGHT DISTRIBUTION@3000K LUMINAIRE DATA




MODEL:	AMTN26-207E130SWT
BEAM ANGLE:	15°
POWER:	2*9W
LUMENS:	2*316 lm
CBCP:	2*2920 cd
EFFICACY:	35 lm/W



MODEL:	AMTN26-207E230SWT
BEAM ANGLE:	24°
POWER:	2*9W
LUMENS:	2*526 lm
CBCP:	2*2442 cd
EFFICACY:	58 lm/W



MODEL:	AMTN26-207E330SWT
BEAM ANGLE:	36°
POWER:	2*9W
LUMENS:	2*509 lm
CBCP:	2*1184 cd
EFFICACY:	57 lm/W



MODEL:	AMTN26-207E530SWT
BEAM ANGLE:	50°
POWER:	2*9W
LUMENS:	2*453 lm
CBCP:	2*661 cd
EFFICACY:	50 lm/W

ULTRA - MODEL: AMTN36

WAC LIGHTING

3" Trimless Recessed Dual-head Downlight


PROJECT :

TYPE:

Product Image



Line Drawing

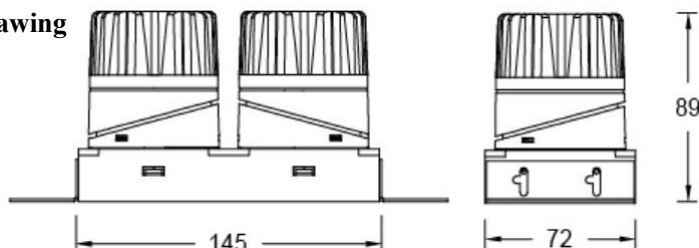

Product Description

ULTRA series LED narrow side recessed multiples lamps, through a unique Angle adjustment method, taking into account the function of downlight and adjustable (one lamp multi-purpose). The whole lamp sealing design ensures that there is no light leakage during the adjustment process, the lamp adopts the modular design, the on-site lamp can be freely disassembled and replaced the reflector and the lamp body, so as to achieve a variety of specifications and the free switching of light mode, and the perfect integration of the ceiling after installation. Optical uses a new hidden light technology, good anti-glare performance and color consistency control, with comfortable light effect, mainly suitable for hotels, villas and commercial space and other indoor places.

Product Features

- Body Material: Aluminum alloy die-casting
- Optical System: Lens + anti-glare reflector
- Finish: Static electricity powder coating
- Adjustable Angle: Vertical: 0-30° , Horizontal: 0-360°
- Accessories: As attached
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class II
- Operating Temperature: -20°C~40°C

Product Specifications

- Cut-out: 150*72mm
- Ceiling Thickness: 5mm~25mm
- Shielding Angle: 35°
- LED Type: COB
- Source Lm: Single-head as follows, Two-head×2
2700K: 8W 682lm; 7W 758lm; 10W 1080lm; 13W 1404lm
3000K: 8W 720lm; 7W 800lm; 10W 1150lm; 13W 1495lm
3500K: 8W 752lm; 7W 835lm; 10W 1195lm; 13W 1554lm
4000K: 8W 765lm; 7W 850lm; 10W 1210lm; 13W 1573lm
5000K: 8W 774lm; 7W 860lm; 10W 1220lm; 13W 1586lm
- LED Lifetime: >36000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K/3000K/3500K/4000K/5000KCRI≥90
- Input: 220V AC / 50Hz
- Dimming: On-off /0-10V/DALI
- Net Weight: 0.9Kg without packing

Order Model

Model	Size	Trim	LED	Driver	Beam	CCT	Reflector	Finish
AMTN Multiple Downlight N series	3"	Rectangular Trimless	208 COB 2*8W	E On-Off D 0-10V Dimming	S 8°	27 2700K	B Black	WT White
			207 COB 2*7W		N 13°	30 3000K	S Specular	BK Black
			210 COB 2*10W		1 18°	35 3500K		
			213 COB 2*13W	N No Driver A DALI	2 28°	40 4000K		
					3 36°	50 5000K		
			213 COB 2*13W		5 50°			

Example: AMTN36-207EN30SWT

Note: 8°、13°and 18°factory default with honeycomb

WAC Lighting
www.waclighting.com (US)
www.waclighting.net (International)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting Technology (Shanghai) Co, Ltd.
14,Lane 299, Bi Sheng Road,Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

WAC Lighting reserves the right to periodically design and update products. 2022-07-12

ULTRA - MODEL: AMTN36

WAC LIGHTING

3" Trimless Recessed Dual-head Downlight

PROJECT :


TYPE:

Accessories


ALENS-11-BEL Striped glass lens		ALENS-11-BSL-ULTRA Soft glass lens		ALENS-11-FR Frosted glass lens		ALENS-11-HCL-ULTRA Honeycomb	
---	---	--	---	--	---	--	---

Note: Up to one optical accessory can be added; 8°、13°and 18°factory default with honeycomb


LIGHT DISTRIBUTION@3000K LIMINAIRE DATA




MODEL:	AMTN36-207EN30SWT
BEAM ANGLE:	13°
POWER:	2*9W`
LUMENS:	2*533 lm
CBCP:	2*5684 cd
EFFICACY:	59 lm/W




MODEL:	AMTN36-210EN30SWT
BEAM ANGLE:	13°
POWER:	2*11W`
LUMENS:	2*643 lm
CBCP:	2*7056 cd
EFFICACY:	58 lm/W




MODEL:	AMTN36-213EN30SWT
BEAM ANGLE:	13°
POWER:	2*15W`
LUMENS:	2*820 lm
CBCP:	2*8174 cd
EFFICACY:	55 lm/W




MODEL:	AMTN36-207E130SWT
BEAM ANGLE:	18°
POWER:	2*9W
LUMENS:	2*585 lm
CBCP:	2*4163 cd
EFFICACY:	65 lm/W




MODEL:	AMTN36-210E130SWT
BEAM ANGLE:	18°
POWER:	2*11W `
LUMENS:	2*714 lm
CBCP:	2*5090 cd
EFFICACY:	65 lm/W



MODEL:	AMTN36-213E130SWT
BEAM ANGLE:	18°
POWER:	2*15W `
LUMENS:	2*935 lm
CBCP:	2*6848 cd
EFFICACY:	62 lm/W



MODEL:	AMTN36-207E230SWT
BEAM ANGLE:	28°
POWER:	2*9W
LUMENS:	2*641 lm
CBCP:	2*2885 cd
EFFICACY:	71 lm/W



MODEL:	AMTN36-210E230SWT
BEAM ANGLE:	28°
POWER:	2*11W`
LUMENS:	2*790 lm
CBCP:	2*3511 cd
EFFICACY:	71 lm/W


ULTRA - MODEL: AMTN36

3" Trimless Recessed Dual-head Downlight

WAC LIGHTING

PROJECT :

TYPE:



MODEL: AMTN36-213E230SWT


BEAM ANGLE: 28°

POWER: 2*15W

LUMENS: 2*1035 lm

CBCP: 2*4511 cd

EFFICACY: 69 lm/W



MODEL: AMTN36-207E330SWT


BEAM ANGLE: 36°

POWER: 2*9W

LUMENS: 2*643 lm

CBCP: 2*1497 cd

EFFICACY: 71 lm/W



MODEL: AMTN36-210E330SWT


BEAM ANGLE: 36°

POWER: 2*11W

LUMENS: 2*804 lm

CBCP: 2*1857 cd

EFFICACY: 73 lm/W



MODEL: AMTN36-213E330SWT


BEAM ANGLE: 36°

POWER: 2*15W

LUMENS: 2*1024 lm

CBCP: 2*2375 cd

EFFICACY: 68 lm/W



MODEL: AMTN36-207E530SWT


BEAM ANGLE: 50°

POWER: 2*9W

LUMENS: 2*425 lm

CBCP: 2*574 cd

EFFICACY: 47 lm/W



MODEL: AMTN36-210E530SWT


BEAM ANGLE: 50°

POWER: 2*11W

LUMENS: 2*532 lm

CBCP: 2*717 cd

EFFICACY: 48 lm/W



MODEL: AMTN36-213E530SWT


BEAM ANGLE: 50°

POWER: 2*15W

LUMENS: 2*677 lm

CBCP: 2*914 cd

EFFICACY: 45 lm/W



MODEL: AMTN36-208E30SWT

BEAM ANGLE: 8°

POWER: 2*10W

LUMENS: 2*375 lm

CBCP: 2*9280 cd

EFFICACY: 38 lm/W

ULTRA - MODEL: AMTN46

WAC LIGHTING

4" Trimless Recessed Dual-head Downlight


PROJECT :

TYPE:

Product Image



Line Drawing

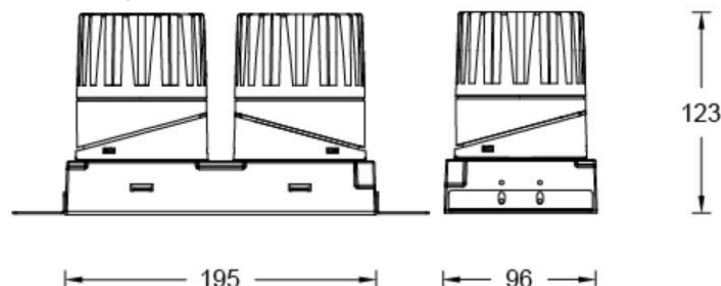

Product Description

ULTRA series LED narrow side recessed multiples lamps, through a unique Angle adjustment method, taking into account the function of downlight and adjustable (one lamp multi-purpose). The whole lamp sealing design ensures that there is no light leakage during the adjustment process, the lamp adopts the modular design, the on-site lamp can be freely disassembled and replaced the reflector and the lamp body, so as to achieve a variety of specifications and the free switching of light mode, and the perfect integration of the ceiling after installation. Optical uses a new hidden light technology, good anti-glare performance and color consistency control, with comfortable light effect, mainly suitable for hotels, villas and commercial space and other indoor places.

Product Features

- Body Material: Aluminum alloy die-casting
- Optical System: Lens + anti-glare reflector
- Finish: Static electricity powder coating
- Adjustable Angle: Vertical: 0-30°, Horizontal: 0-360°
- Accessories: As attached
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class II
- Operating Temperature: -20°C~40°C

Product Specifications

- Cut-out: 205*100mm
- Ceiling Thickness: 5mm~25mm
- Shielding Angle: 35°
- LED Type: COB
- Source Lm: Single-head as follows, Two-head×2
2700K: 8W 682lm; 13W 1530lm; 18W 2065lm; 25W 2755lm
3000K: 8W 720lm; 13W 1645lm; 18W 2220lm; 25W 2960lm
3500K: 8W 752lm; 13W 1680lm; 18W 2270lm; 25W 3025lm
4000K: 8W 765lm; 13W 1770lm; 18W 2390lm; 25W 3185lm
5000K: 8W 774lm; 13W 1780lm; 18W 2405lm; 25W 3205lm
- LED Lifetime: >36000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K/3000K/3500K/4000K/5000KCRI≥90
- Input: 220V AC / 50Hz
- Dimming: On-off /0-10V/DALI
- Net Weight:: 1.3Kg without packing

Order Model

Model	Size	Trim	LED	Driver	Beam	CCT	Reflector	Finish
AMTN Multiple Downlight N series	4 4"	6 Rectangular Trimless	208 COB 2*8W	E On-Off D 0-10V Dimming	S 8°	27 2700K	B Black	WT White
			213 COB 2*13W		N 13°	30 3000K	S Specular	BK Black
			218 COB 2*18W		1 19°	35 3500K		
			225 COB 2*25W		2 28°	40 4000K		
					3 36°	50 5000K		
			225 COB 2*25W	N No Driver A DALI	5 50°			

Example: AMTN46-218E-230SWT

WAC Lighting
www.waclighting.com (US)
www.waclighting.net (International)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting Technology (Shanghai) Co, Ltd.
14, Lane 299, Bi Sheng Road, Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

WAC Lighting reserves the right to periodically design and update products. 2022-07-12

ULTRA - MODEL: AMTN46

4" Trimless Recessed Dual-head Downlight

WAC LIGHTING

PROJECT :


TYPE:

Accessories


ALENS-16-BEL-C Striped glass lens		ALENS-16-BSL-SW Soft glass lens		ALENS-16-HCL-ULTRA Honeycomb	
---	---	---	---	--	---

Note: Up to one optical accessory can be added, the product does not come with accessories, need to order separately


LIGHT DISTRIBUTION@3000K LUMINAIRE DATA




MODEL:	AMTN46-213EN30SWT
BEAM ANGLE:	13°
POWER:	2*15W
LUMENS:	2*969 lm
CBCP:	2*8386 cd
EFFICACY:	65 lm/W




MODEL:	AMTN46-218EN30SWT
BEAM ANGLE:	13°
POWER:	2*21W
LUMENS:	2*1309 lm
CBCP:	2*11333 cd
EFFICACY:	62 lm/W




MODEL:	AMTN46-225EN30SWT
BEAM ANGLE:	13°
POWER:	2*29W
LUMENS:	2*1716 lm
CBCP:	2*14853 cd
EFFICACY:	59 lm/W




MODEL:	AMTN46-213E130SWT
BEAM ANGLE:	19°
POWER:	2*15W
LUMENS:	2*1135 lm
CBCP:	2*5812 cd
EFFICACY:	76 lm/W




MODEL:	AMTN46-218E130SWT
BEAM ANGLE:	19°
POWER:	2*21W
LUMENS:	2*1533 lm
CBCP:	2*7854 cd
EFFICACY:	73 lm/W



MODEL:	AMTN46-225E130SWT
BEAM ANGLE:	19°
POWER:	2*29W
LUMENS:	2*2009 lm
CBCP:	2*10294 cd
EFFICACY:	69 lm/W



MODEL:	AMTN46-213E230SWT
BEAM ANGLE:	28°
POWER:	2*15W
LUMENS:	2*1327 lm
CBCP:	2*5429 cd
EFFICACY:	88 lm/W



MODEL:	AMTN46-218E230SWT
BEAM ANGLE:	28°
POWER:	2*21W
LUMENS:	2*1793 lm
CBCP:	2*7336 cd
EFFICACY:	85 lm/W

WAC Lighting
www.waclighting.com (US)
www.waclighting.net (International)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting Technology (Shanghai) Co, Ltd.
14, Lane 299, Bi Sheng Road, Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598


ULTRA - MODEL: AMTN46

WAC LIGHTING


4" Trimless Recessed Dual-head Downlight

PROJECT :


TYPE:




MODEL: AMTN46-225E230SWT
BEAM ANGLE: 28°
POWER: 2*29W
LUMENS: 2*2351 lm
CBCP: 2*9615 cd
EFFICACY: 81 lm/W




MODEL: AMTN46-213E330SWT
BEAM ANGLE: 36°
POWER: 2*15W
LUMENS: 2*1268 lm
CBCP: 2*2722 cd
EFFICACY: 85 lm/W




MODEL: AMTN46-218E330SWT
BEAM ANGLE: 36°
POWER: 2*21W
LUMENS: 2*1714 lm
CBCP: 2*3679 cd
EFFICACY: 82 lm/W




MODEL: AMTN46-225E330SWT
BEAM ANGLE: 36°
POWER: 2*29W
LUMENS: 2*2246 lm
CBCP: 2*4821 cd
EFFICACY: 77 lm/W




MODEL: AMTN46-213E530SWT
BEAM ANGLE: 50°
POWER: 2*15W
LUMENS: 2*1237 lm
CBCP: 2*1843 cd
EFFICACY: 82 lm/W



MODEL: AMTN46-218E530SWT
BEAM ANGLE: 50°
POWER: 2*21W
LUMENS: 2*1671 lm
CBCP: 2*2490 cd
EFFICACY: 80 lm/W



MODEL: AMTN46-225E530SWT
BEAM ANGLE: 50°
POWER: 2*29W
LUMENS: 2*2190 lm
CBCP: 2*3263 cd
EFFICACY: 76 lm/W



MODEL: AMTN46-208E530SWT
BEAM ANGLE: 8°
POWER: 2*10W
LUMENS: 2*375 lm
CBCP: 2*9280 cd
EFFICACY: 38 lm/W