


PROJECT :

TYPE :

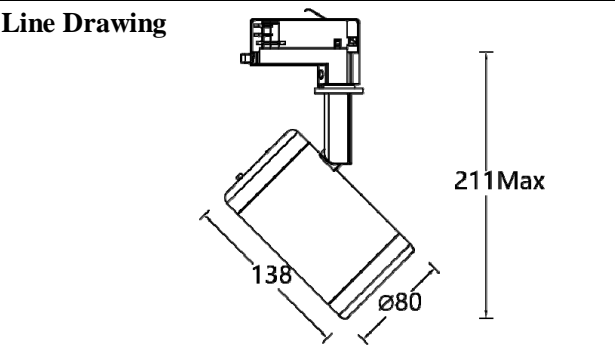

Product Description

The MERE series LED track spotlights have a modular design and are suitable for W track systems. The design of the lamp is exquisite, there is no visible radiator, and the lamp body is made of die-cast aluminum. With multi-particle HP LED light module, it can provide a rich beam Angle configuration, and more importantly, different beam Angle accessories can be changed by hand in the field, which can be used for key lighting or environmental lighting. The built-in light fixture has no strobe drive, and the dimming module can also be replaced in different ways on the spot, which is widely used in museums, art galleries, commercial Spaces, hotels, retail stores and other places.

Product Features

- Body Material: Aluminum alloy die-cast lamp body
- Optical System: Lens + reflector
- Finish: Electrostatic Powder coating, Black (BK), White (WT)
- Adjustable Angle: Horizontal 0 ~365 °, Vertical 0 ~90 °
- Accessories/Brackets: Refer to the accessories list, each type of accessories can only be added one
- Certification: CCC/CE
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20℃~40℃
- Net Weight: 0.9Kg without packing

Product Specifications

- LED Type: HP LED
- LED Power: 8W(4\*2W)/12W(4\*3W), built-in power shift
- Source Lm: 2700K: 770lm(8W)/1150lm(12W)  
3000K: 800lm(8W)/1200lm(12W)  
3500K: 820lm(8W)/1240lm(12W)  
4000K: 860lm(8W)/1300lm(12W)
- LED Lifetime: >50000h-L70 /B10-Ta25℃(LM-80/TM-21)
- CCT/CRI: 2700K/3000K/3500K/4000K, Ra90 or Ra97( > 95)
- SDCM: 2SDCM
- Input: 220V~240V AC/50Hz
- Dimming: On-board &0-10V, DALI(A match test is required)




















Order Model

Model	LED	Dimming	Beam	CRI	CCT	Finish
ATL36S MERE	LD08 LED 8W	D 0-10V&On-board	S 6° N 10° 1 15° 2 24° 3 36° 5 50° E 10*50° G 25*55° W Wash	9 90 A 97	27 2700K 30 3000K 35 3500K 40 4000K	WT White BK Black
	LD12 LED 12W	A DALI				
ATL36S	LD12	D	2	9	30	WT

Example : ATL36SLD12-D2930WT


PROJECT :

TYPE :

Accessories					
First class fittings	Lens "Angle S" ALENS-TL36-HSBK 	Lens "Angle N" ALENS-TL36-HNBK 	Lens "Angle 1" ALENS-TL36-H1BK 	Lens "Angle 2" ALENS-TL36-H2BK	Lens "Angle 3" ALENS-TL36-H3BK
	Lens "Angle 5" ALENS-TL36-H5BK 	Lens "Angle E" ALENS-TL36-HEBK 	Lens "Angle G" ALENS-TL36-HGBK 		
Second class fittings	Flat lens "wall washing" ALENS-TL36-WWWT 	Flat lens "stretching" ALENS-TL36-EEWT 	Flat lens "Weak mixed light " ALENS-TL36-SSWT 	Flat lens "Medium mixed light " ALENS-TL36-MMWT 	Flat lens "Strong mixed light " ALENS-TL36-LLWT 
Third class fittings	Filters "nostalgia" ALENS-TL36-HSWT 		Filters "identifiability" ALENS-TL36-RGWT 		Filters "preference" ALENS-TL36-PFWT 
Fourth class fittings	Rimmed honeycomb ALENS-TL36-HCM 		All black condenser      White outside and black inside condenser ALENS-TL36-SNOOT-B      ALENS-TL36-SNOOT-W 		
Fifth class fittings	Black four-leaf shade ALENS-TL36-BD-BK	White four-leaf shade ALENS-TL36-BD-WT 			
Sixth class fittings	On-board &0~10V Dimmer module (black) APART-TL36-D-BK	On-board &0~10V Dimming module (white) APART-TL36-D-WT 	DALI module APART-TL36-A-BK	Dimmer (Black) (White) DALI Dimmer Modul APART-TL36-A-WT 	

Note: Up to six types of accessories can be installed, and each type of accessories can be installed at most one at the same time

Track connection diagram

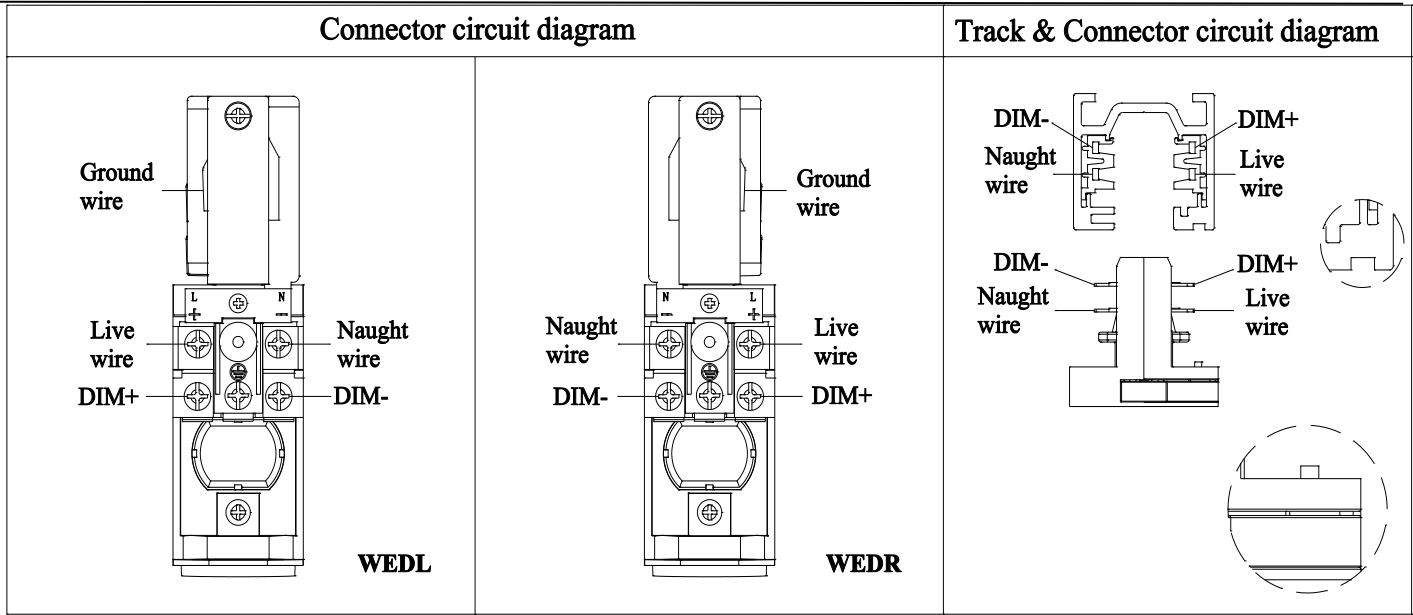


MERE- MODEL: ATL37SLD

W Track Luminaires

PROJECT :

TYPE :

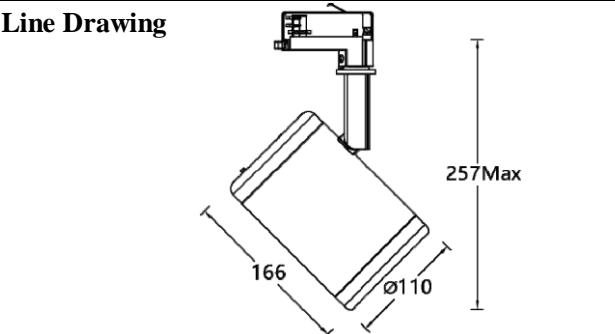

Product Description

The MERE series LED track spotlights have a modular design and are suitable for W track systems. The design of the lamp is exquisite, there is no visible radiator, and the lamp body is made of die-cast aluminum. With multi-particle HP LED light module, it can provide a rich beam Angle configuration, and more importantly, different beam Angle accessories can be changed by hand in the field, which can be used for key lighting or environmental lighting. The built-in light fixture has no strobe drive, and the dimming module can also be replaced in different ways on the spot, which is widely used in museums, art galleries, commercial Spaces, hotels, retail stores and other places.

Product Features

- Body Material: Aluminum alloy die-cast lamp body
- Optical System: Lens + reflector
- Finish: Electrostatic Powder coating, Black (BK), White (WT)
- Adjustable Angle: Horizontal 0 ~365 °, Vertical 0 ~90 °
- Accessories/Brackets: Refer to the accessories list, each type of accessories can only be added one
- Certification: CCC/CE
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20℃~40℃
- Net Weight: 0.1.8Kg without packing

Product Specifications

- LED Type: HP LED
- LED Power: 18W(9\*2W)/27W(9\*3W), built-in power shift
- Source Lm: 2700K: 1730lm(18W)/2580lm(27W)  
3000K: 1800lm(18W)/2700lm(27W)  
3500K: 1850lm(18W)/2780lm(27W)  
4000K: 1950lm(18W)/2950lm(27W)
- LED Lifetime: >50000h-L70 /B10-Ta25℃(LM-80/TM-21)
- CCT/CRI: 2700K/3000K/3500K/4000K, Ra90 or Ra97( > 95)
- SDCM: 2SDCM
- Input: 220V~240V AC/50Hz
- Dimming: On-board &0-10V, DALI(A match test is required)

Order Model

Model	LED	Dimming	Beam	CRI	CCT	Finish
ATL37S MERE	LD18 LED 18W LD27 LED 27W	D 0-10V&On-board A DALI	S 6° N 10° 1 15° 2 24° 3 36° 5 50° E 10*50° G 25*55° W Wash	9 90 A 97	27 2700K 30 3000K 35 3500K 40 4000K	WT White BK Black
ATL37S	LD27	D	2	9	30	WT

Example : ATL37SLD27-D2930WT




















MERE- MODEL: ATL37SLD

W Track Luminaires

WAC LIGHTING


PROJECT :

TYPE :

Accessories					
First class fittings	Lens "Angle S" <b>ALENS-TL37-HSBK</b> 	Lens "Angle N" <b>ALENS-TL37-HNBK</b> 	Lens "Angle 1" <b>ALENS-TL37-H1BK</b> 	Lens "Angle 2" <b>ALENS-TL37-H2BK</b>	Lens "Angle 3" <b>ALENS-TL37-H3BK</b>
	Lens "Angle 5" <b>ALENS-TL37-H5BK</b> 	Lens "Angle E" <b>ALENS-TL37-HEBK</b> 	Lens "Angle G" <b>ALENS-TL37-HGBK</b> 		
Second class fittings	Flat lens "wall washing" <b>ALENS-TL37-WWWT</b> 	Flat lens "stretching" <b>ALENS-TL37-EEWT</b> 	Flat lens "Weak mixed light " <b>ALENS-TL37-SSWT</b> 	Flat lens "Medium mixed light " <b>ALENS-TL37-MMWT</b> 	Flat lens "Strong mixed light " <b>ALENS-TL37-LLWT</b> 
Third class fittings	Filters "nostalgia" <b>ALENS-TL37-HSWT</b> 		Filters "identifiability" <b>ALENS-TL37-RGWT</b> 		Filters "preference" <b>ALENS-TL37-PFWT</b> 
Fourth class fittings	Rimmed honeycomb <b>ALENS-TL37-HCM</b> 		All black condenser      White outside and black inside condenser <b>ALENS-TL37-SNOOT-B</b> <b>ALENS-TL37-SNOOT-W</b> 		
Fifth class fittings	Black four-leaf shade <b>ALENS-TL37-BD-BK</b>	White four-leaf shade <b>ALENS-TL37-BD-WT</b> 			
Sixth class fittings	On-board &0~10V Dimmer module (black) <b>APART-TL37-D-BK</b>	On-board &0~10V Dimming module (white) <b>APART-TL37-D-WT</b> 	DALI Dimmer module      DALI Dimmer Module (Black)      (White) <b>APART-TL37-A-BK</b> <b>APART-TL37-A-WT</b> 		

Note: Up to six types of accessories can be installed, and each type of accessories can be installed at most one at the same time

Track connection diagram

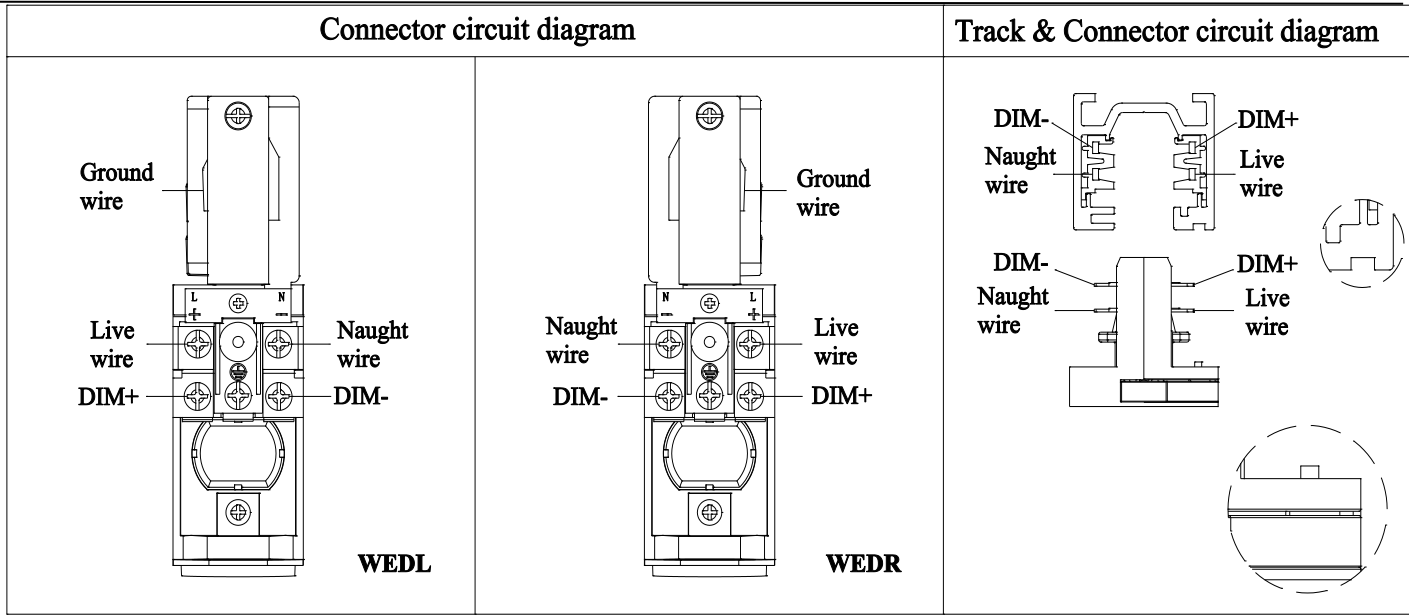

MERE- MODEL: ATL38SLD


W Track Luminaires

PROJECT :

TYPE :



Line Drawing



Product Description

The MERE series LED track spotlights have a modular design and are suitable for W track systems. The design of the lamp is exquisite, there is no visible radiator, and the lamp body is made of die-cast aluminum. With multi-particle HP LED light module, it can provide a rich beam Angle configuration, and more importantly, different beam Angle accessories can be changed by hand in the field, which can be used for key lighting or environmental lighting. The built-in light fixture has no strobe drive, and the dimming module can also be replaced in different ways on the spot, which is widely used in museums, art galleries, commercial Spaces, hotels, retail stores and other places.

Product Features

- Body Material: Aluminum alloy die-cast lamp body
- Optical System: Lens + reflector
- Finish: Electrostatic Powder coating, Black (BK), White (WT)
- Adjustable Angle: Horizontal 0°~365°; Vertical 0°~90°
- Accessories/Brackets: Refer to the accessories list, each type of accessories can only be added one
- Certification: CCC/CE
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C
- Net Weight: 0.1.8Kg without packing

Product Specifications

- LED Type: HP LED
- LED Power: 32W/48W, built-in power shift
- Source Lm: 2700K: 3080lm(18W)/4600lm(27W)  
3000K: 3200lm(18W)/4800lm(27W)  
3500K: 3280lm(18W)/4940lm(27W)  
4000K: 3400lm(18W)/5150lm(27W)
- LED Lifetime: >50000h-L70 /B10-Ta25°C (LM-80/TM-21)
- CCT/CRI: 2700K/3000K/3500K/4000K, Ra90 or Ra97( > 95)
- SDCM: 2SDCM
- Input: 220V~240V AC/50Hz
- Dimming: On-board & 0-10V, DALI(A match test is required)

Order Model

Model	LED	Dimming	Beam	CRI	CCT	Finish
ATL38S MERE	LD32 LED 32W	D 0-10V&On-board	S 6° N 10° 1 15° 2 24° 3 36° 5 50° E 10*50° G 25*55° W Wash	9 90 A 97	27 2700K 30 3000K 35 3500K 40 4000K	WT White BK Black
ATL38S	LD48	D	2	9	30	WT

Example : ATL38SLD48-D2930WT




















MERE- MODEL: ATL38SLD

WAC LIGHTING

W Track Luminaires

PROJECT :

TYPE :

Accessories					
First class fittings	Lens "Angle S" ALENS-TL38-HSBK 	Lens "Angle N" ALENS-TL38-HNBK 	Lens "Angle 1" ALENS-TL38-H1BK 	Lens "Angle 2" ALENS-TL38-H2BK	Lens "Angle 3" ALENS-TL38-H3BK
	Lens "Angle 5" ALENS-TL38-H5BK 	Lens "Angle E" ALENS-TL38-HEBK 	Lens "Angle G" ALENS-TL38-HGBK 		
Second class fittings	Flat lens "wall washing" ALENS-TL38-WWWT 	Flat lens "stretching" ALENS-TL38-EEWT 	Flat lens "Weak mixed light " ALENS-TL38-SSWT 	Flat lens "Medium mixed light " ALENS-TL38-MMWT 	Flat lens "Strong mixed light " ALENS-TL38-LLWT 
Third class fittings	Filters "nostalgia" ALENS-TL38-HSWT 		Filters "identifiability" ALENS-TL38-RGWT 		Filters "preference" ALENS-TL38-PFWT 
Fourth class fittings	Rimmed honeycomb ALENS-TL38-HCM 		All black condenser ALENS-TL38-SNOOT-B		White outside and black inside condenser ALENS-TL38-SNOOT-W 
Fifth class fittings	Black four-leaf shade ALENS-TL38-BD-BK	White four-leaf shade ALENS-TL38-BD-WT 			
Sixth class fittings	On-board &0~10V Dimmer module (black) APART-TL38-D-BK	On-board &0~10V Dimming module (white) APART-TL38-D-WT 	DALI Dimmer module (Black) APART-TL38-A-BK	DALI Dimmer Module (White) APART-TL38-A-WT 	

Note: Up to six types of accessories can be installed, and each type of accessories can be installed at most one at the same time

Track connection diagram

