

FUEGO COMPACT - MODEL: AEIR5TA

In-ground Luminaires

WAC LIGHTING


PROJECT:

TYPE:

Product Image



Line Drawing

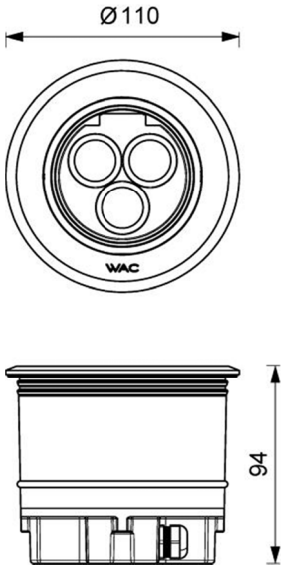

Product Description

FUEGO Compact adopts high-quality stainless steel for the face frame, aluminum die-casting and high temperature powder coating for the body. Suitable for outdoor environments, IP67 protection, IK10 anti-impact rating, anti-pressure 1500kg, high transmittance lens + patented anti-glare system. With the design of pre-buried cylinder, it is convenient for installation and maintenance. Applied to residential areas, such as parks, plazas, shopping centers as well as applied to facade lighting.

Product Features

- Body Material: Aluminum alloy die-casting + Stainless steel frame
- Optical System: Lens
- Finish: Static electricity powder coating
- Adjustable Angle: 0°~15°
- Accessories: /
- Certification: CCC
- IP Rating: IP67,IK10
- Insulation Level: Class I
- Operating Temperature: -20°C~50°C

Product Specifications

- LED Type : HIGH POWER
- LED Power: 6.3W Max
- Source Lm: 3000K 660lm
- LED Lifetime: >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K, 3000K ,4000K, Ra80
- SDCM: 3 SDCM
- Input: 220V AC/50Hz
- Dimming: ON-OFF
- Net Weight: 0.8Kg without packing

Order Model

Model	Comment	Power (W)	LEDs (quantity)	Max Lumens (lm)	Control Systems	Beam	CCT	Finish
AEIR5T	A Adjustable	06 6W(Max)	3	455	EL ON-OFF 220V AC Power Supply	S 6°	27 2700K	SS Stainless Steel
						1 13°	30 3000K	
						2 20°	3000K	
						3 30°	40 4000K	

Example: AEIR5TA-06EL127SS

FUEGO COMPACT - MODEL: AEIR6TA


In-ground Luminares

WAC LIGHTING


PROJECT:

TYPE:


Accessory

Item	Description	Pic	Description Dimensions
AEIR5TF-RC001	Recessed Casing		


LIGHT DISTRIBUTION@3000K LUMINAIRE DATA




MODEL:	AEIR5TA-06ELS30SSS
BEAM	
ANGLE:	6.4
POWER:	8.3W
LUMENS:	451 lm
CBCP:	/
EFFICACY:	54 lm /W



MODEL:	AEIR5TA-06EL130SS
BEAM	
ANGLE:	13.5
POWER:	8.3W
LUMENS:	455.4 lm
CBCP:	/
EFFICACY:	55 lm /W



MODEL:	AEIR5TA-06EL230SSS
BEAM	
ANGLE:	20.1
POWER:	8.3W
LUMENS:	439 lm
CBCP:	/
EFFICACY:	53 lm /W



MODEL:	AEIR5TA-06EL330SS
BEAM ANGLE:	29.8
POWER:	8.3 W
LUMENS:	429 lm
CBCP:	/
EFFICACY:	52 lm /W


FUEGO COMPACT - MODEL: AEIR6TA

WAC LIGHTING

In-ground Luminaires

PROJECT:

TYPE:

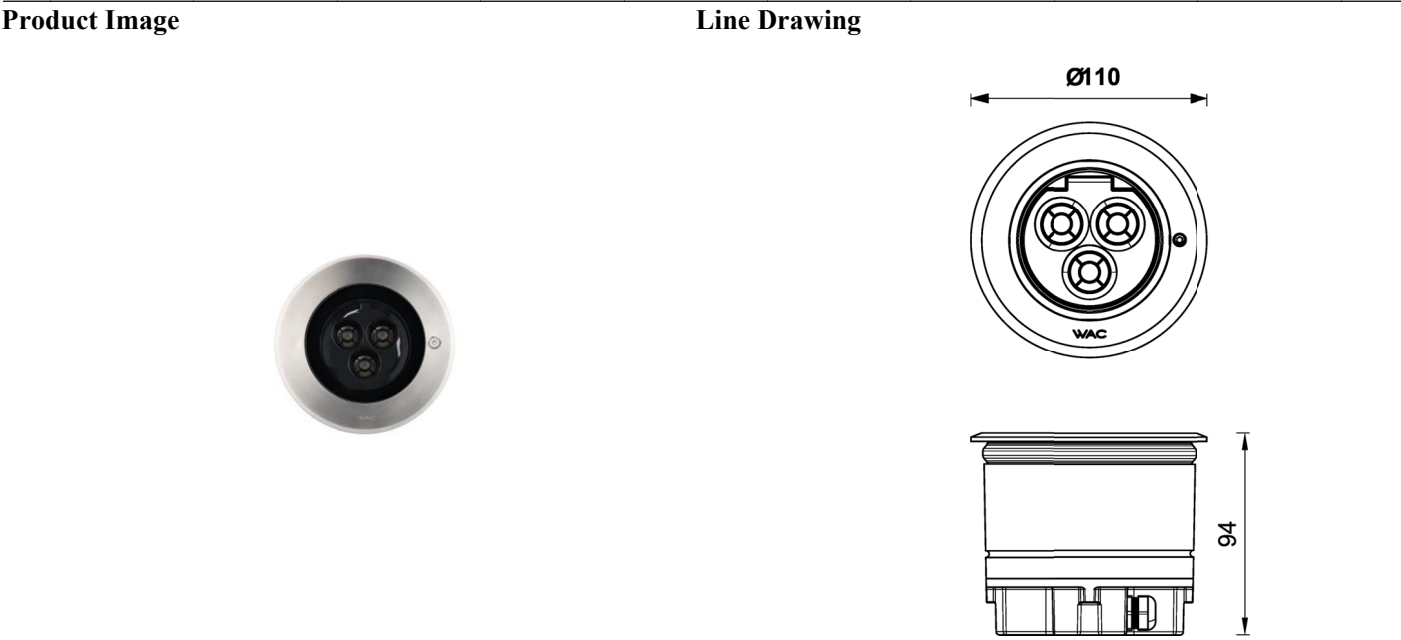

Product Description

FUEGO Compact adopts high-quality stainless steel for the face frame, aluminum die-casting and high temperature powder coating for the body. Suitable for outdoor environments, IP67 protection, IK10 anti-impact rating, anti-pressure 1500kg, high transmittance lens + patented anti-glare system. With the design of pre-buried cylinder, it is convenient for installation and maintenance. Applied to residential areas, such as parks, plazas, shopping centers as well as applied to facade lighting.

Product Features

- Body Material:

Aluminum alloy die-casting + Stainless steel frame
- Optical System:

Lens
- Finish:

Static electricity powder coating
- Adjustable Angle:

0°~15°
- Accessories:

/
- Certification:

CCC
- IP Rating:

IP67, IK10
- Insulation Level:

Class I
- Operating Temperature:

-20°C~50°C

Product Specifications

- LED Type :

HIGH POWER
- LED Power:

6.3W Max
- Source Lm:

3000K 660lm
- LED Lifetime:

>50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- CCT/CRI:

2700K, 3000K ,4000K, Ra80
- SDCM:

3 SDCM
- Input::

220V AC/50Hz
- Dimming:

ON-OFF
- Net Weight:

0.8Kg without packing

Order Model

Model	Comment	Power (W)	LEDs (quantity)	Max Lumens (lm)	Control Systems	Beam	CCT	Finish
AEIR6T Super Comfort	A Adjustable	06 6W(Max)	3	349	EL ON-OFF 220V AC Power Supply	S 6°	27 2700K	SS Stainless Steel
						1 13°	30 3000K	
						2 20°	30 3000K	
						3 30°	40 4000K	

Example: AEIR6TA-06EL127SS

FUEGO COMPACT - MODEL: AEIR6TA


In-ground Luminaires

WAC LIGHTING


PROJECT:

TYPE:


Accessory

Item	Description	Pic	Description Dimensions
AEIR5TF-RC001	Recessed Casing		


LIGHT DISTRIBUTION@3000K LUMINAIRE DATA




MODEL:	AEIR6TA-06ELS30SS
BEAM	
ANGLE:	6°
POWER:	8.3W
LUMENS:	349 lm
CBCP:	/
EFFICACY:	42 lm /W



MODEL:	AEIR6TA-06EL130SS
BEAM	
ANGLE:	12.6°
POWER:	8.3W
LUMENS:	281 lm
CBCP:	/
EFFICACY:	33.5 lm /W



MODEL:	AEIR6TA-06EL230SS
BEAM	
ANGLE:	18.8°
POWER:	8.3W
LUMENS:	231 lm
CBCP:	/
EFFICACY:	33.5 lm /W



MODEL:	AEIR6TA-06EL330SS
BEAM	
ANGLE:	12.6°
POWER:	8.3 W
LUMENS:	291 lm
CBCP:	/
EFFICACY:	35 lm /W