

FUEGO COMPACT- MODEL: AEIR5M

In-ground Luminaires

WAC LIGHTING


Project Name:

Type:

Product Image



Line Drawing

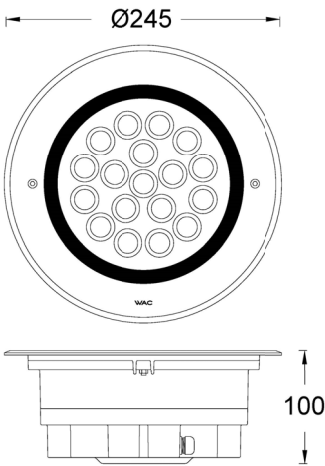

Product Description

FUEGO Compact adopts high quality 316 stainless steel for the face frame, aluminum die-casting and high temperature powder coating for the body. Suitable for outdoor environments, IP68 protection, IK10 anti-impact rating, anti-pressure 2000kg, high transmittance lens + patented anti-glare system. With the design of pre-buried cylinder, it is convenient for installation and maintenance. Applied to residential areas, such as parks, plazas, shopping centers as well as applied to facade lighting.

Product Features

- Body Material: Stainless steel frame+ aluminum die-casting lamp body
- Optical System: Lens+SUBROSA ® Hidden light system
- Finish: Electrostatic powder coating
- Adjustable Angle: /
- Accessories: /
- Certification: CCC
- IP Rating: IK10, IP68(Not suitable for permanent under water installation)
- Insulation Level: Class I
- Operating Temperature: -20°C~50°C

Product Specifications

- LED Type: High Power LED
- LED Power: 33W Max
- Source Lm: 3000K 2800lm;
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K/ 3000K/4000K, Ra80
- SDCM: 3 SDCM
- Input: 220V AC / 50Hz
- Dimming: On-off
- Net Weight: 3.53Kg without packing

Order Model

Model	Comment	Power (W)	LEDs (quantity)	Max Lumens (lm)	Control	Systems	Beam	CCT	Finish
AEIR5M High Lumens	F Frame	33 33(Max)	18	2500	EL	ON-OFF 220V AC Power Supply	S 7° 1 14°	27 2700K 30 3000K	SS Stainles s Steel
		27 27(Max)	18	2045	ML	DMX512 Dimming 220V AC Power Supply	2 20° 3 30°	40 4000K	

Example: AEIR5MF-33ELS27SS

WAC Lighting
www.waclighting.com (US)
www.waclighting.net (International)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting Technology (Shanghai) Co., Ltd
14, Lane 299, Bi Sheng Road, Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

FUEGO COMPACT- MODEL: AEIR5M


In-ground Luminares

WAC LIGHTING


Project Name:

Type:


Accessories

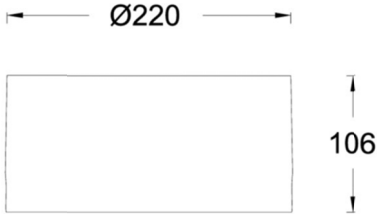Item	Description	Pic	Description Dimensions
AEIR5MF-RC001	Recessed Casing		


LIGHT DISTRIBUTION@3000K LUMINAIRE DATA




MODEL:	AEIR5MF-33ELS30SS
BEAM ANGLE:	7°
POWER:	38.67W
LUMENS:	2427 lm
CBCP:	/
EFFICACY:	62.78 lm /W



MODEL:	AEIR5MF-33EL130SS
BEAM ANGLE:	14°
POWER:	44W
LUMENS:	2368 lm
CBCP:	/
EFFICACY:	62.4 lm /W



MODEL:	AEIR5MF-33EL230SS
BEAM ANGLE:	20°
POWER:	38.7W
LUMENS:	2500 lm
CBCP:	/
EFFICACY:	64.64 lm /W



MODEL:	AEIR5MF-33EL330SS
BEAM ANGLE:	30°
POWER:	37.8 W
LUMENS:	2268 lm
CBCP:	/
EFFICACY:	60 lm /W


FUEGO COMPACT- MODEL: AEIR6M

In-ground Luminaires

WAC LIGHTING

Project Name:

Type:

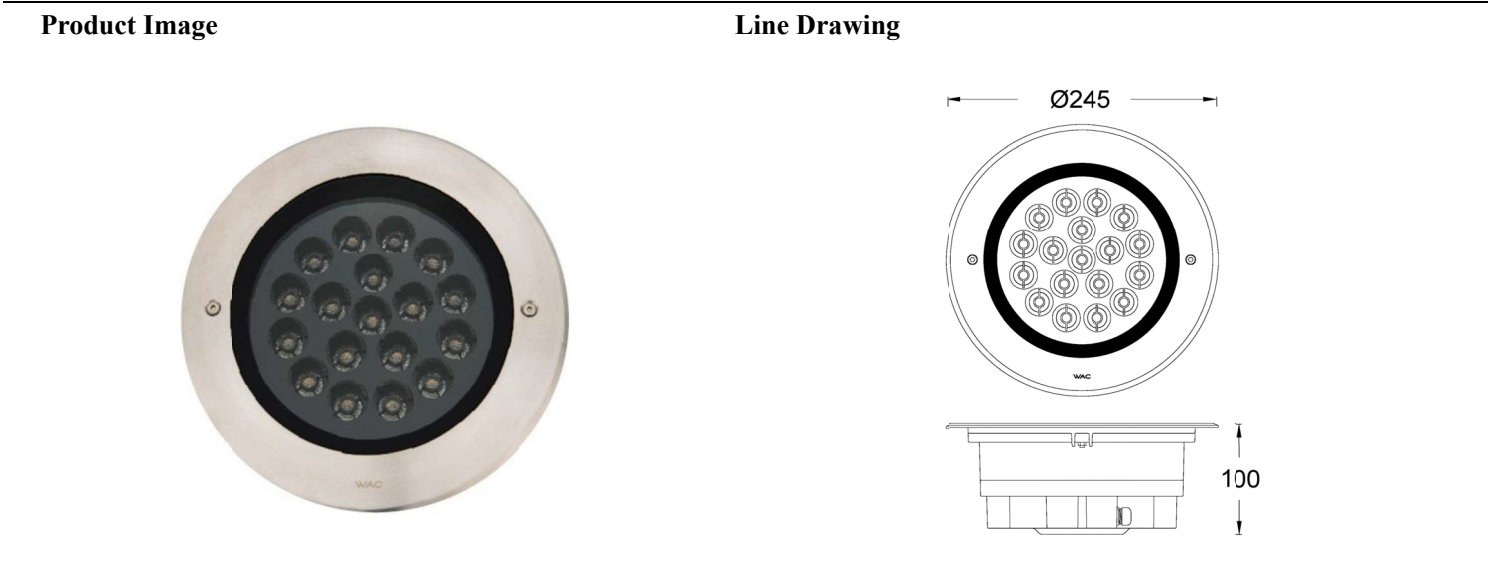

Product Description

FUEGO Compact adopts high quality 316 stainless steel for the face frame, aluminum die-casting and high temperature powder coating for the body. Suitable for outdoor environments, IP68 protection, IK10 anti-impact rating, anti-pressure 2000kg, high transmittance lens + patented anti-glare system. With the design of pre-buried cylinder, it is convenient for installation and maintenance. Applied to residential areas, such as parks, plazas, shopping centers as well as applied to facade lighting.

Product Features

- Body Material: Stainless steel frame+ aluminum die-casting lamp body
- Optical System: Lens+SUBROSA ® Hidden light system
- Finish: Electrostatic powder coating
- Adjustable Angle: /
- Accessories: /
- Certification: CCC
- IP Rating: IK10, IP68(Not suitable for permanent under water installation)
- Insulation Level: Class I
- Operating Temperature: -20°C~50°C

Product Specifications

- LED Type: High Power LED
- LED Power: 33W Max
- Source Lm: 3000K 2800lm;
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K/ 3000K/4000K, Ra80
- SDCM: 3 SDCM
- Input: 220V AC / 50Hz
- Dimming: On-off
- Net Weight: 3.53Kg without packing

Order Model

Model	Comment	Power (W)	LEDs (quantity)	Max Lumens (lm)	Control Systems	Beam	CCT	Finish
AEIR6M Super Comfort	F Frame	33 33(Max)	18	1607	EL ON-OFF 220V AC Power Supply	S 7° 1 13°	27 2700K	SS Stainless Steel
		27 27(Max)	18	1315	ML DMX512 Dimming 220V AC Power Supply	2 20° 3 30°	30 3000K 40 4000K	

Example: AEIR6MF-33ELS27SS

FUEGO COMPACT- MODEL: AEIR6M

In-ground Luminares

WAC LIGHTING


Project Name:

Type:


Accessories

Item	Description	Pic	Description Dimensions
AEIR5MF-RC001	Recessed Casing		


LIGHT DISTRIBUTION@3000K LUMINAIRE DATA




MODEL:	AEIR6MF-33ELS30SS
BEAM ANGLE:	6.9°
POWER:	37.84W
LUMENS:	1607 lm
CBCP:	/
EFFICACY:	42.46 lm /W



MODEL:	AEIR6MF-33EL130SS
BEAM ANGLE:	13.2°
POWER:	37.8W
LUMENS:	1400 lm
CBCP:	/
EFFICACY:	37 lm /W



MODEL:	AEIR6MF-33EL230SS
BEAM ANGLE:	18.8°
POWER:	38.65W
LUMENS:	1410 lm
CBCP:	/
EFFICACY:	36.49 lm /W



MODEL:	AEIR6MF-33EL330SS
BEAM ANGLE:	30°
POWER:	37.84 W
LUMENS:	1375 lm
CBCP:	/
EFFICACY:	36.35 lm /W