


FUEGO PRO LINEAR - MODEL: AEIL4

WAC LIGHTING

In-ground Luminaires

Project Name:

Type:

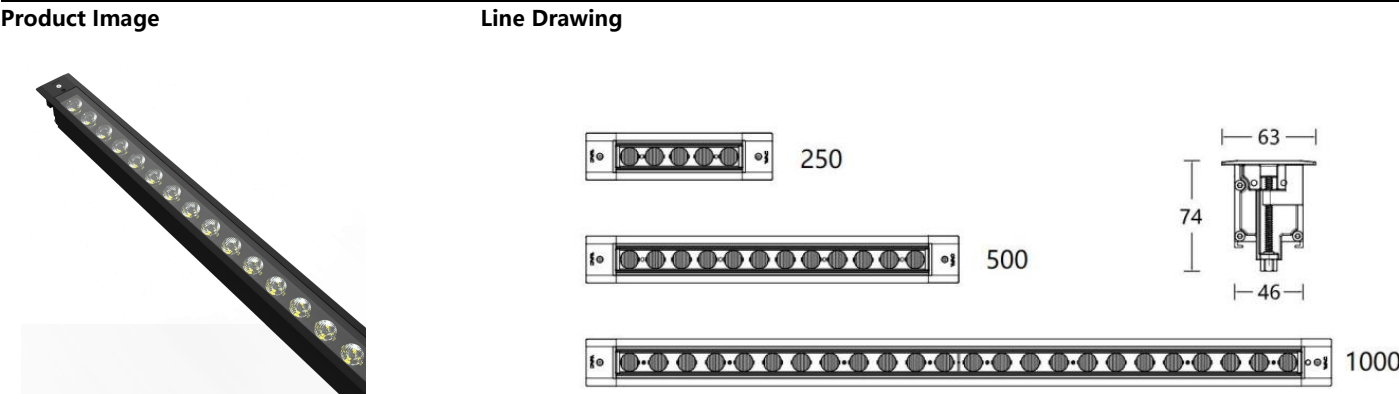

Product Description

The Fuego Pro series of underground lights are suitable for outdoor applications. Perfectly recessed installation, good light consistency, special structure design, effectively balancing the internal and external air pressure, to prevent condensation. Built-in anti-glare fittings with 33° cut-off angle. Designed with pre-embedded parts, convenient for customers to install and maintain. Patented surface angle adjustment function, rich application scenarios. Applicable to neighborhoods, hotels, squares, parks and courtyards.

Product Features

- Body Material:** Aluminum Extruded Body + Aluminum Die-Cast End Cap
- Optical System:** Lens
- Finish:** Electrostatic Powder Coating
- Adjusting Angle:** 0° ~ -15°
- Accessory:** Embedded part
- Certification:** CQC
- IP Rating:** IP67 / IK10 (Load capacity 2000Kg)
- Insulation Level:** Class III
- Operating Temperature:** -20°C~50°C

Product Specifications

- LED Type:** High Power
- Power:** 56W Max Fixed ,40Max Adjusting / 1000mm
- Source Lm:** 2700K 5600lm, 3000K 5880lm, 4000K6160lm
- LED Lifetime:** >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI:** 2700K, 3000K ,4000K / Ra80
- SDCM:** 3 SDCM
- Input:** 24V DC
- Dimming:** ON-OFF or DMX512 dimming control
- Net Weight:** Approx. 3.1Kg /M, excluding packaging

Order Model

Model	Length	Comment	Power	Max		Control Systems	Beam	CCT	Finish
				LEDs	Lumens				
AEIL403	250	F Fixed	12 12W	5	653	ET ON-OFF 24V DC Power Supply MT DMX512 Dimming 24V DC Power Supply	S 8° 1 15° 3 30° 4 40° E 9°X15° G 10°X50° W WALL WASHER	27 2700K 30 3000K 40 4000K	BK Black
AEIL405	500		28 28W	12	1953				
AEIL410	1000		56 56W	24	3956				

Example: AEIL403F-12ETS30BK

FUEGO PRO LINEAR - MODEL: AEIL4

WAC LIGHTING

In-ground Luminaires




Project Name:

Type:

Model	Length	Comment	Power	Max		Control Systems	Beam	CCT	Finish
				LEDs	Lumens				
AEIL403	250	A Adjustable	08 8W	5	553	ET ON-OFF 24V DC Power Supply MT DMX512 Dimming 24V/DC Power Supply	S 8° 1 15° 3 30° 4 40° E 9°X15° G 10°X50° W WALL WASHER	27 2700K 30 3000K 40 4000K	BK Black
AEIL405	500		20 20W	12	1654				
AEIL410	1000		40 40W	24	3350				

Eample: AEIL403A-08ETS30BK

Accessory

Item	Description	Pic	
AEIL4-RC025	Recessed casing 250mm		
AEIL1-RC050	Recessed casing 500mm		
AEIL1-RC100	Recessed casing 1000mm		
AEIL4-GH025	Grilling Horizontal 250mm		Can only be used on fixed upward light-emitting plates
AEIL4-GH050	Grilling Horizontal 500mm		
AEIL4-GH100	Grilling Horizontal 1000mm		
AEIL4-HC025	Honeycomb 250mm		Can only be used on fixed upward light-emitting plates
AEIL4-HC050	Honeycomb 500mm		
AEIL4-HC100	Honeycomb 1000mm		
	Signal connector		Used for signal connection between two lights. The length is according to the distance of the pre-embedded box between two lights + 400mm (should be ordered according to the actual situation)
AELC3-SC-CT002F	Female signal connector		
AELC3-SC-CT002M	Male signal connector		


FUEGO PRO LINEAR - MODEL: AEIL4

WAC LIGHTING

In-ground Luminaires

Project Name:

Type:

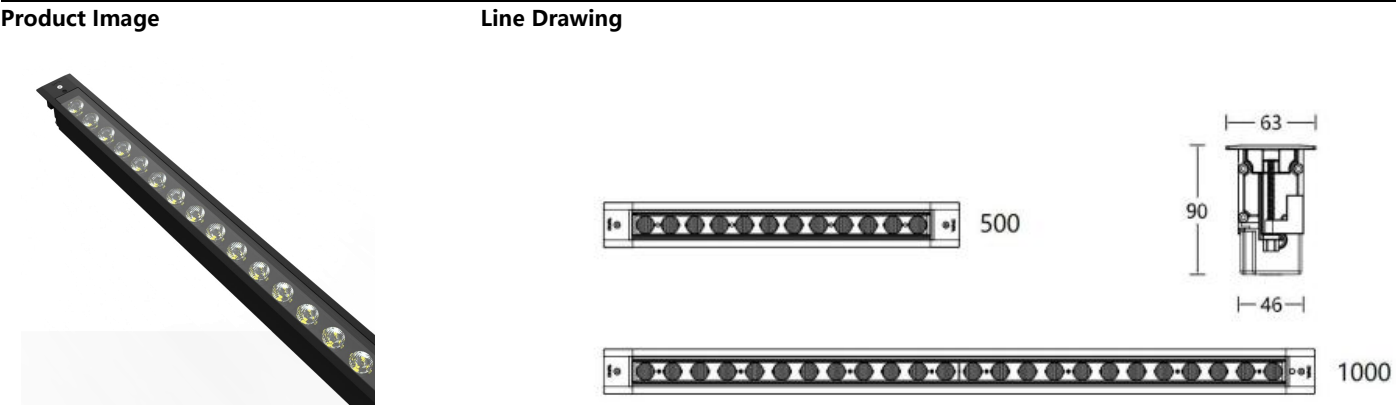

Product Description

The Fuego Pro series of underground lights are suitable for outdoor applications. Perfectly recessed installation, good light consistency, special structure design, effectively balancing the internal and external air pressure, to prevent condensation. Built-in anti-glare fittings with 33° cut-off angle. Designed with pre-embedded parts, convenient for customers to install and maintain. Patented surface angle adjustment function, rich application scenarios. Applicable to neighborhoods, hotels, squares, parks and courtyards.

Product Features

- Body Material:** Aluminum Extruded Body + Aluminum Die-Cast End Cap
- Optical System:** Lens
- Finish:** Electrostatic Powder Coating
- Adjusting Angle:** 0° ~ -15°
- Accessory:** Embedded part
- Certification:** CQC
- IP Rating:** IP67 / IK10 (Load capacity 2000Kg)
- Insulation Level:** Class III
- Operating Temperature:** -20℃~50℃

Order Model

Product Specifications

- LED Type:** High Power
- Power:** 56W Max Fixed, 40Max Adjusting / 1000mm
- Source Lm:** 2700K, 3000K 3864lm , 4000K 6160lm
- LED Lifetime:** >50000h-L70 /B10-Ta25℃(LM-80/TM-21)
- CCT/CRI:** 2700K, 3000K ,4000K / Ra80
- SDCM:** 3 SDCM
- Input:** 220V AC
- Dimming:** ON-OFF or DMX512 dimming control
- Net Weight:** Approx. 3.8Kg /M, excluding packaging

Model	Length	Comment	Power	LEDs	Max Lumens	Control Systems	Beam	CCT	Finish
AEIL405	500	F Fixed	28 28W	12	1953	EL ON-OFF 220V AC Power Supply	S 8° 1 15° 3 30° 4 40°	27 2700K 30 3000K	BK Black
AEIL410	1000		56 56W	24	3956	ML DMX512 Dimming 220V AC Power Supply	E 9°X15° G 10°X50° W WALL WASHER	40 4000K	

Example: AEIL403F-12ELS30BK

FUEGO PRO LINEAR - MODEL: AEIL4

WAC LIGHTING

In-ground Luminaires




Project Name:

Type:

Model	Length	Comment	Power	LEDs	Max Lumens	Control Systems	Beam	CCT	Finish
AEIL405	500	A Adjustable	20 20W	12	1654	EL ON-OFF 220V AC Power Supply	S 8° 1 15° 3 30° 4 40°	27 2700K 30 3000K	BK Black
AEIL410	1000		40 40W	24	3350	ML DMX512 Dimming 220V AC Power Supply	E 9°X15° G 10°X50° W WALL WASHER	40 4000K	

Example: AEIL403A-08ELS30BK

Accessory

Item	Description	Pic	
AEIL1-RC050	Recessed casing 500mm		
AEIL1-RC100	Recessed casing 1000mm		
AEIL4-GH050	Grilling Horizontal 500mm		Can only be used on fixed upward light-emitting plates
AEIL4-GH100	Grilling Horizontal 1000mm		
AEIL4-HC025	Honeycomb 250mm		Can only be used on fixed upward light-emitting plates
AEIL4-HC050	Honeycomb 500mm		
AEIL4-HC100	Honeycomb 1000mm		
	Signal connector		Used for signal connection between two lights. The length is according to the distance of the pre-embedded box between two lights + 400mm (should be ordered according to the actual situation)
AELC3-SC-CT002F	Female signal connector		
AELC3-SC-CT002M	Male signal connector		

FUEGO PRO LINEAR - MODEL: AEIL4


In-ground Luminaires

WAC LIGHTING


Project Name:

Type:


Light Curve Distribution @3000K Data




MODEL:	AEIL410F-56ETS30BK
BEAM ANGLE:	8°
POWER:	60.7W
LUMENS:	3124 lm
CBCP:	/
EFFICACY:	51.4 lm /W




MODEL:	AEIL410F-56ET130BK
BEAM ANGLE:	15°
POWER:	61W
LUMENS:	2930 lm
CBCP:	/
EFFICACY:	48.1 lm /W




MODEL:	AEIL410F-56ET330BK
BEAM ANGLE:	30°
POWER:	61W
LUMENS:	3052 lm
CBCP:	/
EFFICACY:	50 lm /W




MODEL:	AEIL410F-56ET430BK
BEAM ANGLE:	40°
POWER:	61 W
LUMENS:	2952 lm
CBCP:	/
EFFICACY:	48.4 lm /W




MODEL:	AEIL410F-56ETE30BK
BEAM ANGLE:	9°X15°
POWER:	61W
LUMENS:	3383 lm
CBCP:	/
EFFICACY:	55.5 lm /W



MODEL:	AEIL410F-56ETG30BK
BEAM ANGLE:	10°X50°
POWER:	61 W
LUMENS:	2949 lm
CBCP:	/
EFFICACY:	48.5 lm /W



MODEL:	AEIL410F-56ETW30BK
BEAM ANGLE:	WALL WASHER
POWER:	64W
LUMENS:	2867 lm
CBCP:	/
EFFICACY:	44.8 lm /W



MODEL:	AEIL410A-40ETS30BK
BEAM ANGLE:	8°
POWER:	46 W
LUMENS:	3339 lm
CBCP:	/
EFFICACY:	72.9 lm /W


FUEGO PRO LINEAR - MODEL: AEIL4

In-ground Luminaires


WAC LIGHTING

Project Name:


Type:




MODEL:	AEIL410A-40ET130BK
BEAM ANGLE:	15°
POWER:	46 W
LUMENS:	2879 lm
CBCP:	/
EFFICACY:	62.9 lm /W




MODEL:	AEIL410A-40ET330BK
BEAM ANGLE:	30°
POWER:	46 W
LUMENS:	2912 lm
CBCP:	/
EFFICACY:	63.3 lm /W




MODEL:	AEIL410A-40ET430BK
BEAM ANGLE:	40°
POWER:	46 W
LUMENS:	3046 lm
CBCP:	/
EFFICACY:	66.5 lm /W



MODEL:	AEIL410A-40ETE30BK
BEAM ANGLE:	9°X15°
POWER:	46 W
LUMENS:	3195 lm
CBCP:	/
EFFICACY:	69.8 lm /W



MODEL:	AEIL410A-40ETG30BK
BEAM ANGLE:	10°X50°
POWER:	46 W
LUMENS:	2781 lm
CBCP:	/
EFFICACY:	60.8 lm /W



MODEL:	AEIL410A-40ETW30BK
BEAM ANGLE:	WALL WASHER
POWER:	46 W
LUMENS:	2802 lm
CBCP:	/
EFFICACY:	61.2 lm /W