

PANTHER- MODEL: AEP1TI

Spot Luminaires


Project Name:

Type:

Product Image



Line Drawing

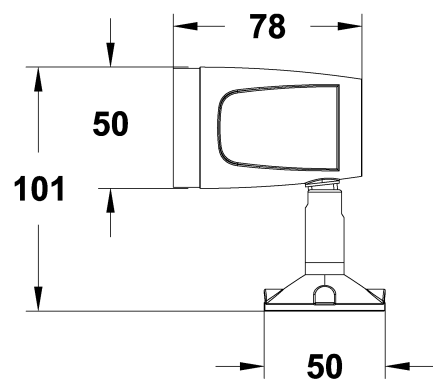

Product Description

The PANTHER Series is the professional LED floodlight designed by WAC for high-end outdoor lighting venues, featuring WAC's patented design for a perfect, clean profile that incorporates aerodynamic principles to utilize efficient heat dissipation and prolong the life of the LED fixtures. The PANTHER Series luminaires are available in a wide range of sizes and with the latest LED technology, and can be precisely adjusted vertically and horizontally. Precisely adjustable rotation both vertically and horizontally. Applications include architectural facades or landscape projections.

Product Features

- Body Materials:** Aluminum die-casting lamp body
- Optical System:** Lens + W-Module Module
- Finishes:** Electrostatic Powder Coating
- Objection Direction:** Vertical up 90°, Down 30°, Horizontal 0-330°
- Accessory/Bracket:** Anti-glare Cover, Tensile Glass Frame, Hoop, Ground Insert
- Certification:** CQC
- IP Rating:** IP65
- Insulation Level:** Class III
- Operating Temperature:** -20℃~50℃

Product Specifications

- **LED Type:** High Power
- **Source Power:** 2.2W (Max)
- **Source Lm:** 3000K 166lm; 4000K 171lm
- **LED Lifetime:** >50000h-L70 / B10-Ta25°C(LM-80 / TM-21)
- **CCT/CRI:** 3000K, Ra80 / 4000K, Ra80
- **SDCM:** 3 SDCM
- **Input Voltage:** 24V/DC
- **Dimming:** ON-OFF Or DMX512
- **Net Weight:** Approx. 0.75Kg, excluding packaging

Order Model

Model	Power (W)	LEDs (quantity)	Max Lumens (lm) 3000K	Control Systems	Beam	CCT	Finish
AEP1TI-03	3(Max)	1	159	ET ON-OFF 24V DC Power Supply MT DMX512 Dimming 24V DC Power Supply	S 7° 1 13° 3 30° 4 40°	30 3000K 40 4000K	BK Black

Example: AEP1TI-03ETS30BK

WAC Lighting

www.waclighting.com (US)
www.waclighting.com(International)

Headquarters

44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)

14,Lane 299, Bi Sheng Road,Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

PANTHER- MODEL: AEP1TI

Spot Luminaires

WAC LIGHTING


Project Name:

Type:


Accessory

ITEM	Abbreviate	PIC	Micro
Wall Washer Visor	WW		AEP1TI-WW1-BK
Support for Pole	SPL		AEP1TI-SPL-BK
Stainless plate with Spike (Round base)	SPK		AEP1TI-SPK-BK


Light Distribution @3000K data




MODEL:	AEP1TI-03ETS40BK
BEAM ANGLE:	7°
POWER:	3.1W
LUMENS:	156.6lm
CBCP:	/
EFFICACY:	51lm/W



MODEL:	AEP1TI-03ET140BK
BEAM ANGLE:	13°
POWER:	3.1W
LUMENS:	157lm
CBCP:	/
EFFICACY:	51lm/W



MODEL:	AEP1TI-03ET340BK
BEAM ANGLE:	30°
POWER:	3.1W
LUMENS:	159.4lm
CBCP:	/
EFFICACY:	51lm/W



MODEL:	AEP1TI-03ET440BK
BEAM ANGLE:	40°
POWER:	3.1W
LUMENS:	144lm
CBCP:	/
EFFICACY:	46lm/W

WAC Lighting
www.waclighting.com (US)
www.waclighting.com(International)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)
14,Lane 299, Bi Sheng Road,Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

PANTHER- MODEL: AEP1NI

Spot Luminaires


Project Name:

Type:

Product Image



Line Drawing

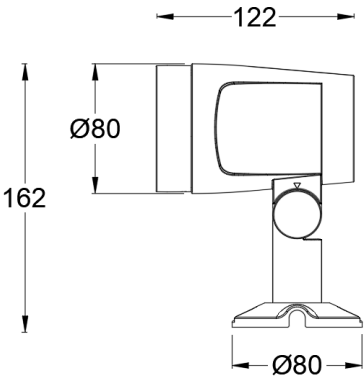

Product Description

The PANTHER Series is the professional LED floodlight designed by WAC for high-end outdoor lighting venues, featuring WAC's patented design for a perfect, clean profile that incorporates aerodynamic principles to utilize efficient heat dissipation and prolong the life of the LED fixtures. The PANTHER Series luminaires are available in a wide range of sizes and with the latest LED technology, and can be precisely adjusted vertically and horizontally. Precisely adjustable rotation both vertically and horizontally. Applications include architectural facades or landscape projections.

Product Features

- Body Materials:** Aluminum die-casting lamp body
- Optical System:** Lens + SUBROSA® Invisible Optical System
- Finishes:** Electrostatic Powder Coating
- Objection Direction:** Vertical up 90°, Down 30°, Horizontal 0-330°
- Accessory/Bracket:** Anti-glare Cover, Tensile Glass Frame, Hoop, Ground Insert
- Certification:** CCC
- IP Rating:** IP65
- Insulation Level:** Class I
- Operating Temperature:** -20 C ~50 C

Product Specifications

- **LED Type:** High Power
- **Source Power:** 8W (Max)
- **Source Lm:** 2700K 800lm; 3000K 840lm; 4000K 880lm
- **LED Lifetime:** >50000h-L70 / B10-Ta25°C(LM-80 / TM-21)
- **CCT/CRI:** 2700K, 3000K, 4000K, Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V AC
- **Dimming:** ON-OFF/DMX512 Dimming
- **Net Weight:** Approx. 1.0Kg, excluding packaging

Order Model

Model	Power (W)	LEDs(quantity)	Max Lumens (lm)3000K	Control Systems	Beam	CCT	Finish
AEP1NI-08	8(MAX)	3	441	EL ON-OFF 220V AC Power Supply ML DMX512 Dimming 220V AC Power Supply	S 6° 1 13° 2 22° 3 34° 5 50°	27 2700K 30 3000K 40 4000K	BK Black

Example: AEP1NI-08ELS30BK

WAC Lighting
www.waclighting.com (US)
www.waclighting.com(International)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)
14,Lane 299, Bi Sheng Road,Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

PANTHER- MODEL: AEP1NI

Spot Luminaires

WAC LIGHTING


Project Name:

Type:


Accessory

ITEM	Abbreviate	PIC	Mini
Wall Washer Visor	WW		AEP1NL-WW1-BK
Beam Elongated Lens/Horizontal Direction	BEL1		AEP1NL-BEL1-BK
Beam Elongated Lens / Vertical Direction	BEL2		AEP1NL-BEL2-BK
Support for Pole	SPL		AEP1SL-SPL-BK
Stainless plate with Spike (Round base)	SPK		AEP1NI-SPK-BK


Light Distribution @3000K Data




MODEL:	AEP1NI-08ELS30BK
BEAM ANGLE:	6°
POWER:	9.2W
LUMENS:	441lm
CBCP:	/
EFFICACY:	47.9lm/W




MODEL:	AEP1NI-08EL130BK
BEAM ANGLE:	13°
POWER:	9.2W
LUMENS:	331lm
CBCP:	/
EFFICACY:	36.2lm/W



MODEL:	AEP1NI-08EL230BK
BEAM ANGLE:	22°
POWER:	9.2W
LUMENS:	346lm
CBCP:	/
EFFICACY:	37.8lm/W



MODEL:	AEP1NI-08EL330BK
BEAM ANGLE:	34°
POWER:	9.2W
LUMENS:	427lm
CBCP:	/
EFFICACY:	46.6lm/W



MODEL:	AEP1NI-08EL530BK
BEAM ANGLE:	50°
POWER:	9.1W
LUMENS:	341lm
CBCP:	/
EFFICACY:	37.2lm/W

WAC Lighting
www.waclighting.com (US)
www.waclighting.com(International)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)
14,Lane 299, Bi Sheng Road,Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

PANTHER- MODEL: AEP1SI

WAC LIGHTING

Spot Luminaires


Project Name::

Type:

Product Image



Line Drawing

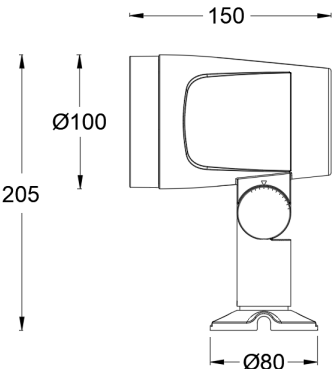

Product Description

The PANTHER Series is the professional LED floodlight designed by WAC for high-end outdoor lighting venues, featuring WAC's patented design for a perfect, clean profile that incorporates aerodynamic principles to utilize efficient heat dissipation and prolong the life of the LED fixtures. The PANTHER Series luminaires are available in a wide range of sizes and with the latest LED technology, and can be precisely adjusted vertically and horizontally. Precisely adjustable rotation both vertically and horizontally. Applications include architectural facades or landscape projections.

Product Features

- Body Materials:** Aluminum die-casting lamp body
- Optical System:** Lens + SUBROSA® Invisible Optical System
- Finishes:** Electrostatic Powder Coating
- Objection Direction:** Vertical up 90°, Down 30°, Horizontal 0-330°
- Accessory/Bracket:** Anti-glare Cover, Tensile Glass Frame, Hoop, Ground Insert
- Certification:** CCC
- IP Rating:** IP65
- Insulation Level:** Class I
- Operating Temperature:** -20℃~50℃

Product Specification

- **LED Type:** High Power
- **Source Power:** 19W (Max)
- **Source Lm:** 2700K 1900lm; 3000K 1995lm; 4000K 2090lm
- **LED Lifetime:** >50000h-L70 / B10-Ta25°C(LM-80 / TM-21)
- **CCT/CRI:** 2700K, 3000K, 4000K, Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V AC
- **Dimming:** ON-OFF/DMX512 Dimming
- **Net Weight:** Approx. 1.6Kg, excluding packaging

Order Model

Model	Power (W)	LEDs(quantity)	Max Lumens (lm)3000K	Control Systems	Beam	CCT	Finish
AEP1SI-19	19(MAX)	7	1096	EL ON-OFF 220V AC Power Supply ML DMX512 Dimming 220V AC Power Supply	S 6° 1 13° 2 22° 3 34° 5 50°	27 2700K 30 3000K 40 4000K	BK Black

Example: AEP1SI-19ELS30BK

PANTHER- MODEL: AEP1SI

Spot Luminaires

WAC LIGHTING


Project Name:

Type:

Accessory

ITEM	Abbreviate	PIC	Small
Wall Washer Visor	WW		AEP1SL-WW1-BK
Beam Elongated Lens/Horizontal Direction	BEL1		AEP1SL-BEL1-BK
Beam Elongated Lens / Vertical Direction	BEL2		AEP1SL-BEL2-BK
Support for Pole	SPL		AEP1SL-SPL-BK
Stainless plate with Spike (Round base)	SPK		AEP1NI-SPK-BK

Light Distribution @3000K Data



MODEL: AEP1SI-19ELS30BK


BEAM ANGLE: 6°

POWER: 22.2W

LUMENS: 1096lm

CBCP: /

EFFICACY: 49.3lm/W



MODEL: AEP1SI-19EL130BK


BEAM ANGLE: 13°

POWER: 22.3W

LUMENS: 868lm

CBCP: /

EFFICACY: 39lm/W



MODEL: AEP1SI-19EL230BK


BEAM ANGLE: 22°

POWER: 22.3W

LUMENS: 879lm

CBCP: /

EFFICACY: 39.5lm/W



MODEL: AEP1SI-19EL330BK


BEAM ANGLE: 34°

POWER: 22.4W

LUMENS: 1081lm

CBCP: /

EFFICACY: 48.3lm/W



MODEL: AEP1SI-19EL530BK

BEAM ANGLE: 50°

POWER: 22.3W

LUMENS: 871lm

CBCP: /

EFFICACY: 39lm/W

WAC Lighting

www.waclighting.com (US)

www.waclighting.com(International)

Headquarters

44 Harbor Park Drive • Port Washington, NY

Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)

14,Lane 299, Bi Sheng Road,Shanghai 201204

Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

PANTHER- MODEL: AEP1MI

Spot Luminaires


Project Name:

Type:

Product Image



Line Drawing

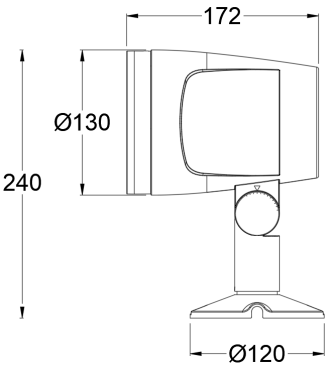

Product Description

The PANTHER Series is the professional LED floodlight designed by WAC for high-end outdoor lighting venues, featuring WAC's patented design for a perfect, clean profile that incorporates aerodynamic principles to utilize efficient heat dissipation and prolong the life of the LED fixtures. The PANTHER Series luminaires are available in a wide range of sizes and with the latest LED technology, and can be precisely adjusted vertically and horizontally. Precisely adjustable rotation both vertically and horizontally. Applications include architectural facades or landscape projections.

Product Features

- Body Materials:** Aluminum die-casting lamp body
- Optical System:** Lens + SUBROSA® Invisible Optical System
- Finishes:** Electrostatic Powder Coating
- Objection Direction:** Vertical up 90°, Down 30°, Horizontal 0-330°
- Accessory/Bracket:** Anti-glare Cover, Tensile Glass Frame, Hoop, Ground Insert
- Certification:** CCC
- IP Rating:** IP65
- Insulation Level:** Class I
- Operating Temperature:** -20℃~50℃

Product Specifications

- **LED Type:** High Power
- **Source Power:** 29W (Max)
- **Source Lm:** 2700K 2900lm; 3000K 3045lm; 4000K 3190lm
- **LED Lifetime:** >50000h-L70 / B10-Ta25°C(LM-80 / TM-21)
- **CCT/CRI:** 2700K, 3000K, 4000K, Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V AC
- **Dimming:** ON-OFF/DMX512 Dimming Control
- **Net Weight:** Approx 2.1Kg, excluding packaging

Order Model

Model	Power (W)	LEDs(quantity)	Max Lumens (lm)3000K	Control Systems	Beam	CCT	Finish
AEP1MI-29	29(MAX)	12	1725	EL ON-OFF 220V AC Power Supply ML DMX512 Dimming 220V AC Power Supply	S 6° 1 13° 2 22° 3 34° 5 50°	27 2700K 30 3000K 40 4000K	BK Black

Example: AEP1MI-29ELS30BK

WAC Lighting
www.waclighting.com (US)
www.waclighting.com(International)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)
14,Lane 299, Bi Sheng Road,Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

PANTHER- MODEL: AEP1MI

Spot Luminaires

WAC LIGHTING






Project Name:

Type:

Accessory

ITEM	Abbreviate	PIC	Medium
Wall Washer Visor	WW		AEP1ML-WW1-BK
Beam Elongated Lens/Horizontal Direction	BEL1		AEP1ML-BEL1-BK
Beam Elongated Lens / Vertical Direction	BEL2		AEP1ML-BEL2-BK
Support for Pole	SPL		AEP1SL-SPL-BK
Stainless plate with Spike (Round base)	SPK		AEP1SL-SPK-BK

Light Distribution @3000K Data

	MODEL: AEP1MI-29ELS30BK BEAM ANGLE: 6° POWER: 34W LUMENS: 1725lm CBCP: / EFFICACY: 50.7lm/W		MODEL: AEP1MI-29EL130BK BEAM ANGLE: 13° POWER: 33.9W LUMENS: 1364lm CBCP: / EFFICACY: 40.2lm/W
	MODEL: AEP1MI-29EL230BK BEAM ANGLE: 22° POWER: 33.8W LUMENS: 1428lm CBCP: / EFFICACY: 42.3lm/W		MODEL: AEP1MI-29EL330BK BEAM ANGLE: 34° POWER: 33.7W LUMENS: 1701lm CBCP: / EFFICACY: 50.4lm/W
	MODEL: AEP1MI-29EL530BK BEAM ANGLE: 50° POWER: 33.7W LUMENS: 1395lm CBCP: / EFFICACY: 41.4lm/W		

WAC Lighting
www.waclighting.com (US)
www.waclighting.com(International)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)
14,Lane 299, Bi Sheng Road,Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

PANTHER- MODEL: AEP1LI

Spot Luminaires


Project Name:

Type:

Product Image



Line Drawing



Product Description

The PANTHER Series is the professional LED floodlight designed by WAC for high-end outdoor lighting venues, featuring WAC's patented design for a perfect, clean profile that incorporates aerodynamic principles to utilize efficient heat dissipation and prolong the life of the LED fixtures. The PANTHER Series luminaires are available in a wide range of sizes and with the latest LED technology, and can be precisely adjusted vertically and horizontally. Precisely adjustable rotation both vertically and horizontally. Applications include architectural facades or landscape projections.

Product Features

- Body Materials:** Aluminum die-casting lamp body
- Optical System:** Lens + SUBROSA® Invisible Optical System
- Finishes:** Electrostatic Powder Coating
- Objection Direction:** Vertical up 90°, Down 30°, Horizontal 0-330°
- Accessory/Bracket:** Anti-glare Cover, Tensile Glass Frame, Hoop, Ground Insert
- Certification:** CCC
- IP Rating:** IP65
- Insulation Level:** Class I
- Operating Temperature:** -20℃~50℃

Product Specifications

- **LED Type:** High Power
- **Source Power:** 49W (Max)
- **Source Lm:** 2700K 4730lm; 3000K 4945lm; 4000K 5160lm
- **LED Lifetime:** >50000h-L70 / B10-Ta25°C(LM-80 / TM-21)
- **CCT/CRI:** 2700K, 3000K, 4000K, Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V AC
- **Dimming:** ON-OFF/DMX512 Dimming Control
- **Net Weight:** Approx. 3.1Kg, excluding packaging

Order Model

Model	Power (W)	LEDs(quantity)	Max Lumens (lm)3000K	Control Systems	Beam	CCT	Finish
AEP1LI-49	49(MAX)	18	2912	EL ON-OFF 220V AC Power Supply ML DMX512 Dimming 220V AC Power Supply	S 6° 1 13° 2 22° 3 34° 5 50°	27 2700K 30 3000K 40 4000K	BK Black

Example: AEP1LI-49ELS30BK

PANTHER- MODEL: AEP1LI

Spot Luminaires

WAC LIGHTING






Project Name:

Type:

Accessory

ITEM	Abbreviate	PIC	Large
Wall Washer Visor	WW		AEP1LL-WW1-BK
Beam Elongated Lens / Horizontal Direction	BEL1		AEP1LL-BEL1-BK
Beam Elongated Lens / Vertical Direction	BEL2		AEP1LL-BEL2-BK
Support for Pole	SPL		AEP1LL-SPL-BK
Stainless plate with Spike (Round base)	SPK		AEP1SL-SPK-BK

Light Distribution @3000K Data

	MODEL: AEP1LI-49ELS30BK BEAM ANGLE: 6° POWER: 54W LUMENS: 2911.8lm CBCP: / EFFICACY: 53.9lm/W		MODEL: AEP1LI-49EL130BK BEAM ANGLE: 13° POWER: 53.6W LUMENS: 2164.9lm CBCP: / EFFICACY: 40.4lm/W
	MODEL: AEP1LI-49EL230BK BEAM ANGLE: 22° POWER: 54.1W LUMENS: 2282lm CBCP: / EFFICACY: 42.18lm/W		MODEL: AEP1LI-49EL330BK BEAM ANGLE: 34° POWER: 53.9W LUMENS: 2738.2lm CBCP: / EFFICACY: 50.8lm/W
	MODEL: AEP1LI-49EL530BK BEAM ANGLE: 50° POWER: 49.8W LUMENS: 2239.2lm CBCP: / EFFICACY: 41.6lm/W		

WAC Lighting
www.waclighting.com (US)
www.waclighting.com(International)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)
14,Lane 299, Bi Sheng Road,Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598


PANTHER - MODEL: AEP5MI

WAC LIGHTING

Spot Luminaires

Project Name:

Type:

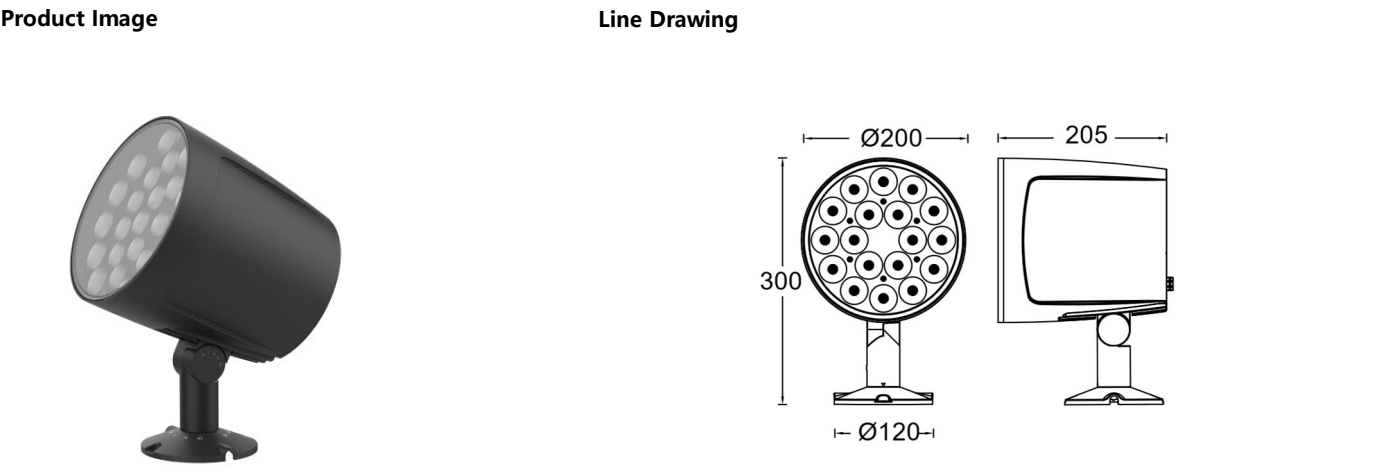

Product Description

The PANTHER Series is the professional LED floodlight designed by WAC for high-end outdoor lighting venues, featuring WAC's patented design for a perfect, clean profile that incorporates aerodynamic principles to utilize efficient heat dissipation and prolong the life of the LED fixtures. The PANTHER Series luminaires are available in a wide range of sizes and with the latest LED technology, and can be precisely adjusted vertically and horizontally. Precisely adjustable rotation both vertically and horizontally. Applications include architectural facades or landscape projections.

Product Features		Product Specifications	
•Body Materials:	Quality Aluminum Alloy Lamp Body	• LED Type:	High Power
•Optical System:	Lens	• Source Power:	65W (Max)
•Finishes:	Electrostatic Powder Coating	• Source Lm:	2700K 6500lm, 3000K 6825lm, 4000K 7150lm
•Objection Direction:	Vertical up 90°, Down 30°, Horizontal 0-330°	• LED Lifetime:	>50000h-L70 /B10-Ta25°C(LM-80/TM-21)
•Accessory/Bracket:	Anti-glare Cover, Tensile Glass Frame, Hoop	• CCT/CRI:	2700K/3000K/ 4000K , Ra90
•Certification:	CCC	• SDCM:	3 SDCM
•IP Rating:	IP65	• Input:	220V AC
•Insulation Level:	Class I	• Dimming:	ON-OFF / DMX512 Dimming Control
•Operating Temperature:	-20℃~50℃	• Net Weight:	Approx. 4.0Kg, excluding packaging

Order Model									
Model	Power	LEDs (quantity)	Max Lumens (lm)	Control Systems		Beam	CCT		Finish
AEP5MI-65	65	18	4019	EL ON-OFF		V 4°	27	2700K	BK Black
	65W(Max)			220V AC Power Supply			30	3000K	
				ML DMX512			40	4000K	
				220V AC Power Supply					

Example: AEP5MI-65ELV30BK


PANTHER - MODEL: AEP5MI

WAC LIGHTING

Spot Luminaires

Product Name:

Type:

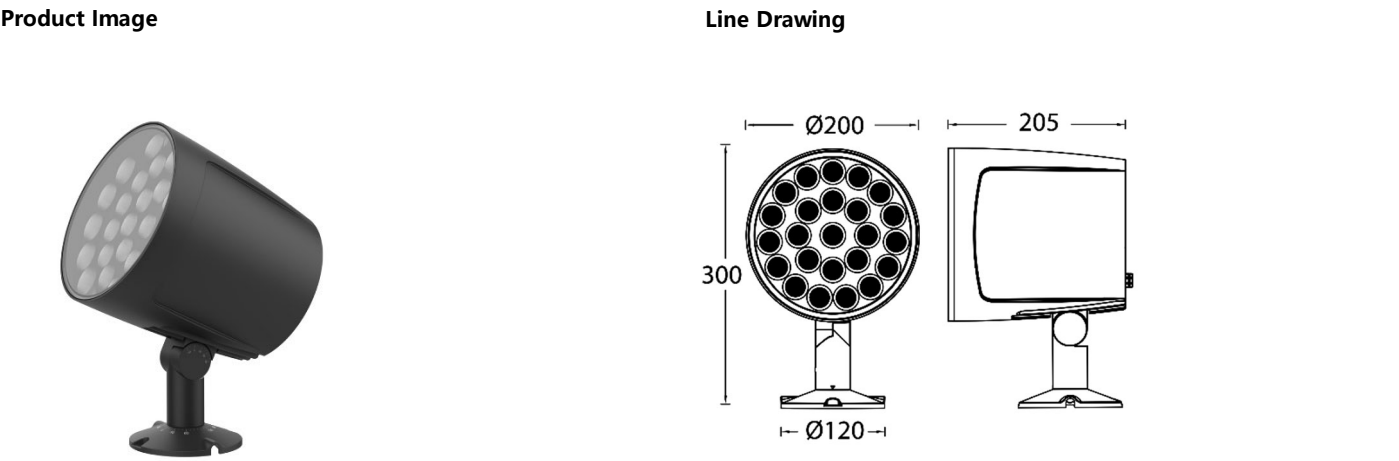

Product Description

Product Features

- **Body Materials:** Aluminum die-casting lamp body
- **Optical System:** Lens + SUBROSA® Invisible Optical System
- **Finishes:** Electrostatic Powder Coating
- **Objection Direction:** Vertical up 90°, Down 30°, Horizontal 0-330°
- **Accessory/Bracket:** Anti-glare Cover, Tensile Glass Frame, Hoop
- **Certification:** CCC
- **IP Rating:** IP65
- **Insulation Level:** Class I
- **Operating Temperature:** -20℃~50℃

Product Specifications

- **LED Type:** High Power
- **Source Power:** 65W (Max)
- **Source Lm:** 2700K 6500lm, 3000K 6825lm, 4000K 7150lm
- **LED Lifetime:** >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 2700K/3000K/ 4000K , Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V AC
- **Dimming:** ON-OFF / DMX512 Dimming
- **Net Weight:** Approx. 4.0Kg, excluding packaging

Order Model

Model	Power	LEDs (quantity)	Max Lumens (lm)	Control Systems	Beam	CCT	Finish
AEP5MI-65	65 65W(Max)	24	3954	EL ON-OFF 220V AC Power Supply ML DMX512 220V AC Power Supply	S 6° 1 10° 2 22° 3 33° 4 47° J 14°x44°	27 2700K 30 3000K 40 4000K	BK Black

Example: AEP5MI-65EL130BK


PANTHER - MODEL: AEP5MI

Spot Luminaires


Project Name:

Type:


Accessory

Item	Abbreviate	Pic	Model
Wall Wash Visor	WW4		AEP5MI-WW4-BK
Wall Wash Visor	WW5		AEP5MI-WW5-BK
Support for Pole	SPL		Please contact the product manager to place an order


Light Distribution @3000K Data




MODEL:	AEP5MI-65MLV30BK
BEAM ANGLE:	4°
POWER:	70.64W
LUMENS:	4019.8 lm
CBCP:	432507 cd
EFFICACY:	56.9 lm /W




MODEL:	AEP5MI-65MLS30BK
BEAM ANGLE:	6°
POWER:	68.10W
LUMENS:	3954.8 lm
CBCP:	176617 cd
EFFICACY:	58.07 lm /W




MODEL:	AEP5MI-65ML130BK
BEAM ANGLE:	10°
POWER:	67.81W
LUMENS:	3858.6 lm
CBCP:	69891 cd
EFFICACY:	56.9 lm /W



MODEL:	AEP5MI-65ML230BK
BEAM ANGLE:	22°
POWER:	67.39W
LUMENS:	3080 lm
CBCP:	14020 cd
EFFICACY:	45.71 lm /W



MODEL:	AEP5MI-65ML330BK
BEAM ANGLE:	33°
POWER:	68.17W
LUMENS:	3409.2 lm
CBCP:	8398 cd
EFFICACY:	50.01 lm /W




MODEL:	AEP5MI-65ML530BK
BEAM ANGLE:	47°
POWER:	68.42W
LUMENS:	2755.1 lm
CBCP:	3977 cd
EFFICACY:	40.27 lm /W

PANTHER - MODEL: AEP5MI

Spot Luminaires

Project Name:

Type:



MODEL:	AEP5MI-65MLJ30BK
BEAM ANGLE:	14°x44°
POWER:	67.32W
LUMENS:	2750.5 lm
CBCP:	12697 cd
EFFICACY:	40.85 lm /W