

LANNE PRO ADJ - MODEL: AER44

WAC LIGHTING

Recessed Ceiling Luminaires

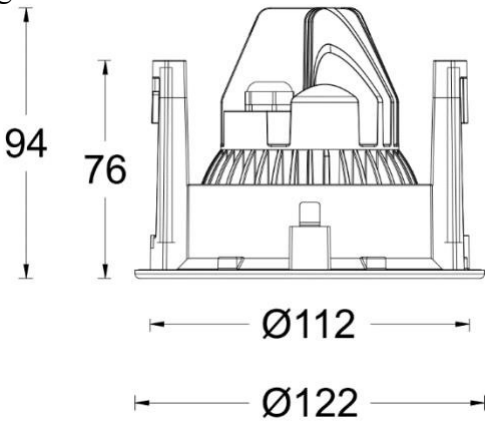
PROJECT:

TYPE:

Product Image



Line Drawing



Product Description

Lanne Pro ADJ embedded tube lamp, with exquisite and concise overall design, exquisite and detailed appearance and structure, installed with screws and sliders. It can adapt to ceilings of different thicknesses and is easy to adjust. Excellent optical performance, with angle adjustment function, the lamp is mainly suitable for functional lighting in public high-altitude areas.

Product Features

- Body Material: Aluminum alloy die-casting lamp body+stainless steel frame
- Optical System: Lens
- Finish: Static electricity powder coating
- Adjustable Angle: Horizontal 355 °, vertical ± 25 °
- Accessories: /
- Certification: CCC
- IP Rating: IP65
- Insulation Level: Class I
- Operating Temperature: -20°C~50°C

Product Specifications

- Opening Size: Ø116mm
- Ceiling Thickness: 1mm~50mm
- LED Type: COB
- LED Power: 13W (Max)
- Source Lm: 3000K 1560lm; 4000K 1690lm
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K/ 4000K , Ra90
- SDCM: 3 SDCM
- Input: 220V/AC, 50/60Hz
- Dimming: ON-OFF / 0-10V Dimming
- Net Weight: 1.0Kg without packing

Ordering model

Model	Size	Comment	LED Power	Driver	Beam	CCT	Reflector	Finish
AER4	4 4"	A Adjustable	13 13W	EL ON-OFF	1 13°	30 3000K 40 4000K	B Black S Specular	WT White BN Brushed Nickel
				220V AC Power Supply	2 20°			
				DL 0-10V Dimming	3 30°			
				220V AC Power Supply	4 40°			

Example: AER44A-13EL130BWT

LANNE PRO ADJ - MODEL: AER44

WAC LIGHTING





Recessed Ceiling Luminaires

PROJECT:

TYPE:

Accessories

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

	MODEL: AER44A-13DL130SWT BEAM ANGLE: 13° POWER: 15.2W LUMENS: 810.3 lm CBCP: 6416 cd EFFICACY: 53.2 lm /W		MODEL: AER44A-13DL230SWT BEAM ANGLE: 20° POWER: 15.2W LUMENS: 913.2 lm CBCP: 5843 cd EFFICACY: 60 lm /W
	MODEL: AER44A-13DL330SWT BEAM ANGLE: 30° POWER: 15.2W LUMENS: 910.2 lm CBCP: 2657 cd EFFICACY: 59.2 lm /W		MODEL: AER44A-13DL430SWT BEAM ANGLE: 40° POWER: 15.3W LUMENS: 874.9 lm CBCP: 1574 cd EFFICACY: 57.3 lm /W

LANNE PRO ADJ - MODEL: AER45

WAC LIGHTING

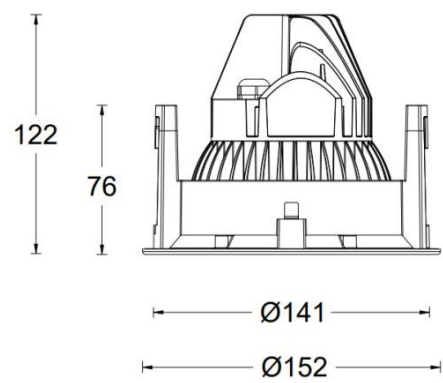
Recessed Ceiling Luminaires

PROJECT:

TYPE:

Product Image

Line Drawing



Product Description

Lanne Pro ADJ embedded tube lamp, with exquisite and concise overall design, exquisite and detailed appearance and structure, installed with screws and sliders. It can adapt to ceilings of different thicknesses and is easy to adjust. Excellent optical performance, with angle adjustment function, the lamp is mainly suitable for functional lighting in public high-altitude areas.

Product Features

- Body Material: Aluminum alloy die-casting lamp body+stainless steel frame
- Optical System: Lens
- Finish: Static electricity powder coating
- Adjustable Angle: Horizontal 355 °, vertical ± 25 °
- Accessories: /
- Certification: CCC
- IP Rating: IP65
- Insulation Level: Class I
- Operating Temperature: -20°C~50°C

Product Specifications

- Opening Size: Ø145mm
- Ceiling Thickness: 1mm~50mm
- LED Type: COB
- LED Power: 18W (Max)
- Source Lm: 3000K 2160lm; 4000K 2340lm
- LED Lifetime: >50000h-L70 /B10-Ta25°C (LM-80/TM-21)
- CCT/CRI: 3000K/ 4000K , Ra90
- SDCM: 3 SDCM
- Input: 220V/AC, 50/60Hz
- Dimming: ON-OFF / 0-10V Dimming
- Net Weight: 1.2Kg without packing

Ordering model

Model	Size	Comment	LED Power	Driver	Beam	CCT	Reflector	Finish
AER4	5 5"	A Adjustable	18 18W	EL ON-OFF	1 19°	30 3000K 40 4000K	B Black S Specular	WT White BN Brushed Nickel
				220V AC Power Supply	2 26°			
				DL 0-10V Dimming	3 38°			
				220V AC Power Supply	5 52°			

Example: AER45A-18EL130BWT

LANNE PRO ADJ - MODEL: AER45

Recessed Ceiling Luminaires





WAC LIGHTING

PROJECT:

TYPE:

Accessories

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

	MODEL: AER45A-18DL130SWT BEAM ANGLE: 19° POWER: 20.1W LUMENS: 1642.3 lm CBCP: 11484 cd EFFICACY: 81.5 lm /W		MODEL: AER45A-18DL230SWT BEAM ANGLE: 26° POWER: 20W LUMENS: 1776.5 lm CBCP: 8357 cd EFFICACY: 88.8 lm /W
	MODEL: AER45A-18DL330SWT BEAM ANGLE: 38° POWER: 20.2W LUMENS: 1809.6 lm CBCP: 4270 cd EFFICACY: 89.7 lm /W		MODEL: AER45A-18DL530SWT BEAM ANGLE: 52° POWER: 20.1W LUMENS: 1665.1 lm CBCP: 2442 cd EFFICACY: 83.1 lm /W

LANNE PRO ADJ - MODEL: AER46

WAC LIGHTING

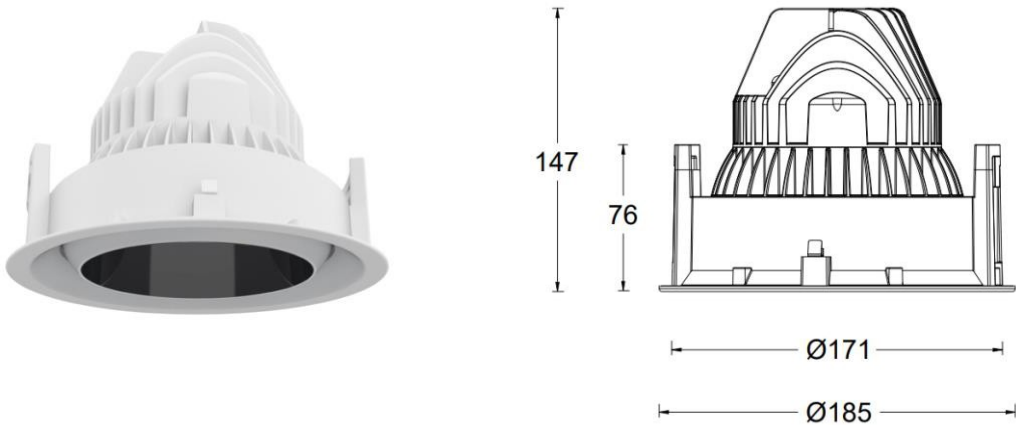
Recessed Ceiling Luminaires

PROJECT:

TYPE:

Product Image

Line Drawing



Product Description

Lanne Pro ADJ embedded tube lamp, with exquisite and concise overall design, exquisite and detailed appearance and structure, installed with screws and sliders. It can adapt to ceilings of different thicknesses and is easy to adjust. Excellent optical performance, with angle adjustment function, the lamp is mainly suitable for functional lighting in public high-altitude areas..

Product Features

- Body Material: Aluminum alloy die-casting lamp body+stainless steel frame
- Optical System: Lens
- Finish: Static electricity powder coating
- Adjustable Angle: Horizontal 355 °, vertical ± 25 °
- Accessories: /
- Certification: CCC
- IP Rating: IP65
- Insulation Level: Class I
- Operating Temperature: -20°C~50°C

Product Specifications

- Opening Size: Ø175mm
- Ceiling Thickness: 1mm~50mm
- LED Type: COB
- LED Power: 33W (Max)
- Source Lm: 3000K 4180lm; 4000K 4318lm
- LED Lifetime: >50000h-L70 /B10-Ta25°C (LM-80/TM-21)
- CCT/CRI: 3000K/ 4000K , Ra90
- SDCM: 3 SDCM
- Input: 220V/AC, 50/60Hz
- Dimming: ON-OFF / 0-10V Dimming
- Net Weight: 1.5Kg without packing

Ordering model

Model	Size	Comment	LED Power	Driver	Beam	CCT	Reflector	Finish
AER4	6 6"	A Adjustable	33 33W	EL ON-OFF	1 19°	30 3000K 40 4000K	B Black S Specular	WT White BN Brushed Nickel
				220V AC Power Supply	2 26°			
				DL 0-10V Dimming	3 38°			
				220V AC Power Supply	5 52°			

Example: AER46A-33EL130BWT

LANNE PRO ADJ - MODEL: AER46

Recessed Ceiling Luminaires

WAC LIGHTING

PROJECT:

TYPE:

Accessories



LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

	MODEL: AER46A-33DL130SWT BEAM ANGLE: 19° POWER: 37.3W LUMENS: 3548.1 lm CBCP: 23084 cd EFFICACY: 95.2lm /W		MODEL: AER46A-33DL230SWT BEAM ANGLE: 26° POWER: 37.2W LUMENS: 3470.9 lm CBCP: 13515 cd EFFICACY: 93.3 lm /W
	MODEL: AER46A-33DL330SWT BEAM ANGLE: 38° POWER: 37.5W LUMENS: 3686.2 lm CBCP: 8818 cd EFFICACY: 98.4 lm /W		MODEL: AER46A-33DL 530SWT BEAM ANGLE: 52° POWER: 37.4W LUMENS: 3525 lm CBCP: 5185 cd EFFICACY: 94.2 lm /W