

VOLO- MODEL: AES5


Linear Luminaires

WAC LIGHTING

Responsible Lighting®

Project Name:

Type:

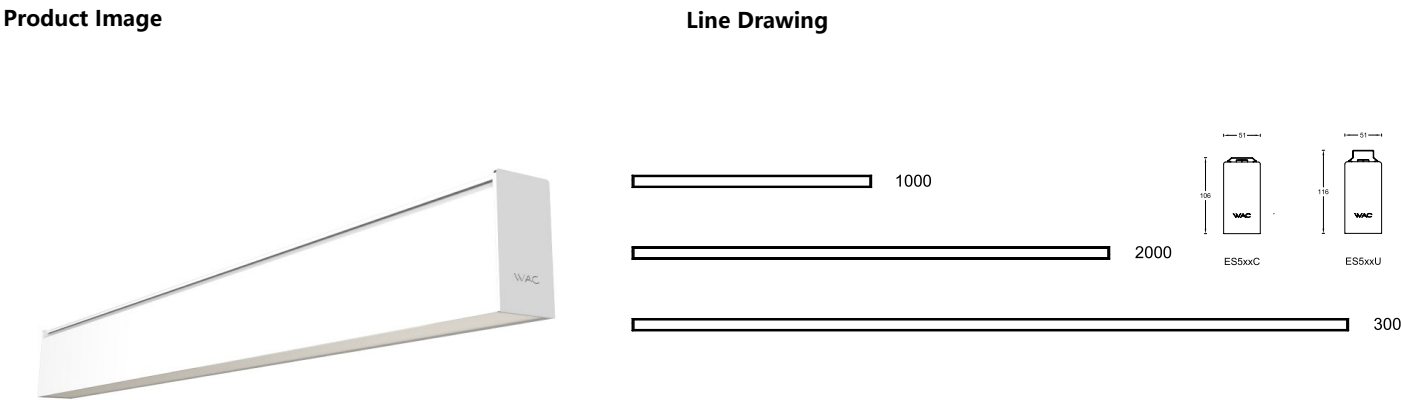

Product Description

Designed with a unified aluminum housing, SLANA presents a minimalist and elegant profile, reflecting a modern aesthetic. Equipped with high-performance LED light sources and an efficient heat dissipation structure, it ensures stable, long-lasting illumination and excellent optical performance, providing users with a refined and comfortable lighting experience. The fixture supports seamless end-to-end connection, with customizable lengths, and offers multiple installation options, suspended, surface-mounted, or recessed flexibly adapting to various semi-outdoor applications such as canopies and corridors, delivering a professional and visually harmonious lighting solution.

Product Features		Product Specifications	
• Body Materials:	Aluminum die-casting lamp body	• LED Type:	SMD LED
• Optical System:	Anti-glare panel	• Power:	35W/1000mm
• Finishes:	Electrostatic powder coating	• Source Lm:	2700K 4038lm;3000K 4250lm;4000K 4402lm
• Objection Direction:	/	• LED Lifetime:	> 50,000h-L70 /B10-Ta25°C(LM-80/TM-21)
• Accessory/Bracket:	/	• CCT/CRI:	2700K / 3000K / 4000K , Ra90
• Certification:	CCC	• SDCM:	3 SDCM
• IP Rating:	IP65	• Input:	220V AC
• Insulation Level:	Class I	• Dimming:	ON-OFF/0-10V
• Operating Temperature:	-20℃— 50℃	• Net Weight:	Approx. 2.2Kg, without packaging

Order Model

Model	Length (mm)	Comment	Power (W)	LEDs (quantity)	Max Lumens(lm)	Control Systems	Beam	CCT	Finish
AES510	1000	C Ceiling Mounted U U-Shape Bracket	035 35(Max)	288	3141	EL ON-OFF 220V AC Power Supply	P(Frosted cover) Y(Prismatic cover)	27 2700K	WT White
AES520	2000		070 70(Max)	576	5652	DL 0-10V Dimming		30 3000K	
AES530	3000		105 105(Max)	864	8478	220V AC Power Supply		40 4000K	

Example: AES510C-035ELP27BK

VOLO- MODEL: AES5

Linear Luminaires


WAC LIGHTING

Responsible Lighting®


Project Name:

Type:

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



MODEL:	AES510C-035ELP30BK
BEAM ANGLE:	112°
POWER:	38.5W
LUMENS:	3095lm
CBCP:	1105cd
EFFICACY:	80.2lm/W



MODEL:	AES510C-035ELY30BK
BEAM ANGLE:	106°
POWER:	38.5W
LUMENS:	3141lm
CBCP:	1160cd
EFFICACY:	82lm/W