

LEDME II - MODEL: ASLIR8FLD

Recessed Showcase Lighting

WAC LIGHTING


Project Name:

Type:

Product



Line Drawing

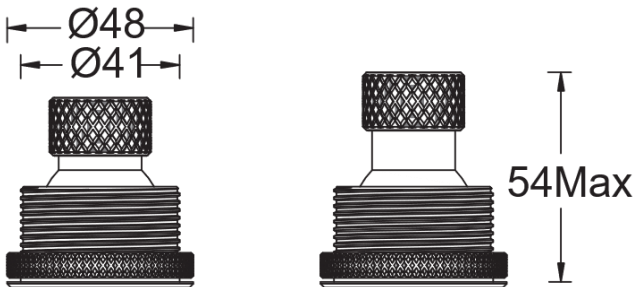

Product Description

The LEDme II Series features a sleek and compact design, incorporating WAC’s advanced SUBROSA anti-glare technology combined with a precise adjustable-focus optical system. This design allows users to conveniently adjust the beam angle according to the characteristics of each exhibit, perfectly meeting the diverse lighting needs of different displays. The front frame and lighting module can be easily detached by hand, enabling the frame to be pre-installed during showcase fabrication, while maintenance can later be performed on the lighting module only. Ideal for museum showcases and high-end art exhibitions, the LEDme II Series delivers refined, flexible, and professional lighting performance for delicate display environments.

Product Features

- **Body Material:** Aluminum lamp body
- **Optical System:** Zoomable Lens + SUBROSA® Invisible Light System
- **Finish:** Liquid Baked Paint
- **Projection Angle:** Horizontal adjustment in any direction; vertical -30~30° adjustment.
- **Accessory/Bracket:** Optional Extension Cord
- **Certification:** CQC
- **IP Rating:** IP20
- **Insulation Class:** Class III
- **Operating Temperature:** -20°C~40°C

Product Specifications

- **Cutout:** Ø42mm
- **Mounting Thickness:** 1~15mm
- **LED Type:** High-Power LED
- **Power:** 2W
- **Source Lm:** 175lm(3000K) / 185lm (4000K)
- **LED Lifetime:** >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 3000K / 4000K , >Ra90 or Ra97(>Ra95) optional
- **SDCM:**3 SDCM
- **Input:** 700mA max 3V DC(constant current driver)
- **Dimming:**Compatible with WAC-specific MTB power splitter (not included), see specification for details .
- **Net Weight:** Approx. 0.1Kg, excluding packaging.

Order Model

| Model               | LED       | Drive                         | Beam      | CRI              | CCT                  | Finish   |
|---------------------|-----------|-------------------------------|-----------|------------------|----------------------|----------|
| ASLIR8F<br>LEDme II | LD LED 2W | M MTB driver<br>N Single wire | F 6°~ 45° | 9 Ra90<br>A Ra97 | 30 3000K<br>40 4000K | BK Black |
| ASLIR8F             | LD        | N                             | F         | 9                | 30                   | BK       |

Example: ASLIR8FLD-NF930BK

Note: All models do not include electrical appliances, consult WAC for details.

LEDME II - MODEL: ASLIR8FLD

Recessed Showcase Lighting

WAC LIGHTING

Project Name:

Type:

Accessory

MTB-CABLE-1000-BK

ASLIR8FLD-M extension cable for use between MTB power splitter and ASLIR8FLD-M series display cabinet fixtures, 1m total length, with quick connect plugs on both ends.



Note: The length of the SLIR8FLD-M original fixture input wire is approximately 0.5 meters.  
Specialized MTB power splitters and extension cords are ordered separately.


4LD-700MA10D-LF-C

SLIR8FLD-N Specialized Appliance: Input 220V~240V AC / 50Hz, Output 700mA, 2~14V. Support 0-10V dimming, can drive 1-4 display case lights (in series).


Dimension (L\*W\*H): 121\*41\*22, mm.

Note: The length of the ASLIR8FLD-N original fixture input wire is approximately 0.3 meters. ASLIR8FLD-N special electrical appliances have to be ordered separately, without cable.

Light Distribution @3000K Data



|              |                         |
|--------------|-------------------------|
| MODEL :      | ASLIR8FLD Narrow        |
| BEAM ANGLE : | 6°                      |
| POWER :      | Appliances not included |
| LUMENS :     | 40lm                    |
| CBCP :       | 1750cd                  |
| EFFICACY :   | /                       |



|              |                         |
|--------------|-------------------------|
| MODEL :      | ASLIR8FLD Wide          |
| BEAM ANGLE : | 45°                     |
| POWER :      | Appliances not included |
| LUMENS :     | 89lm                    |
| CBCP :       | 210cd                   |
| EFFICACY :   | /                       |

LEDME II - MODEL: ASLIR8FLM

Recessed Showcase Lighting

WAC LIGHTING


Project Name:

Type:

Product



Line Drawing

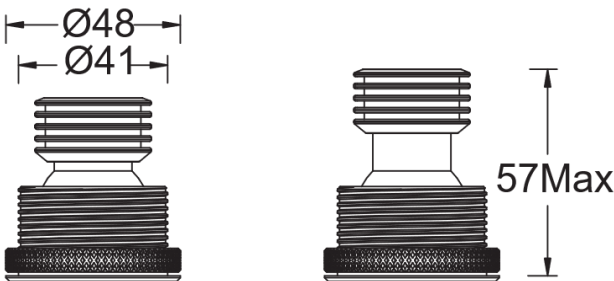

Product Description

The LEDme II Series features a sleek and compact design, incorporating WAC’s advanced SUBROSA anti-glare technology combined with a precise adjustable-focus optical system. This design allows users to conveniently adjust the beam angle according to the characteristics of each exhibit, perfectly meeting the diverse lighting needs of different displays. The front frame and lighting module can be easily detached by hand, enabling the frame to be pre-installed during showcase fabrication, while maintenance can later be performed on the lighting module only. Ideal for museum showcases and high-end art exhibitions, the LEDme II Series delivers refined, flexible, and professional lighting performance for delicate display environments.

Product Features

- **Body Material:** Aluminum lamp body
- **Optical System:** Zoomable Lens + SUBROSA® Invisible Light System
- **Finish:** Liquid Baked Paint
- **Projection Angle:** Horizontal adjustment in any direction; vertical -30~30° adjustment.
- **Accessory/Bracket:** /
- **Certification:** CQC
- **IP Rating:** IP20
- **Insulation Class:** Class III
- **Operating Temperature:** -20°C~40°C

Product Specifications

- **Cutout:** Ø42mm
- **Mounting Thickness:** 1~15mm
- **LED Type:** High-Power LED
- **Power:** 4.5W
- **Source Lm:** 410lm(3000K) / 440lm (4000K)
- **LED Lifetime:** >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 3000K / 4000K , >Ra90
- **SDCM:** 3 SDCM
- **Input:** 350mA max, 12V DC(constant-current driver)
- **Dimming:** Additional configuration of constant current electrical appliances is required (not included), and the dimming method is determined by the power supply.
- **Net Weight:** Approx. 0.1Kg, excluding packaging.

Order Model

| Model               | LED         | Drive                         | Beam      | CRI    | CCT                  | Finish   |
|---------------------|-------------|-------------------------------|-----------|--------|----------------------|----------|
| ASLIR8F<br>LEDme II | LM LED 4.5W | M MTB driver<br>N Single wire | F 8°~ 45° | 9 Ra90 | 30 3000K<br>40 4000K | BK Black |
| ASLIR8F             | LM          | N                             | F         | 9      | 30                   | BK       |

Example: ASLIR8FLM-NF930BK

Note: All models do not include electrical appliances, consult WAC for details.

# LEDME II - MODEL: ASLIR8FLM

## Recessed Showcase Lighting

# WAC LIGHTING

Project Name:

Type:

### Accessory

#### MTB-CABLE-1000-BK

ASLIR8FLM-M extension cable for use between MTB power splitter and ASLIR8FLM-M series display cabinet fixtures, 1m total length, with quick connect plugs on both ends.




Note: The length of the SLIR8FLM-M original fixture input wire is approximately 0.5 meters. Specialized MTB power splitters and extension cords are ordered separately.

#### 4LD-350MA10D-LF-C


Specialized Appliance: Input 220V~240V AC / 50Hz, Output 350mA, 6~30V. Support 0-10V dimming, can drive 1-2 display case lights (in series).  
Dimension (L\*W\*H): 121\*41\*22, mm.

Note: The length of fixture input wire is approximately 0.5 meters. ASLIR6FLD-N special electrical appliances have to be ordered separately, without cable.

### Light Distribution@3000K Data



|              |                         |
|--------------|-------------------------|
| MODEL :      | ASLIR8FLM Narrow        |
| BEAM ANGLE : | 8°                      |
| POWER :      | Appliances not included |
| LUMENS :     | 61lm                    |
| CBCP :       | 1210cd                  |
| EFFICACY :   | /                       |



|              |                         |
|--------------|-------------------------|
| MODEL :      | ASLIR8FLM Wide          |
| BEAM ANGLE : | 45°                     |
| POWER :      | Appliances not included |
| LUMENS :     | 173lm                   |
| CBCP :       | 388cd                   |
| EFFICACY :   | /                       |

LEDME II - MODEL: ASLIR9FLD

Recessed Showcase Lighting

WAC LIGHTING


Project Name:

Type:

Product Image



Line Drawing

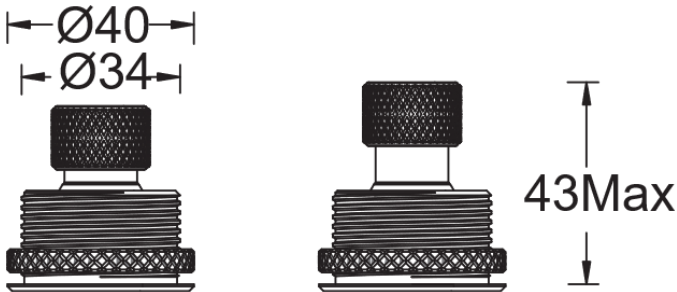

Product Description

The LEDme II Series features a sleek and compact design, incorporating WAC’s advanced SUBROSA anti-glare technology combined with a precise adjustable-focus optical system. This design allows users to conveniently adjust the beam angle according to the characteristics of each exhibit, perfectly meeting the diverse lighting needs of different displays. The front frame and lighting module can be easily detached by hand, enabling the frame to be pre-installed during showcase fabrication, while maintenance can later be performed on the lighting module only. Ideal for museum showcases and high-end art exhibitions, the LEDme II Series delivers refined, flexible, and professional lighting performance for delicate display environments.

Product Features

- **Body Material:** Aluminum lamp body
- **Optical System:** Zoomable Lens + SUBROSA® Invisible Light System
- **Finish:** Liquid Baked Paint
- **Projection Angle:** Horizontal adjustment in any direction; vertical -30~30° adjustment.
- **Accessory/Bracket:** Optional Extension Cord
- **Certification:** CQC
- **IP Rating:** IP20
- **Insulation Class:** Class III
- **Operating Temperature:** -20°C~40°C

Product Specifications

- **Cutout:** Ø35mm
- **Mounting Thickness:** 1~15mm
- **LED Type:** High-Power LED
- **Power:** 1W
- **Source Lm:** 100lm(3000K) / 110lm (4000K)
- **LED Lifetime:** >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 3000K / 4000K , >Ra90 or Ra97(>Ra95) optional
- **SDCM:** 3 SDCM
- **Input:** 350mA max 3V DC(constant current driver)
- **Dimming:** Compatible with WAC-specific MTB power splitter (not included), see specification for details .
- **Net Weight:** Approx. 0.1Kg, excluding packaging.

Order Model

| Model               | LED       | Drive                         | Beam      | CRI    | CCT      | Finish   |
|---------------------|-----------|-------------------------------|-----------|--------|----------|----------|
| ASLIR9F<br>LEDme II | LD LED 1W | M MTB driver<br>N Single wire | F 8°~ 45° | 9 Ra90 | 30 3000K | BK Black |
|                     |           |                               |           | A Ra97 | 40 4000K |          |
| ASLIR9F             | LD        | N                             | F         | 9      | 30       | BK       |

Example: ASLIR9FLD-NF930BK

Note: All models do not include electrical appliances, consult WAC for details.

LEDME II - MODEL: ASLIR9FLD

Recessed Showcase Lighting

WAC LIGHTING

Project Name:

Type:

Accessory

MTB-CABLE-1000-BK

ASLIR9FLD-M extension cable for use between MTB power splitter and ASLIR9FLD-M series display cabinet fixtures, 1m total length, with quick connect plugs on both ends.




Note: The length of the SLIR9FLD-M original fixture input wire is approximately 0.5 meters. Specialized MTB power splitters and extension cords are ordered separately.

4LD-350MA10D-LF-C


SLIR6FLD-N Specialized Appliance: Input 220V~240V AC / 50Hz, Output 350mA, 6~30V.  
Support 0-10V dimming, can drive 2-8 display case lights (in series).  
Dimension (L\*W\*H): 121\*41\*22, mm.

Note: special electrical appliances have to be ordered separately, without cable.

Light Distribution @3000K Data



|              |                         |
|--------------|-------------------------|
| MODEL :      | ASLIR9FLD Narrow        |
| BEAM ANGLE : | 8°                      |
| POWER :      | Appliances not included |
| LUMENS :     | 15lm                    |
| CBCP :       | 253cd                   |
| EFFICACY :   | /                       |



|              |                         |
|--------------|-------------------------|
| MODEL :      | ASLIR9FLD Wide          |
| BEAM ANGLE : | 45°                     |
| POWER :      | Appliances not included |
| LUMENS :     | 52lm                    |
| CBCP :       | 79cd                    |
| EFFICACY :   | /                       |