

MERE ZOOM- MODEL: ATL36SLM

W Track Luminaires

WAC LIGHTING

Responsible Lighting®


Project:

Type:

Product Image



Line Drawing

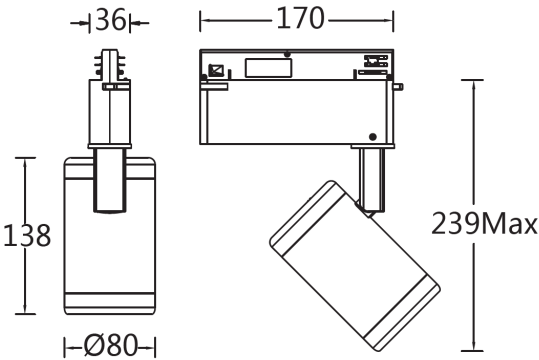

Product Description

MERE Zoom features a modular electronic zoom design and is compatible with W-track systems. The luminaire has a clean, compact profile with no visible heat sink and a die-cast aluminum housing. It utilizes a COB light engine and allows APP-based beam zooming and stretching, along with tool-free, field-changeable optical accessories. Suitable for museums, galleries, commercial spaces, hospitality, and retail applications.

Product Features

- Body Material: Aluminum alloy die-casting
- Optical System: Lens+Reflector
- Finish: Static electricity powder coating, BK/WT
- Adjustable Angle: Horizontal 0~365°, Vertical 0-90°
- Accessories: see attachment
- IP Rating: IP20
- Certification: CCC
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C
- Net Weight: 1.0Kg without packing

Product Specifications

- LED Type: COB
- LED power: 18W
- Source Lm: 2700K: 2030lm 3000K: 2120lm 3500K: 2230lm 4000K: 2330lm
- LED Lifetime: >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K / 3000K / 3500K / 4000K, Ra90 或 Ra97(>Ra95)
- SDCM: 2 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: Wireless APP control (compatibility testing with the project site is required prior to implementation)

Ordering model

Model	LED	Dimming	Beam	CRI	CCT	Finish
ATL36S MERE ZOOM	LM18 COB 18W	B APP	Z ZOOM	9 90 A 97	27 2700K 30 3000K 35 3500K 40 4000K CC 2700-6000K	WT White BK Black
TL36S	LM18	B	Z	9	30	WT

Sample: ATL36SLM18-BZ930WT

WAC Lighting
www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting Technology (Shanghai) Co, Ltd.
14,Lane 299, Bi Sheng Road,Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

MERE ZOOM- MODEL: ATL38SLM

W Track Luminaires

WAC LIGHTING

Responsible Lighting®


Project:

Type:

Product Image



Line Drawing

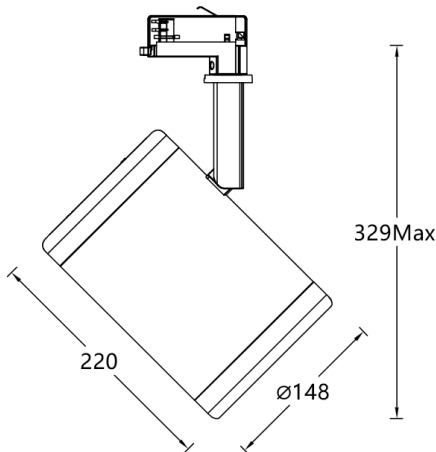

Product Description

MERE Zoom features a modular electronic zoom design and is compatible with W-track systems. The luminaire has a clean, compact profile with no visible heat sink and a die-cast aluminum housing. It utilizes a COB light engine and allows APP-based beam zooming and stretching, along with tool-free, field-changeable optical accessories. Suitable for museums, galleries, commercial spaces, hospitality, and retail applications.

Product Features

- Body Material: Aluminum alloy die-casting
- Optical System: Lens+Reflector
- Finish: Static electricity powder coating, BK/WT
- Adjustable Angle: Horizontal 0~365°, Vertical 0-90°
- Accessories: see attachment
- IP Rating: IP20
- Certification: CCC
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C
- Net Weight: 3.9Kg without packing

Product Specifications

- LED Type: COB
- LED power: 38W 或 48W 可选
- Source Lm: 2700K: 3800lm (38W) / 4800lm (48W)
3000K: 3950lm (38W) / 5000lm (48W)
3500K: 4100lm (38W) / 5150lm (48W)
4000K: 4300lm (38W) / 5250lm (48W)
- LED Lifetime: >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K / 3000K / 3500K / 4000K, Ra90 或 Ra97(>Ra95)
- SDCM: 2 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: Wireless APP control (compatibility testing with the project site is required prior to implementation)

Ordering model

Model	LED	Dimming	Beam	CRI	CCT	Finish
ATL38S MERE	LM38 COB 38W LM48 COB 48W	B APP	Z ZOOM	9 90 A 97	27 2700K 30 3000K 35 3500K 40 4000K CC 2700-6000K	WT White BK Black
ATL38S	LM48	B	Z	9	30	WT

Sample: ATL38SLM48-BZ930WT

WAC Lighting
www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting Technology (Shanghai) Co, Ltd.
14,Lane 299, Bi Sheng Road,Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598