


SLANA - MODEL: AES2S

Surface Mounted Luminaires



PROJECT:

TYPE:

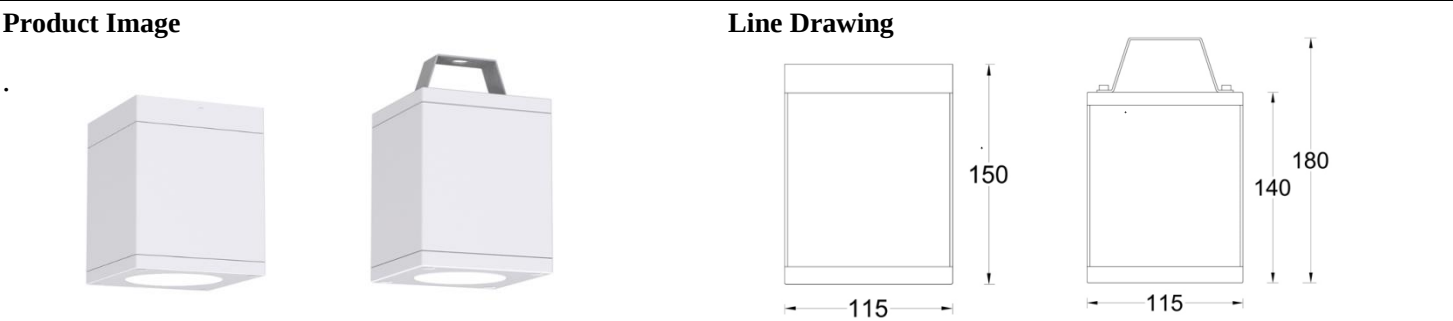

Product Description

The Slana 5 "square surface mounted downlights are more decorative in building lighting, using ceiling mounted and U-shaped bracket installation. The exquisite and meticulous appearance and structural design, excellent optical performance, and flexible humanized accessories can bring users a perfect lighting environment experience, suitable for functional lighting in public spaces.

Product Features		Product Specifications	
• Body Material:	Die cast aluminum alloy end caps and aluminum alloy lamp bodies	• LED Type:	COB
• Optical System:	Efficient and low glare TIR lens with special design	• LED Power:	25W (Max)
• Finish:	Static electricity powder coating	• Source Lm:	3000K:2540lm;4000K:2640lm
• Adjustable Angle:	/	• LED Lifetime:	>50000h-L70 /B10-Ta25°C(LM-80/TM-21)
• Accessories:	/	• CCT/CRI:	3000K/4000K, Ra80
• Certification:	CCC	• LED SDCM	≤3
• IP Rating:	IP65	• Input:	220V AC, 50Hz
• Insulation Level:	Class I	• Dimming:	ON-OFF/0-10V
• Operating Temperature:	-20°C~50°C	• Net Weight:	1.6Kg without packing

Order Model

Model	Comment	Power (W)	LEDs (quantity)	Max Lumens (lm)	Control Systems	Beam	CCT	Finish
AES2S	U U-Shape Bracket	27 25(Max)	COB	2251	EL ON-OFF 220V AC Power Supply	1 16° 2 21° 3 33°	30 3000K 40 4000K	WT White
	C Ceiling Mounted				DL 0-10V Dimming 220V AC Power Supply			BK Black

Example: AES2SU-27EL130WT

SLANA - MODEL: AES2S

Surface Mounted Luminaires



PROJECT:

TYPE:

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

	MODEL: AES2SC-27EL130BK BEAM ANGLE: 15.5 ° POWER: 30W LUMENS: 2096.3lm CBCP: / EFFICACY: 69.8lm/W		MODEL: AES2SC-27EL230BK BEAM ANGLE: 21 ° POWER: 29.8W LUMENS: 2251lm CBCP: / EFFICACY: 75.4lm/W
	MODEL: AES2SC-27EL330BK BEAM ANGLE: 32.7 ° POWER: 29.8W LUMENS: 2126.4lm CBCP: / EFFICACY: 71.4lm/W		


SLANA - MODEL: AES2M

Surface Mounted Luminaires



PROJECT:

TYPE:

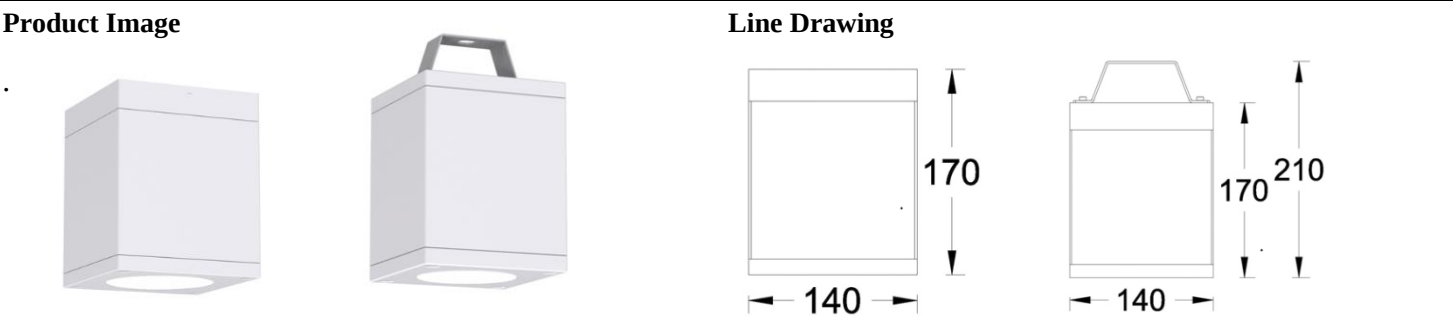

Product Description

The Slana 6 "square surface mounted downlights are more decorative in building lighting, using ceiling mounted and U-shaped bracket installation. The exquisite and meticulous appearance and structural design, excellent optical performance, and flexible humanized accessories can bring users a perfect lighting environment experience, suitable for functional lighting in public spaces.

Product Features		Product Specifications	
• Body Material:	Die cast aluminum alloy end caps and aluminum alloy lamp bodies	• LED Type:	COB
• Optical System:	Efficient and low glare TIR lens with special design	• LED Power:	32W (Max)
• Finish:	Static electricity powder coating	• Source Lm:	3000K:4571lm;4000K:4710lm
• Adjustable Angle:	/	• LED Lifetime:	>50000h-L70 /B10-Ta25°C(LM-80/TM-21)
• Accessories:	/	• CCT/CRI:	3000K/4000K, Ra80
• Certification:	CCC	• LED SDCM	≤3
• IP Rating:	IP65	• Input:	220V AC/50Hz
• Insulation Level:	Class I	• Dimming:	ON-OFF/0-10V
• Operating Temperature:	-20°C~50°C	• Net Weight:	2.5Kg without packing

Order Model

Model	Comment	Power (W)	LEDs (quantity)	Max Lumens (lm)	Control Systems	Beam	CCT	Finish
AES2M	U U-Shape Bracket C Ceiling Mounted	36 32(Max)	COB	2783	EL ON-OFF 220V AC Power Supply	1 16° 2 30° 4 40°	30 3000K	WT White
					DL 0-10V Dimming 220V AC Power Supply		40 4000K	BK Black

Example: AES2MU-36EL130WT

SLANA - MODEL: AES2M

Surface Mounted Luminaires



PROJECT:

TYPE:

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

	MODEL: AES2MC-36EL130BK BEAM ANGLE: 15.9 ° POWER: 36.9W LUMENS: 2741.2lm CBCP: / EFFICACY: 74.3lm/W		MODEL: AES2MC-36EL230BK BEAM ANGLE: 31.7 ° POWER: 36.8W LUMENS: 2705.6lm CBCP: / EFFICACY: 73.6lm/W
	MODEL: AES2MC-36EL430BK BEAM ANGLE: 42.8 ° POWER: 36.7W LUMENS: 2783.3lm CBCP: / EFFICACY: 75.9lm/W		