


ELANA PRO - MODEL: AMTH36
3"Infinity Recessed Combination Luminaire




PROJECT:

TYPE:

Product Image

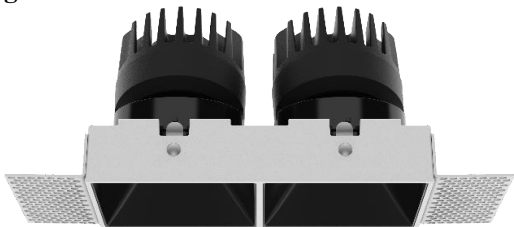

Line Drawing

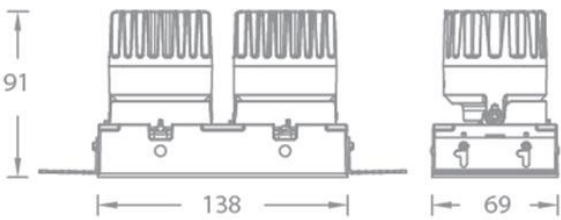

Product Description

ELANA Pro square edge built-in combination lamps, perfect integration of downlighting and Angle adjustment functions. Precise light distribution through the lens, coupled with high-quality reflectors, provides a comfortable visual experience and ensures the integrity of the light spot. Especially suitable for high-end hotels, commercial and office public space.

Product Features

• Body Material:	Aluminum alloy die-casting
• Optical System:	Lens+ reflector optical system
• Finish:	Static electricity powder coating
• Adjustable Angle:	Vertical 0~25°, Horizontal 0~355°
• Accessories:	As attached
• Certification:	CCC
• IP Rating:	IP20
• Insulation Level:	Class II
• Operating Temperature:	-20°C~40°C

Product Specifications

• Cut-out:	□ 146*72 mm
• Ceiling Thickness	6mm~25mm
• Shielding Angle:	40°
• LED Type:	COB LED
• Source Lm:	The single lamp parameters are as follows, and the total luminous flux of the dual lamp combination is twice that 2700K 7W 758lm; 10W 1080lm; 13W 1404lm 3000K 7W 800lm; 10W 1150lm; 13W 1495lm 4000K 7W 850lm; 10W 1210lm; 13W 1573lm
• LED Lifetime:	>50000h-L70 /B10-Ta25°C(LM-80/TM-21)
• CCT/CRI:	2700K/ 3000K/4000K, Ra90
• SDCM:	3 SDCM
• Input:	220V~240V AC / 50Hz
• Dimming:	On-off / 0-10V /DALI
• Net Weight:	0.7Kg without packing

ELANA PRO - MODEL: AMTH36

3"Infinity Recessed Combination Luminaire



PROJECT:

TYPE:

Order Model

Model	Size	Trim	LED	Driver	Beam	CCT	Reflector	Finish
AMTH Multiple Downlight H series	3 3"	6 Rectangular Trimless	207 COB 2*7W	E ON-OFF D 0-10V Dimming	1 15°	27 2700K	S Specular	WT White
			210 COB 2*10W		2 24°	30 3000K	B Black	
			213 COB 2*13W		3 36°	40 4000K		
			213 COB 2*13W	N No Driver A DALI	4 45°			

Example: AMTH36-210E230SWT

Note: 15° factory comes with honeycomb, other angles do not bring

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA


	MODEL:AMTH36-207E130SWT BEAM ANGLE:15° POWER:2*9W LUMENS:2*351lm CBCP:2*3436cd EFFICACY:39lm/W		MODEL:AMTH36-210E130SWT BEAM ANGLE:15° POWER:2*11W LUMENS:2*446lm CBCP:2*4366cd EFFICACY:41lm/W
	MODEL:AMTH36-213E130SWT BEAM ANGLE:15° POWER:2*15W LUMENS:2*562lm CBCP:2*5501cd EFFICACY:37lm/W		MODEL:AMTH36-207E230SWT BEAM ANGLE:24° POWER:2*9W LUMENS:2*662lm CBCP:2*2893cd EFFICACY:74lm/W
	MODEL:AMTH36-210E230SWT BEAM ANGLE:24° POWER:2*11W LUMENS:2*841lm CBCP:2*3675cd EFFICACY:76lm/W		MODEL:AMTH36-213E230SWT BEAM ANGLE:24° POWER:2*15W LUMENS:2*1059lm CBCP:2*4631cd EFFICACY:71lm/W

ELANA PRO - MODEL: AMTH36
3"Infinity Recessed Combination Luminaire




PROJECT:


TYPE:




MODEL:	AMTH36-207E330SWT
BEAM ANGLE:	36°
POWER:	2*9W
LUMENS:	2*564lm
CBCP:	2*1567cd
EFFICACY:	81lm/W




MODEL:	AMTH36-210E330SWT
BEAM ANGLE:	36°
POWER:	2*11W
LUMENS:	2*716lm
CBCP:	2*1991cd
EFFICACY:	65lm/W




MODEL:	AMTH36-213E330SWT
BEAM ANGLE:	36°
POWER:	2*15W
LUMENS:	2*902lm
CBCP:	2*2508cd
EFFICACY:	60lm/W



MODEL:	AMTH36-207E430SWT
BEAM ANGLE:	45°
POWER:	2*9W
LUMENS:	2*497lm
CBCP:	2*886cd
EFFICACY:	55lm/W



MODEL:	AMTH36-210E430SWT
BEAM ANGLE:	45°
POWER:	2*11W
LUMENS:	2*632lm
CBCP:	2*1126cd
EFFICACY:	57lm/W



MODEL:	AMTH36-213E430SWT
BEAM ANGLE:	45°
POWER:	2*15W
LUMENS:	2*796lm
CBCP:	2*1419cd
EFFICACY:	53lm/W