

SILO FOCUS - MODEL: AME15FLM

Surface Mounted Luminaires

WAC LIGHTING

Responsible Lighting®


PRODUCT

TYPE:

Product Image



Line Drawing

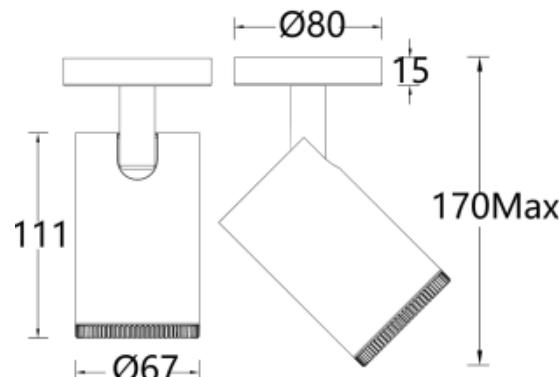

Product Description

SILO Focus series LED ceiling spotlights, exquisite appearance design, no visible radiator, made of die-cast aluminum lamp body, built-in stepless drive electrical, using COB light module, can be stepless adjustment of light Angle, and the appearance size remains unchanged, can provide key lighting or environmental lighting. Widely used in various commercial Spaces, exhibition halls, hotels, retail and other places.

Product Features

- Body Material:** Aluminum alloy die-cast lamp body
- Optical System:** Pancratic lens
- Finish:** Electrostatic Powder coating, Black (BK), White (WT)
- Adjustable Angle:** Level 0°~355° adjustment; Vertical adjustment 0~90°
- Accessories:** Up to three optical accessories can be added, and only one of each type of accessories can be added at the same time
- Certification:** CCC
- IP Rating:** IP20
- Insulation Level:** Class I
- Operating Temperature:** -20°C~40°C
- Net Weight:** Approx. 0.5Kg, without packaging

Product specification

- LED Type:** COB
- Power:** 6W or 12W optional
- Source Lm:** 2700K: 610lm (6W) / 1090lm (12W)
3000K: 670lm (6W) / 1200lm (12W)
4000K: 720lm (6W) / 1290lm (12W)
5000K: 770lm (6W) / 1380lm (12W)
- LED Life:** >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- CCT/CRI:** 2700K / 3000K / 4000K / 5000K, >Ra90
- SDCM:** 3 SDCM
- Input:** 220V~240V AC / 50Hz
- Dimming:** Built-in knob dimming (dimming range 10%~100%) or 0-10V dimming (match test must be done with the project site in advance)

Order Model

Model	LED	Dimming	Beam	CRI	CCT	Finish
AME15F SILO Focus	LM06 COB 6W LM12 COB 12W	O On-board D 0-10V	F 12~50°	9 90	27 2700K 30 3000K 40 4000K 50 5000K	WT White BK Black
AME15F	LM12	O	F	9	30	WT

Example: AME15FLM12-O-F90WT

WAC Lighting

www.waclighting.com (US)

www.waclighting.com.cn (China)

Headquarters

44 Harbor Park Drive • Port Washington, NY

Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)

14,Lane 299, Bi Sheng Road,Shanghai 201204

Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

SILO FOCUS - MODEL: AME15FLM

Surface Mounted Luminaires

WAC LIGHTING

Responsible Lighting®

PRODUCT


TYPE:

Accessories


First class fittings	Striped glass lens ALENS-16-BEL-C		Soft glass lenses ALENS-16-BSL-SW		Frosted glass lenses ALENS-16-FR		The endless bee net grid ALENS-16-HCL	
Second class fittings	Anti-glare tube ALENS-15-SNOOT							
Third class fittings	Four leaf shade ATL-21-BD-SW							

Note: Up to three optical accessories can be added, and each type of accessories can only be added one at a time


LIGHT DISTRIBUTION @3000K DATA




MODEL:	AME15FLM06-OF930
BEAM ANGLE:	12°
POWER:	8W
LUMENS:	183lm
CBCP:	2395cd
EFFICACY:	23lm/W



MODEL:	AME15FLM06-OF930
BEAM ANGLE:	50°
POWER:	8W
LUMENS:	291lm
CBCP:	424cd
EFFICACY:	36lm/W



MODEL:	AME15FLM12-OF930
BEAM ANGLE:	12°
POWER:	14W
LUMENS:	272lm
CBCP:	3187cd
EFFICACY:	19lm/W



MODEL:	AME15FLM12-OF930
BEAM ANGLE:	50°
POWER:	14W
LUMENS:	425lm
CBCP:	616cd
EFFICACY:	30lm/W

WAC Lighting

www.waclighting.com (US)

www.waclighting.com.cn (China)

Headquarters

44 Harbor Park Drive • Port Washington, NY

Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)

14,Lane 299, Bi Sheng Road,Shanghai 201204

Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

SILO FOCUS - MODEL: AME16FLM

Surface Mounted Luminaires

WAC LIGHTING

Responsible Lighting®


PRODUCT

TYPE:

Product Image



Line Drawing

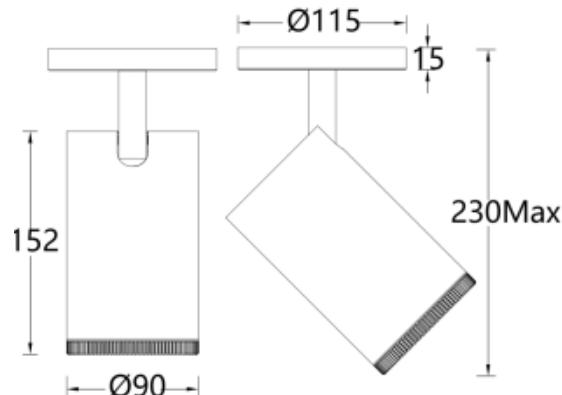

Product Description

SILO Focus series LED ceiling spotlights, exquisite appearance design, no visible radiator, made of die-cast aluminum lamp body, built-in stepless drive electrical, using COB light module, can be stepless adjustment of light Angle, and the appearance size remains unchanged, can provide key lighting or environmental lighting. Widely used in various commercial Spaces, exhibition halls, hotels, retail and other places.

Product Features

- Body Material:** Aluminum alloy die-cast lamp body
- Optical System:** Pancratic lens
- Finish:** Electrostatic Powder coating, Black (BK), White (WT)
- Adjustable Angle:** Level 0°~355° adjustment; Vertical adjustment 0~90°
- Accessories:** Up to three optical accessories can be added, and only one of each type of accessories can be added at the same time
- Certification:** CCC
- IP Rating:** IP20
- Insulation Level:** Class I
- Operating Temperature:** -20°C~40°C
- Net Weight:** Approx. 1.0Kg, without packaging

Product specification

- LED Type:** COB
- Power:** 18W or 26W optional
- Source Lm:** 2700K: 1550lm (18W) / 2270lm (26W)
3000K: 1700lm (18W) / 2500lm (26W)
4000K: 1820lm (18W) / 2670lm (26W)
5000K: 1950lm (18W) / 2870lm (26W)
- LED Life:** >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- CCT/CRI:** 2700K / 3000K / 4000K / 5000K, >Ra90
- SDCM:** 3 SDCM
- Input:** 220V~240V AC / 50Hz
- Dimming:** Built-in knob dimming (dimming range 10%~100%) or 0-10V dimming (match test must be done with the project site in advance)

Model	LED	Dimming	Beam	CRI	CCT	Finish
AME16F SILO Focus	LM18 COB 18W	O On-board A DALI D 0-10V	F 12~50°	9 90	27 2700K 30 3000K 40 4000K 50 5000K	WT White BK Black
	LM26 COB 26W					
AME16F	LM18	O	F	9	30	WT

Example: AME16FLM18-OF930WT

WAC Lighting

www.waclighting.com (US)

www.waclighting.com.cn (China)

Headquarters

44 Harbor Park Drive • Port Washington, NY

Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)

14,Lane 299, Bi Sheng Road, Shanghai 201204

Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

SILO FOCUS - MODEL: AME16FLM

Surface Mounted Luminaires

WAC LIGHTING

Responsible Lighting®

PRODUCT


TYPE:

Accessories


First class fittings	Striped glass lens ALENS-73-BEL-C		Soft glass lenses ALENS-73-BSL		Frosted glass lenses ALENS-73-FR		The endless bee net grid ALENS-73-HCL-C	
Second class fittings	Anti-glare tube ALENS-20-SNOOT				Anti-glare bee-net grille ALENS-20-HCL			
Third class fittings	Four leaf shade ALENS-73-BD							

Note: Up to three optical accessories can be added, and each type of accessories can only be added one at a time


LIGHT DISTRIBUTION @3000K DATA




MODEL:	AME16FLM18-OF930
BEAM ANGLE:	12°
POWER:	21W
LUMENS:	319lm
CBCP:	4670cd
EFFICACY:	15lm/W



MODEL:	AME16FLM18-OF930
BEAM ANGLE:	50°
POWER:	21W
LUMENS:	463lm
CBCP:	689cd
EFFICACY:	22lm/W



MODEL:	AME16FLM26-OF930
BEAM ANGLE:	12°
POWER:	30W
LUMENS:	439lm
CBCP:	5859cd
EFFICACY:	15lm/W



MODEL:	AME16FLM26-OF930
BEAM ANGLE:	50°
POWER:	30W
LUMENS:	639lm
CBCP:	952cd
EFFICACY:	21lm/W

WAC Lighting

[www.waclighting.com \(US\)](http://www.waclighting.com (US))

[www.waclighting.com.cn \(China\)](http://www.waclighting.com.cn (China))

Headquarters

44 Harbor Park Drive • Port Washington, NY

Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)

14,Lane 299, Bi Sheng Road,Shanghai 201204

Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

SILO FOCUS - MODEL: AME17FLM

Surface Mounted Luminaires

WAC LIGHTING

Responsible Lighting®


PRODUCT

TYPE:

Product Image



Line Drawing

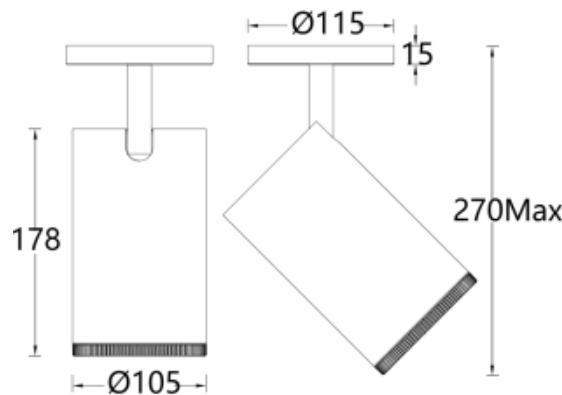

Product Description

SILO Focus series LED ceiling spotlights, exquisite appearance design, no visible radiator, made of die-cast aluminumkels, retail and other places.

Product Features

- Body Material:** Aluminum alloy die-cast lamp body
- Optical System:** panoramic lens
- Finish:** Electrostatic Powder coating, Black (BK), White (WT)
- Adjustable Angle:** Level 0°~355° adjustment; Vertical adjustment 0~90°
- Accessories:** Up to three optical accessories can be added, and only one of each type of accessories can be added at the same time
- Certification:** CCC
- IP Rating:** IP20
- Insulation Level:** Class I
- Operating Temperature:** -20°C~40°C
- Net Weight:** Approx. 1.4Kg, without packaging

Product specification

- LED Type:** COB
- Power:** 34W
- Source Lm:** 3280lm(2700k)/3660lm(3000k)
3880lm (4000K) / 4140lm (5000K)
- LED Life:** >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- CCT/CRI:** 2700K / 3000K / 4000K / 5000K , >Ra90
- SDCM:** 3 SDCM
- Input:** 220V~240V AC / 50Hz
- Dimming:** Built-in knob dimming (dimming range 10%~100%) or 0-10V dimming (match test must be done with the project site in advance)

Order Model

Model	LED	Dimming	Beam	CRI	CCT	Finish
AME17F SILO Focus	LM34 COB 34W	O On-board A DALI D 0-10V	F 12~50°	9 90	27 2700K 30 3000K 40 4000K 50 5000K	WT White BK Black
AME17F	LM34	O	F	9	30	WT

Example: AME17FLM34-OF930WT

WAC Lighting

www.waclighting.com (US)

www.waclighting.com.cn (China)

Headquarters

44 Harbor Park Drive • Port Washington, NY

Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)

14,Lane 299, Bi Sheng Road,Shanghai 201204

Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

SILO FOCUS - MODEL: AME17FLM

Surface Mounted Luminaires

WAC LIGHTING

Responsible Lighting®

PRODUCT


TYPE:

Accessories


First class fittings	Striped glass lens ALENS-73-BEL-C		Soft glass lenses ALENS-73-BSL		Frosted glass lenses ALENS-73-FR		The endless bee net grid ALENS-73-HCL-C	
Second class fittings	Anti-glare tube ALENS-20-SNOOT				Anti-glare bee-net grille ALENS-20-HCL			
Third class fittings	Four leaf shade ATL-22-BD-SW							

Note: Up to three optical accessories can be added, and each type of accessories can only be added one at a time

LIGHT DISTRIBUTION @3000K DATA



MODEL:	AME17FLM34-OF930
BEAM ANGLE:	12°
POWER:	38W
LUMENS:	564lm
CBCP:	6780cd
EFFICACY:	15lm/W



MODEL:	AME17FLM34-OF930
BEAM ANGLE:	50°
POWER:	38W
LUMENS:	813lm
CBCP:	1205cd
EFFICACY:	21lm/W

WAC Lighting

[www.waclighting.com \(US\)](http://www.waclighting.com (US))

[www.waclighting.com.cn \(China\)](http://www.waclighting.com.cn (China))

Headquarters

44 Harbor Park Drive • Port Washington, NY

Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)

14,Lane 299, Bi Sheng Road,Shanghai 201204

Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598