

ELANA PRO - MODEL: ADLH26

2" Square Rimless Recessed Downlight

WAC LIGHTING

Responsible Lighting®

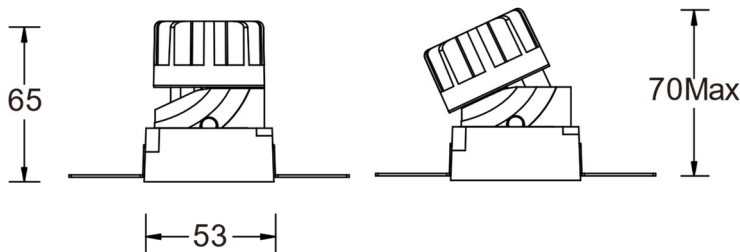
Project Name:

Type:

Product Image



Line Drawing



Product Description

ELANA Pro Square Recessed Downlight is the perfect integration of downlighting and angle adjustment. The precise light distribution through the lens and the high quality reflector provide a comfortable visual experience and ensure the integrity of the light spot. Particularly suitable for high-end hotels, commercial and office public space.

Product Features

- Body Materials:** Aluminum die-cast frame and body
- Optical System:** Lens + Reflector
- Finishes:** Electrostatic powder coating
- Objection Direction:** Vertical 0~25°,Horizontal 0~360°
- Accessory/Bracket:** 15° with honeycomb, others available as an option
- Certification:** CCC
- IP Rating:** IP20
- Insulation Level:** Class II
- Operating Temperature:** -20°C~40°C

Product Specifications

- Opening Size:** Ø60*53mm
- Ceiling Thickness:** 5~15mm
- Shading Angle:** 40°
- LED Type:** COB
- Source Lm:** 2700K 7W 758lm;
3000K 7W 800lm;
4000K 7W 850lm;
- LED Lifetime:** >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- CCT/CRI:** 2700K / 3000K / 4000K, Ra90
- SDCM:** 3 SDCM
- Input:** 220V AC/50Hz
- Dimming:** Non-dimming / 0-10V / DALI (must be tested in advance for compatibility with the project site system)
- Net Weight:** Approx. 0.2Kg, excluding packaging

Order Model

Model	Size	Trim	LED	Driver	Beam	CCT	Reflector	Finish					
ADLH Downlight H series	2 2"	6 Rectangular Trimless	LM05	COB 5W	E	ON-OFF	1	15°	27	2700K	S	Specular	WT
			LM07	COB 7W	D	0-10V Dimming	2	24°	30	3000K	B	Black	White
							3	36°	40	4000K	W	White	BK
							5	50°					
			LM07	COB 7W	N	No Driver							
					A	DALI							

Example: ADLH26-LM07E230SWT

Note: 15°factory honeycomb, other angles do not come with

WAC Lighting
www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting Technology (Shanghai) Co, Ltd.
14,Lane 299, Bi Sheng Road,Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

Project Name:

Type:


Accessory

ALENS-08-HCL
Rimless Honeycomb




NOTE: Required to be ordered separately; the 15° is shipped with a rimless honeycomb grille by default.


Light Distribution Curve @3000K data




MODEL:	ADLH26-LM07E130SWT
BEAM ANGLE:	15°
POWER:	8W
LUMENS:	323lm
CBCP:	3439cd
EFFICACY:	40lm/W



MODEL:	ADLH26-LM07E230SWT
BEAM ANGLE:	24°
POWER:	8W
LUMENS:	519lm
CBCP:	2866cd
EFFICACY:	65lm/W



MODEL:	ADLH26-LM07E330SWT
BEAM ANGLE:	36°
POWER:	8W
LUMENS:	515lm
CBCP:	1304cd
EFFICACY:	64lm/W



MODEL:	ADLH26-LM07E530SWT
BEAM ANGLE:	50°
POWER:	8W
LUMENS:	564lm
CBCP:	898cd
EFFICACY:	71lm/W

ELANA PRO - MODEL: ADLH36

3" Square Rimless Recessed Downlight

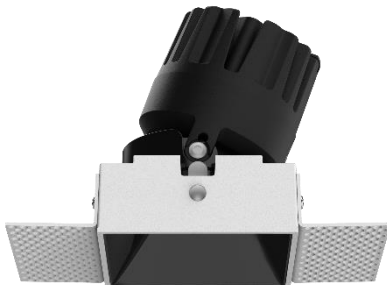
WAC LIGHTING

Responsible Lighting®


Product Name:

Type:

Product Image



Line Drawing

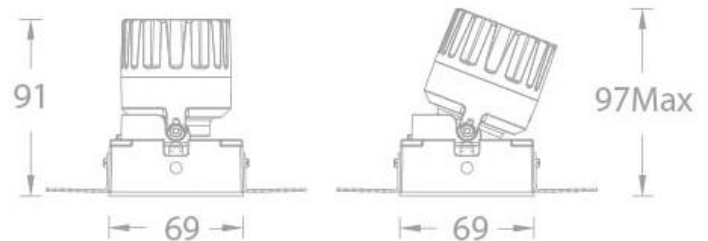

Product Description

ELANA Pro Square Recessed Downlight is the perfect integration of downlighting and angle adjustment. The precise light distribution through the lens and the high quality reflector provide a comfortable visual experience and ensure the integrity of the light spot. Particularly suitable for high-end hotels, commercial and office public space.

Product Features

- **Body Materials:** Aluminum die-cast frame and body
- **Optical System:** Lens + Reflector
- **Finishes:** Electrostatic powder coating
- **Objection Direction:** Vertical 0~25°, Horizontal 0~360°
- **Accessory/Bracket:** 15° with honeycomb, others available as an option
- **Certification:** CCC
- **IP Rating:** IP20
- **Insulation Level:** Class II
- **Operating Temperature:** -20°C~40°C

Product Specifications

- **Opening Size:** Ø77*74mm
- **Ceiling Thickness:** 6~15mm
- **Shading Angle:** 40°
- **LED Type:** COB
- **Source Lm:** 2700K 7W 758lm; 10W 1080lm; 13W 1404lm
3000K 7W 800lm; 10W 1150lm; 13W 1495lm
4000K 7W 850lm; 10W 1210lm; 13W 1573lm
- **LED Lifetime:** >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 2700K / 3000K / 4000K, Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V AC/50Hz
- **Dimming:** Non-dimming / 0-10V / DALI (must be tested in advance for compatibility with the project site system)
- **Net Weight:** Approx. 0.3Kg, excluding packaging

Order Model

Model	Size	Trim	LED	Driver	Beam	CCT	Reflector	Finish
ADLH Downlight H series	3 3"	6 Rectangular Trimless	LM07 COB 7W	E ON-OFF D 0-10V Dimming	1 15°	27 2700K	S Specular	WT White
			LM10 COB 10W		2 24°	30 3000K	B Black	
			LM13 COB 13W		3 36°	40 4000K		
			LM13 COB 13W	N No Driver A DALI	4 45°			

Example: ADLH36-LM10E230SWT

Note: 15°factory honeycomb, other angles do not come with

WAC Lighting
www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting Technology (Shanghai) Co, Ltd.
14, Lane 299, Bi Sheng Road, Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

ELANA PRO - MODEL: ADLH36

WAC LIGHTING

Responsible Lighting®

3" Square Rimless Recessed Downlight











Project Name:

Type:

Accessory

/

Light Distribution Curve @3000K data

	MODEL: ADLH31-LM07E130SWT BEAM ANGLE: 15° POWER: 9W LUMENS: 351lm CBCP: 3436cd EFFICACY: 39lm/W		MODEL: ADLH31-LM10E130SWT BEAM ANGLE: 15° POWER: 11W LUMENS: 446lm CBCP: 4366cd EFFICACY: 41lm/W
	MODEL: ADLH31-LM13E130SWT BEAM ANGLE: 15° POWER: 15W LUMENS: 562lm CBCP: 5501cd EFFICACY: 37lm/W		MODEL: ADLH31-LM07E230SWT BEAM ANGLE: 24° POWER: 9W LUMENS: 662lm CBCP: 2893cd EFFICACY: 74lm/W
	MODEL: ADLH31-LM10E230SWT BEAM ANGLE: 24° POWER: 11W LUMENS: 841lm CBCP: 3675cd EFFICACY: 76lm/W		MODEL: ADLH31-LM13E230SWT BEAM ANGLE: 24° POWER: 15W LUMENS: 1059lm CBCP: 4631cd EFFICACY: 71lm/W
	MODEL: ADLH31-LM07E330SWT BEAM ANGLE: 36° POWER: 9W LUMENS: 564lm CBCP: 1567cd EFFICACY: 81lm/W		MODEL: ADLH31-LM10E330SWT BEAM ANGLE: 36° POWER: 11W LUMENS: 716lm CBCP: 1991cd EFFICACY: 65lm/W
	MODEL: ADLH31-LM13E330SWT BEAM ANGLE: 36° POWER: 15W LUMENS: 902lm CBCP: 2508cd EFFICACY: 60lm/W		MODEL: ADLH31-LM07E430SWT BEAM ANGLE: 45° POWER: 9W LUMENS: 497lm CBCP: 886cd EFFICACY: 55lm/W

WAC Lighting
www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting Technology (Shanghai) Co, Ltd.
14, Lane 299, Bi Sheng Road, Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598


ELANA PRO - MODEL: ADLH36

WAC LIGHTING
Responsible Lighting®


3" Square Rimless Recessed Downlight

Project Name:

Type:



MODEL:	ADLH31-LM10E430SWT
BEAM ANGLE:	45°
POWER:	11W
LUMENS:	632lm
CBCP:	1126cd
EFFICACY:	57lm/W



MODEL:	ADLH31-LM13E430SWT
BEAM ANGLE:	45°
POWER:	15W
LUMENS:	796lm
CBCP:	1419cd
EFFICACY:	53lm/W