

ELANA PRO - MODEL: ADLH3

3" square narrow-edge Recessed Downlight




PROJECT:

TYPE:

Product Image



Line Drawing

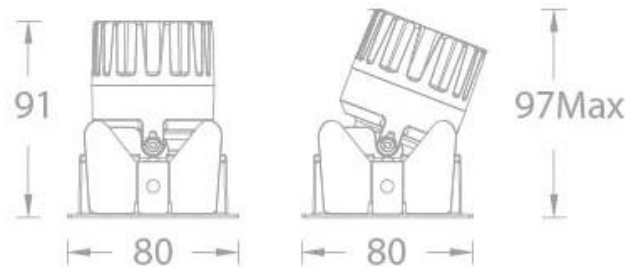

Product Description

ELANA Pro square narrow-edge recessed downlights, perfect integration of down lighting and angle adjustment functions, allowing you to no longer worry about selection. By using lenses for precise light distribution and paired with high-quality reflectors, it provides a comfortable visual experience and ensures the integrity of the light spot. Especially suitable for high-end hotels, commercial and office public spaces.

Product Features

- **Body Material:** Aluminum alloy die-casting(Face frame and lamp body)
- **Optical System:** Lens+ Reflectors
- **Finish:** Static electricity powder coating
- **Adjustable Angle:** Vertical 0~25°, horizontal 0~355°
Built-in honeycomb(when 15° light)
- **Accessories:** CCC
- **Certification:** IP20
- **IP Rating:** Class II
- **Insulation Level:** -20°C~40°C
- **Operating Temperature:**

Product Specifications

- **Cut-out:** □75*75mm
- **Ceiling** 6~15mm
- **Thickness:** 40°
- **Shielding Angle:** COB
- **LED Type:** 2700K 7W 758lm; 10W 1080lm; 13W 1404lm
3000K 7W 800lm; 10W 1150lm; 13W 1495lm
- **Source Lm:** 4000K 7W 850lm; 10W 1210lm; 13W 1573lm
- **LED Lifetime:** >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI** 2700K / 3000K / 4000K, Ra90
- **SDCM** 3 SDCM
- **Input:** 220V AC/50Hz
- **Dimming:** On-off / 0-10V / DALI(Must conduct compatibility testing with the project site system in advance)
- **Net Weight:** About 0.3Kg excluding packaging

Order Model

Model	Size	Trim	LED	Driver	Beam	CCT	Reflector	Finish
ADLH Downlight H series	3 3"	5 Rectangular Trim	LM07 COB 7W	E ON-OFF D 0-10V Dimming	1 15°	27 2700K	S Specular B Black	WT White
			LM10 COB 10W		2 24°	30 3000K		
			LM13 COB 13W		3 36°	40 4000K		
			LM13 COB 13W	N No Driver A DALI	4 45°			

Example: ADLH35-LM10E230SWT

Note: The 15 ° light comes with a honeycomb when it leaves the factory, while other angle lights do not come with a honeycomb when they leave the factory.

ELANA PRO - MODEL: ADLH35

3" square narrow-edge Recessed Downlight




PROJECT:

TYPE:


Accessory

/


LIGHT DISTRIBUTION@3000K LUMINAIRE DATA




MODEL:	ADLH35-LM07E130SWT
BEAM ANGLE:	15°
POWER:	9W
LUMENS:	351lm
CBCP:	3436cd
EFFICACY:	39lm/W




MODEL:	ADLH35-LM10E130SWT
BEAM ANGLE:	15°
POWER:	11W
LUMENS:	446lm
CBCP:	4366cd
EFFICACY:	41lm/W




MODEL:	ADLH35-LM13E130SWT
BEAM ANGLE:	15°
POWER:	15W
LUMENS:	562lm
CBCP:	5501cd
EFFICACY:	37lm/W




MODEL:	ADLH35-LM07E230SWT
BEAM ANGLE:	24°
POWER:	9W
LUMENS:	662lm
CBCP:	2893cd
EFFICACY:	74lm/W




MODEL:	ADLH35-LM10E230SWT
BEAM ANGLE:	24°
POWER:	11W
LUMENS:	841lm
CBCP:	3675cd
EFFICACY:	76lm/W




MODEL:	ADLH35-LM13E230SWT
BEAM ANGLE:	24°
POWER:	15W
LUMENS:	1059lm
CBCP:	4631cd
EFFICACY:	71lm/W




MODEL:	ADLH35-LM07E330SWT
BEAM ANGLE:	36°
POWER:	9W
LUMENS:	564lm
CBCP:	1567cd
EFFICACY:	81lm/W



MODEL:	ADLH35-LM10E330SWT
BEAM ANGLE:	36°
POWER:	11W
LUMENS:	716lm
CBCP:	1991cd
EFFICACY:	65lm/W



MODEL:	ADLH35-LM13E330SWT
BEAM ANGLE:	36°
POWER:	15W
LUMENS:	902lm
CBCP:	2508cd
EFFICACY:	60lm/W



MODEL:	ADLH35-LM07E430SWT
BEAM ANGLE:	45°
POWER:	9W
LUMENS:	497lm
CBCP:	886cd
EFFICACY:	55lm/W

WAC Lighting
www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting Technology (Shanghai) Co, Ltd.
14, Lane 299, Bi Sheng Road, Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598


ELANA PRO - MODEL: ADLH35

3" square narrow-edge Recessed Downlight




PROJECT:

TYPE:



MODEL:	ADLH35-LM10E430SWT
BEAM ANGLE:	45°
POWER:	11W
LUMENS:	632lm
CBCP:	1126cd
EFFICACY:	57lm/W



MODEL:	ADLH35-LM13E430SWT
BEAM ANGLE:	45°
POWER:	15W
LUMENS:	796lm
CBCP:	1419cd
EFFICACY:	53lm/W


ELANA PRO - MODEL: ADLH36

3" square narrow-edge Recessed Downlight



PROJECT:

TYPE:

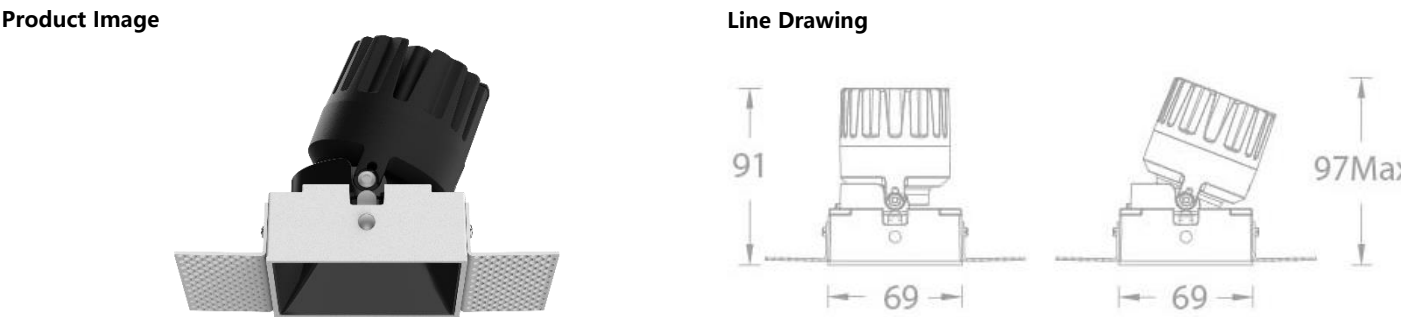

Product Features

ELANA Pro square narrow-edge recessed downlights, perfect integration of down lighting and angle adjustment functions, allowing you to no longer worry about selection. By using lenses for precise light distribution and paired with high-quality reflectors, it provides a comfortable visual experience and ensures the integrity of the light spot. Especially suitable for high-end hotels, commercial and office public spaces.

Product Features

- **Body Material:** Aluminum alloy die-casting(Face frame and lamp body)
- **Optical System:** Lens+ Reflectors
- **Finish:** Static electricity powder coating
- **Adjustable Angle:** Vertical 0~25°, horizontal 0~355°
Built-in honeycomb(when 15° light)
- **Accessories:**
- **Certification:** CCC
- **IP Rating:** IP20
- **Insulation Level:** Class II
- **Operating Temperature:** -20°C~40°C

Product Specifications

- **Cut-out:** □77*74mm
- **Ceiling Thickness:** 6~15mm
- **Shielding Angle:** 40°
- **LED Type:** COB
- **Source Lm:** 2700K 7W 758lm; 10W 1080lm; 13W 1404lm
3000K 7W 800lm; 10W 1150lm; 13W 1495lm
4000K 7W 850lm; 10W 1210lm; 13W 1573lm
- **LED Lifetime:** >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI** 2700K / 3000K / 4000K, Ra90
- **SDCM** 3 SDCM
- **Input:** 220V AC/50Hz
- **Dimming:** On-off / 0-10V / DALI(Must conduct compatibility testing with the project site system in advance)
- **Net Weight:** About 0.3Kg excluding packaging

Order Model

Model	Size	Trim	LED	Driver	Beam	CCT	Reflector	Finish
ADLH Downlight H series	3 3"	6 Rectangular Trimless	LM07 COB 7W	E ON-OFF D 0-10V Dimming	1 15°	27 2700K	S Specular	WT White
			LM10 COB 10W		2 24°	30 3000K	B Black	
			LM13 COB 13W		3 36°	40 4000K		
			LM13 COB 13W	N No Driver A DALI	4 45°			

Example: ADLH36-LM10E230SWT

Note: The 15 ° light comes with a honeycomb when it leaves the factory, while other angle lights do not come with a honeycomb when they leave the factory.

ELANA PRO - MODEL: ADLH36

3" square narrow-edge Recessed Downlight




PROJECT:

TYPE:


Accessory

/


LIGHT DISTRIBUTION@3000K LUMINAIRE DATA




MODEL:	ADLH31-LM07E130SWT
BEAM ANGLE:	15°
POWER:	9W
LUMENS:	351lm
CBCP:	3436cd
EFFICACY:	39lm/W




MODEL:	ADLH31-LM10E130SWT
BEAM ANGLE:	15°
POWER:	11W
LUMENS:	446lm
CBCP:	4366cd
EFFICACY:	41lm/W




MODEL:	ADLH31-LM13E130SWT
BEAM ANGLE:	15°
POWER:	15W
LUMENS:	562lm
CBCP:	5501cd
EFFICACY:	37lm/W




MODEL:	ADLH31-LM07E230SWT
BEAM ANGLE:	24°
POWER:	9W
LUMENS:	662lm
CBCP:	2893cd
EFFICACY:	74lm/W




MODEL:	ADLH31-LM10-E230SWT
BEAM ANGLE:	24°
POWER:	11W
LUMENS:	841lm
CBCP:	3675cd
EFFICACY:	76lm/W




MODEL:	ADLH31-LM13E230SWT
BEAM ANGLE:	24°
POWER:	15W
LUMENS:	1059lm
CBCP:	4631cd
EFFICACY:	71lm/W




MODEL:	ADLH31-LM07-E330SWT
BEAM ANGLE:	36°
POWER:	9W
LUMENS:	564lm
CBCP:	1567cd
EFFICACY:	81lm/W



MODEL:	ADLH31-LM10E330SWT
BEAM ANGLE:	36°
POWER:	11W
LUMENS:	716lm
CBCP:	1991cd
EFFICACY:	65lm/W



MODEL:	ADLH31-LM13-E330SWT
BEAM ANGLE:	36°
POWER:	15W
LUMENS:	902lm
CBCP:	2508cd
EFFICACY:	60lm/W



MODEL:	ADLH31-LM07E430SWT
BEAM ANGLE:	45°
POWER:	9W
LUMENS:	497lm
CBCP:	886cd
EFFICACY:	55lm/W

WAC Lighting
www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting Technology (Shanghai) Co, Ltd.
14, Lane 299, Bi Sheng Road, Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598


ELANA PRO - MODEL: ADLH36

3" square narrow-edge Recessed Downlight




PROJECT:

TYPE:



MODEL:	ADLH31-LM10E430SWT
BEAM ANGLE:	45°
POWER:	11W
LUMENS:	632lm
CBCP:	1126cd
EFFICACY:	57lm/W



MODEL:	ADLH31-LM13E430SWT
BEAM ANGLE:	45°
POWER:	15W
LUMENS:	796lm
CBCP:	1419cd
EFFICACY:	53lm/W