

ULTRA – MODEL:ASLN36

Ceiling Mount Luminaires

WAC


PROJECT:

TYPE:

Product Image



Line Drawing

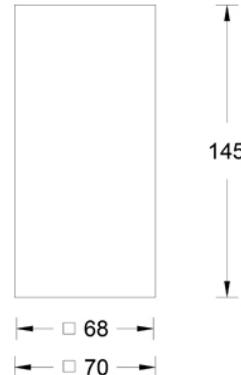

Product Description

ULTRA series LED square exposed tube lamp adopts a modular design, and the on-site lamps can be freely disassembled and replaced with reflectors and lamp bodies, thereby achieving free switching of various specifications and lighting methods. In terms of optics, a brand new hidden light technology is adopted, which has good anti glare performance and color consistency control, and has a comfortable lighting effect. It is mainly suitable for indoor places such as hotels, villas, and commercial spaces.

Product Features

- Body Material: Aluminum alloy die-casting lamp body
- Optical System: Lens +Anti-glare reflector
- Finish: Electrostatic powder coating
- Projection direction: /
- Accessories: See accessory list
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class II
- Operating Temperature: -20°C~40°C
- Product weight: About 0.36kg, excluding packaging
- Shielding angle: 35°

Product Specifications

- LED Type: COB
- Source Lm:
 - 2700K: 8W 682lm; 7W 758lm; 10W 1080lm; 13W 1404lm
 - 3000K: 8W 720lm; 7W 800lm; 10W 1150lm; 13W 1495lm
 - 3500K: 8W 752lm; 7W 835lm; 10W 1195lm; 13W 1554lm
 - 4000K: 8W 765lm; 7W 850lm; 10W 1210lm; 13W 1573lm
 - 5000K: 8W 774lm; 7W 860lm; 10W 1220lm; 13W 1586lm
- LED Lifetime: >36000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K/3000K/3500K/4000K/5000K, CRI≥Ra90
- Input: 220V AC / 50Hz
- Dimming: No dimming/0-10V(Matching testing needs to be done in advance)

Order Model

| Model | Size | Trim | LED | Driver | Beam | CCT | Reflector | Finish |
|-------------|--------------|-------------|---------------------|-----------------|--------------|-----------------|-------------------|-----------------|
| ASLN | | | LM08 COB 8W | | S 8° | | | |
| Surface | | | | | N 13° | 27 2700K | | |
| Mounted | 3 3 " | 6 | LM07 COB 7W | E On-Off | 1 18° | 30 3000K | | |
| Downlight | | Rectangular | LM10 COB 10W | D 0-10V | 2 28° | 35 3500K | B Black | WT White |
| N series | | Trimless | LM13 COB 13W | Dimming | 3 36° | 40 4000K | S Specular | BK Black |
| | | | | | 5 50° | 50 5000K | | |

Example: ASLN36-LM07EN30SWT

NOTE: 8°, 13° and 18° factory default with honeycomb grille.

ULTRA- MODEL: ASLN36

Ceiling Mount Luminaires

WAC LIGHTING

Responsible Lighting®

Project Name:


Type:

Accessory


| | | | |
|---|--|--|--|
| ALENS-11-BEL Striped Glass Lens  | ALENS-11-BSL-ULTRA Smooth Glass Lens  | ALENS-11-FR Frosted Glass Lens  | ALENS-11-HCL-ULTRA Rimless Honeycomb  |
|---|--|--|--|

NOTE: Up to one additional optical accessory may be added; the 8°, 13°, and 18° are factory defaulted with a rimless honeycomb grille.


Light Curve Distribution @3000K Data




| | |
|--------------------|--------------------|
| MODEL | ASLN36-LM07EN30SWT |
| BEAM ANGLE: | 13° |
| POWER: | 9W |
| LUMENS: | 466lm |
| CBCP: | 5571cd |
| EFFICACY: | 52lm/W |




| | |
|--------------------|--------------------|
| MODEL | ASLN36-LM10EN30SWT |
| BEAM ANGLE: | 13° |
| POWER: | 11W |
| LUMENS: | 520lm |
| CBCP: | 6220cd |
| EFFICACY: | 47lm/W |




| | |
|--------------------|--------------------|
| MODEL | ASLN36-LM13EN30SWT |
| BEAM ANGLE: | 13° |
| POWER: | 16W |
| LUMENS: | 676lm |
| CBCP: | 8086cd |
| EFFICACY: | 42lm/W |




| | |
|--------------------|--------------------|
| MODEL | ASLN36-LM07E130SWT |
| BEAM ANGLE: | 18° |
| POWER: | 9W |
| LUMENS: | 721lm |
| CBCP: | 5316cd |
| EFFICACY: | 80lm/W |




| | |
|--------------------|--------------------|
| MODEL | ASLN36-LM10E130SWT |
| BEAM ANGLE: | 18° |
| POWER: | 11W |
| LUMENS: | 817lm |
| CBCP: | 6028cd |
| EFFICACY: | 74lm/W |



| | |
|--------------------|--------------------|
| MODEL | ASLN36-LM13E130SWT |
| BEAM ANGLE: | 18° |
| POWER: | 16W |
| LUMENS: | 1062lm |
| CBCP: | 7836cd |
| EFFICACY: | 66lm/W |



| | |
|--------------------|--------------------|
| MODEL | ASLN36-LM07E230SWT |
| BEAM ANGLE: | 28° |
| POWER: | 9W |
| LUMENS: | 715lm |
| CBCP: | 3052cd |
| EFFICACY: | 79lm/W |



| | |
|--------------------|--------------------|
| MODEL | ASLN36-LM10E230SWT |
| BEAM ANGLE: | 28° |
| POWER: | 11W |
| LUMENS: | 796lm |
| CBCP: | 3396cd |
| EFFICACY: | 72lm/W |

ULTRA- MODEL: ASLN36


Ceiling Mount Luminaires

WAC LIGHTING


Responsible Lighting®

Project Name:


Type >




| | |
|--------------------|--------------------|
| MODEL | ASLN36-LM13E230SWT |
| BEAM ANGLE: | 28° |
| POWER: | 15W |
| LUMENS: | 1035lm |
| CBCP: | 4511cd |
| EFFICACY: | 69lm/W |




| | |
|--------------------|--------------------|
| MODEL | ASLN36-LM07E330SWT |
| BEAM ANGLE: | 36° |
| POWER: | 9W |
| LUMENS: | 643lm |
| CBCP: | 1497cd |
| EFFICACY: | 71lm/W |




| | |
|--------------------|--------------------|
| MODEL | ASLN36-LM10E330SWT |
| BEAM ANGLE: | 36° |
| POWER: | 11W |
| LUMENS: | 804lm |
| CBCP: | 1857cd |
| EFFICACY: | 73lm/W |




| | |
|--------------------|--------------------|
| MODEL | ASLN36-LM13E330SWT |
| BEAM ANGLE: | 36° |
| POWER: | 15W |
| LUMENS: | 1024lm |
| CBCP: | 2375cd |
| EFFICACY: | 68lm/W |




| | |
|--------------------|--------------------|
| MODEL | ASLN36-LM07E530SWT |
| BEAM ANGLE: | 50° |
| POWER: | 9W |
| LUMENS: | 425lm |
| CBCP: | 574cd |
| EFFICACY: | 47lm/W |



| | |
|--------------------|--------------------|
| MODEL | ASLN36-LM10E530SWT |
| BEAM ANGLE: | 50° |
| POWER: | 11W |
| LUMENS: | 532lm |
| CBCP: | 717cd |
| EFFICACY: | 48lm/W |



| | |
|--------------------|--------------------|
| MODEL | ASLN36-LM13E530SWT |
| BEAM ANGLE: | 50° |
| POWER: | 15W |
| LUMENS: | 677lm |
| CBCP: | 914cd |
| EFFICACY: | 45lm/W |



| | |
|--------------------|--------------------|
| MODEL | ASLN36-LM08ES30SWT |
| BEAM ANGLE: | 8° |
| POWER: | 10W |
| LUMENS: | 375lm |
| CBCP: | 9280cd |
| EFFICACY: | 38lm/W |