

ELANA - MODEL: ADDG21
2'' Narrow Edge Embedded Downlight


PROJECT :

WAC
TYPE :

Product Image



Line Drawing



Product Description

ELANA series LED narrow edge embedded adjustable angle tube light, perfectly integrated with the ceiling after installation. Good anti-glare performance and color consistency control, with comfortable light output effect, mainly suitable for indoor places such as hotels and clubs.

Product Features

- Body Material: Aluminum alloy die-casting
- Optical System: Lens+ Anti-glare reflector
Reflector surface treatment:
B Black
W White
S Black Mirror
T Black staircase
H White staircase
- Finish: Static electricity powder
- Adjustable Angle: Vertical 0°~25° adjustable
- Accessories: As attached
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class II
- Operating Temperature: -20°C~40°C

Product Specifications

- Cut-out: Ø 55mm
- Ceiling Thickness 5mm~25mm
- Shielding Angle: 35°
- LED Type: COB
- Source Lm:
2700K: 4W 540lm ; 7W 758lm;
3000K: 4W 557lm ; 7W 780lm;
3500K: 4W 578lm ; 7W 810lm;
4000K: 4W 589lm ; 7W 825lm;
5000K: 4W 594lm ; 7W 832lm;
- LED Lifetime: >36000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K/3000K/3500K/4000K/5000K , CRI≥90
- Input: 220V~240V AC / 50Hz
- Dimming: No diming/ 0-10V (Must conduct compatibility testing with the project site system in advance)
- Net Weight: 0.11Kg without packing

Order Model

Model	Size	Trim	LED	Driver	Beam	CCT	Reflector	Finish
ADDG Downlight Directional G series	2 2"	1 Round Trim	LM04 COB 4W	E On-Off	1 15°	27 2700K	B Black	WT
			LM07 COB 7W	D 0-10V Dimming	2 24°	30 3000K	W White	White
					3 36°	35 3500K	S Specular	BK
			LM07 COB 7W	N No Driver	5 50°	40 4000K 50 5000K	T Black Step H White Step	Black


Example : ADDG21-LM07E130SWT

Note: The 15 °and 24° factory default comes with an rimless honeycomb grille.

ELANA - MODEL: ADDG21

2'' Narrow Edge Embedded Downlight

PROJECT :

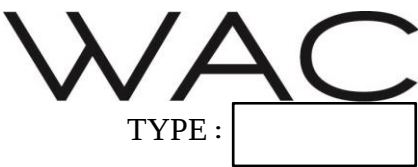


LENS-11-HCL-ELANA


Honeycomb




LIGHT DISTRIBUTION@3000K LUMINAIRE DATA




MODEL :	ADDG21-LM04E130BWT
BEAM ANGLE :	15°
POWER :	5.4W
LUMENS :	233lm
CBCP :	2177cd
EFFICACY :	40lm/W




MODEL :	ADDG21-LM07E130BWT
BEAM ANGLE :	15°
POWER :	8W
LUMENS :	322lm
CBCP :	3134cd
EFFICACY :	40lm/W




MODEL :	ADDG21-LM04E230BWT
BEAM ANGLE :	24°
POWER :	5.4W
LUMENS :	221lm
CBCP :	1354cd
EFFICACY :	40lm/W




MODEL :	ADDG21-LM07E230BWT
BEAM ANGLE :	24°
POWER :	8W
LUMENS :	318lm
CBCP :	1949cd
EFFICACY :	39lm/W




MODEL :	ADDG21-LM04E330BWT
BEAM ANGLE :	36°
POWER :	5.4W
LUMENS :	314lm
CBCP :	711cd
EFFICACY :	57lm/W



MODEL :	ADDG21-LM07E330BWT
BEAM ANGLE :	36°
POWER :	8W
LUMENS :	452lm
CBCP :	1016cd
EFFICACY :	56lm/W



MODEL :	ADDG21-LM04E530BWT
BEAM ANGLE :	50°
POWER :	5.4W
LUMENS :	330lm
CBCP :	468cd
EFFICACY :	60lm/W



MODEL :	ADDG21-LM07E530BWT
BEAM ANGLE :	50°
POWER :	8W
LUMENS :	476lm
CBCP :	674cd
EFFICACY :	59lm/W

ELANA - MODEL: ADDG31

3'' Narrow Edge Embedded Downlight

PROJECT :


WAC

TYPE :

Product Image



Line Drawing



Product Description

The ELANA series LED narrow edge embedded downlight integrates perfectly with the ceiling after installation. Good anti-glare performance and color consistency control, with comfortable light output effect, mainly suitable for indoor places such as hotels and clubs.

Product Features

- Body Material: Aluminum alloy die-casting
- Optical System: Lens+ Anti-glare reflector
- Reflector surface treatment:
 - B Black
 - W White
 - S Black Mirror
 - T Black staircase
 - H White staircase
- Finish: Static electricity powder
- Adjustable Angle: Vertical 0°~25° adjustable
- Accessories: As attached
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class II
- Operating Temperature: -20°C~40°C

Product Specifications

- Cut-out: Ø 75mm
- Ceiling Thickness 5mm~25mm
- Shielding Angle: 35°
- LED Type: COB
- Source Lm:
 - 2700K: 7W 758lm; 10W 1080lm; 13W 1404lm
 - 3000K: 7W 800lm; 10W 1150lm; 13W 1495lm
 - 3500K: 7W 835lm; 10W 1195lm; 13W 1554lm
 - 4000K: 7W 850lm; 10W 1210lm; 13W 1573lm
 - 5000K: 7W 860lm; 10W 1220lm; 13W 1586lm
- LED Lifetime: >36000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K/3000K/3500K/4000K/5000K , CRI≥90
- Input: 220V~240V AC / 50Hz
- Dimming: No diming/ 0-10V (Must conduct compatibility testing with the project site system in advance)
- Net Weight: 0.24Kg without packing

Order Model

Model	Size	Trim	LED	Driver	Beam	CCT	Reflector	Finish
ADDG Downlight Directional G series	3 3"	1 Round Trim	LM07 COB7W	E On-Off	1 15°	27 2700K	B Black	WT
			LM10 COB 10W	D 0-10V	2 24°	30 3000K	W White	White
			LM13 COB 13W	Dimming	3 36°	35 3500K	S Specular	BK
			LM13 COB 13W	N No Driver	5 50°	40 4000K 50 5000K	T Black Step H White Step	Black


Example : ADDG31-LM07E130SWT

Note: The 15 °and 24° factory default comes with rimless honeycomb grille, no honeycomb for other angles.

ELANA - MODEL: ADDG31

3'' Narrow Edge Embedded Downlight

PROJECT :

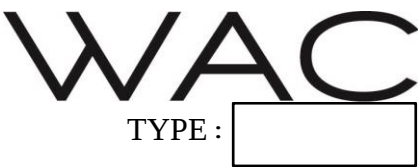


LENS-11-HCL-ELANA


Honeycomb




LIGHT DISTRIBUTION@3000K LUMINAIRE DATA




MODEL :	ADDG31-LM07E130BWT
BEAM ANGLE :	15°
POWER :	8W
LUMENS :	344lm
CBCP :	3767cd
EFFICACY :	43lm/W




MODEL :	ADDG31-LM10 E130BWT
BEAM ANGLE :	15°
POWER :	11W
LUMENS :	462lm
CBCP :	5068cd
EFFICACY :	42lm/W




MODEL :	ADDG31-LM13E130BWT
BEAM ANGLE :	15°
POWER :	15W
LUMENS :	628lm
CBCP :	6881cd
EFFICACY :	41lm/W




MODEL :	ADDG31-LM07E230BWT
BEAM ANGLE :	24°
POWER :	8W
LUMENS :	593lm
CBCP :	2303cd
EFFICACY :	74lm/W




MODEL :	ADDG31-LM10E230BWT
BEAM ANGLE :	24°
POWER :	11W
LUMENS :	798lm
CBCP :	3098cd
EFFICACY :	72lm/W



MODEL :	ADDG31-LM13E230BWT
BEAM ANGLE :	24°
POWER :	15W
LUMENS :	1083lm
CBCP :	4206cd
EFFICACY :	72lm/W



MODEL :	ADDG31-LM07E330BWT
BEAM ANGLE :	36°
POWER :	8W
LUMENS :	593lm
CBCP :	2303cd
EFFICACY :	74lm/W



MODEL :	ADDG31-LM10E330BWT
BEAM ANGLE :	36°
POWER :	11W
LUMENS :	798lm
CBCP :	3098cd
EFFICACY :	72lm/W


ELANA - MODEL: ADDG31

3’’ Narrow Edge Embedded Downlight


PROJECT :

WAC


TYPE :




MODEL :	DDG31-LM13E330BWT
BEAM ANGLE :	36°
POWER :	15W
LUMENS :	1083lm
CBCP :	4206cd
EFFICACY :	72lm/W



MODEL :	DDG31-LM07E530BWT
BEAM ANGLE :	50°
POWER :	8W
LUMENS :	553lm
CBCP :	735cd
EFFICACY :	69lm/W



MODEL :	DDG31-LM10E530BWT
BEAM ANGLE :	50°
POWER :	11W
LUMENS :	744lm
CBCP :	988cd
EFFICACY :	67lm /W



MODEL :	DDG31-LM13E530BWT
BEAM ANGLE :	50°
POWER :	15W
LUMENS :	1010lm
CBCP :	1342cd
EFFICACY :	67lm /W