

PLANA PRO - MODEL: APDL22

Pendant Mount Luminaires

WAC


PROJECT:

TYPE:

Product Image



Line Drawing

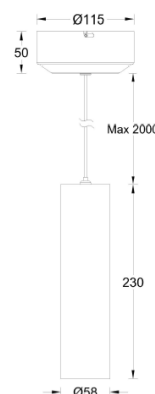

Product Description

PLANA PRO mounted downlight, the whole light is exquisite and simple, with accurate light distribution, using SUBROSA hidden light technology, and has the ultimate anti-glare effect. It is mainly used in hotels and commercial public Spaces.

Product Features

- Body Material: Aluminum alloy die-cast lamp body
- Optical System: Lens +Subrosa hidden light system
- Finish: Electrostatic powder spraying
- Projection direction: /
- Accessories/Brackets: /
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C

Product Specifications

- Shielding Angle: 35°
- LED Type: High Power LED
- Source Lm: 800lm/8W
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/ SDCM: 2700K/ 3000K/ 4000K, Ra90
- Color tolerance of light source: 3 SDCM (4000K 5SDCM)
- Input: 220V~240V AC / 50Hz
- Dimming: 0~10V (must be tested for compatibility with the project site system in advance)
- Net Weight: 1.2Kg without packing

Order Model

Model	Size	Trim	LED	Driver	CCT	Beam	Reflector	Finish
APDL	2	2	LD08	D 0~10V	27 2700K	1 15°	B black	WT white
Pendant	2"	Round	HP LED 8W		30 3000K	2 24°	S specular	BK black
Downlight		Trimless			40 4000K	3 36°		
						4 48°		

Example: APDL22-LD08D302SWT

PLANA PRO - MODEL: APDL22


Pendant Mount Luminaires




PROJECT:

TYPE:


LIGHT DISTRIBUTION@3000K LUMINAIRE DATA




MODEL:	APDL22-LD08D301SWT
BEAM ANGLE:	15°
POWER:	10 W
LUMENS:	521 lm
CBCP:	4577 cd
EFFICACY:	52 lm/W



MODEL:	APDL22-LD08D302SWT
BEAM ANGLE:	24°
POWER:	10 W
LUMENS:	556 lm
CBCP:	3004 cd
EFFICACY:	55 lm/W



MODEL:	APDL22-LD08D303SWT
BEAM ANGLE:	36°
POWER:	10 W
LUMENS:	1182 lm
CBCP:	493 cd
EFFICACY:	493 lm/W



MODEL:	APDL22-LD08D304SWT
BEAM ANGLE:	48°
POWER:	10 W
LUMENS:	464 lm
CBCP:	726 cd
EFFICACY:	46 lm/W

PLANA PRO - MODEL: APDL32

Pendant Mount Luminaires


WAC

PROJECT: TYPE:

Product Image



Line Drawing

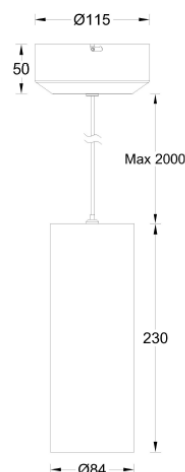

Product Description

PLANA PRO mounted downlight, the whole light is exquisite and simple, with accurate light distribution, using SUBROSA hidden light technology, and has the ultimate anti-glare effect. It is mainly used in hotels and commercial public Spaces.

Product Features

- Body Material: Aluminum alloy die-cast lamp body
- Optical System: Lens +Subrosa hidden light system
- Finish: Electrostatic powder spraying
- Projection direction: /
- Accessories/Brackets: /
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C

Product Specifications

- Shielding Angle: 35°
- LED Type: COB
- Source Lm: 1800lm/18W ; 1300lm/13W
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/ SDCM: 2700K/ 3000K/ 4000K, Ra90
- Color tolerance of light source: 3 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: 0~10V (must be tested for compatibility with the project site system in advance)
- Net Weight: 2Kg without packing

Order Model

Model	Size	Trim	LED	Driver	CCT	Beam	Reflector	Finish
APDL	3	2	LM13	D 0~10V	27 2700K	2 20°	B Black	WT White
Pendant	3"	Round	COB 13W		30 3000K	4 40°	S Specular	BK Black
Downlight		Trimless	LM18		40 4000K	6 60°		
			COB 18W					

Example: APDL32-LM18D302SWT

PLANA PRO - MODEL: APDL32


Pendant Mount Luminaires




PROJECT:

TYPE:


LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



MODEL:	APDL32-LM13D302SWT	APDL32-LM18D302SWT
BEAM ANGLE:	20°	20°
POWER:	15 W	21 W
LUMENS:	861 lm	1200 lm
CBCP:	4155 cd	5842 cd
EFFICACY:	57 lm/W	57 lm/W



MODEL:	APDL32-LM13D304SWT	APDL32-LM18D304SWT
BEAM ANGLE:	40°	40°
POWER:	15 W	21 W
LUMENS:	1013 lm	1366 lm
CBCP:	1974 cd	2628 cd
EFFICACY:	68 lm/W	65 lm/W




MODEL:	APDL32-LM13D306SWT	APDL32-LM18D306SWT
BEAM ANGLE:	60°	60°
POWER:	15 W	21 W
LUMENS:	1172 lm	1617 lm
CBCP:	1438 cd	1967 cd
EFFICACY:	78 lm/W	77 lm/W

PLANA PRO - MODEL: APDL42

Pendant Mount Luminaires

WAC

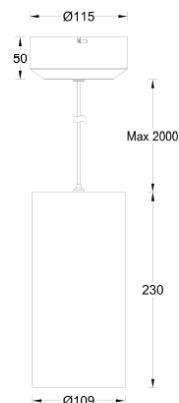PROJECT: TYPE: **Product Image****Line Drawing**

Product Description

PLANA PRO mounted downlight, the whole light is exquisite and simple, with accurate light distribution, using SUBROSA hidden light technology, and has the ultimate anti-glare effect. It is mainly used in hotels and commercial public Spaces.

Product Features

- Body Material: Aluminum alloy die-cast lamp body
- Optical System: Lens +Subrosa hidden light system
- Finish: Electrostatic powder spraying
- Projection direction: /
- Accessories/Brackets: /
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C

Product Specifications

- Shielding Angle: 35°
- LED Type: COB
- Source Lm: 1800lm/18W ; 2500lm/25W
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/ SDCM: 2700K/ 3000K/ 4000K, Ra90
- Color tolerance of light source: 3 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: 0~10V (must be tested for compatibility with the project site system in advance)
- Net Weight: 2.9Kg without packing

Order Model

Model	Size	Trim	LED	Driver	CCT	Beam	Reflector	Finish
APDL Pendant Downlight	4	2	LM18	D 0~10V	27 2700K	2 20°	B Black	WT White
	4"	Round Trimless	COB 18W		30 3000K	4 40°	S Specular	BK Black
			LM25		40 4000K	6 60°		
			COB 25W					

Example: APDL42-LM18D302SWT

PLANA PRO - MODEL: APDL42


Pendant Mount Luminaires

WAC

PROJECT:

TYPE:

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



MODEL: APDL42-LM18D302SWT

APDL42-LM25D302SWT

BEAM ANGLE: 20°

20°

POWER: 21 W

29 W

LUMENS: 1681 lm


2123 lm

CBCP: 8154 cd

10326 cd

EFFICACY: 80 lm/W

73 lm/W



MODEL: APDL42-LM18D304SWT

APDL42-LM25D304SWT

BEAM ANGLE: 40°

40°

POWER: 21 W

29 W

LUMENS: 1404 lm


1827 lm

CBCP: 2604 cd

3422 cd

EFFICACY: 67 lm/W

63 lm/W



MODEL: APDL42-LM18D306SWT

APDL42-LM25D306SWT

BEAM ANGLE: 60°

60°

POWER: 21 W

29 W

LUMENS: 1760 lm

2274 lm

CBCP: 1984 cd

2593 cd

EFFICACY: 84 lm/W

78 lm/W