


Installation Declaration:

1. Please read the manual carefully before installation;
2. Please have a professional electrician perform the installation;
3. To avoid the risk of electric shock, please ensure the power is turned off before installation and maintenance;
4. The fixture can be recessed into the ceiling surface, and sufficient installation space must be reserved. Do not cover the fixture with insulation materials or flammable substances to avoid fire hazards;
5. If the glass is cracked, please replace it immediately;
6. Do not install the fixture on an unstable or weak skylight to prevent it from falling;
7. Keep the manual for future reference;
8. The light source within this fixture should be replaced by the manufacturer, its service agent, or a person with similar qualifications.

Wiring for fixture installation:

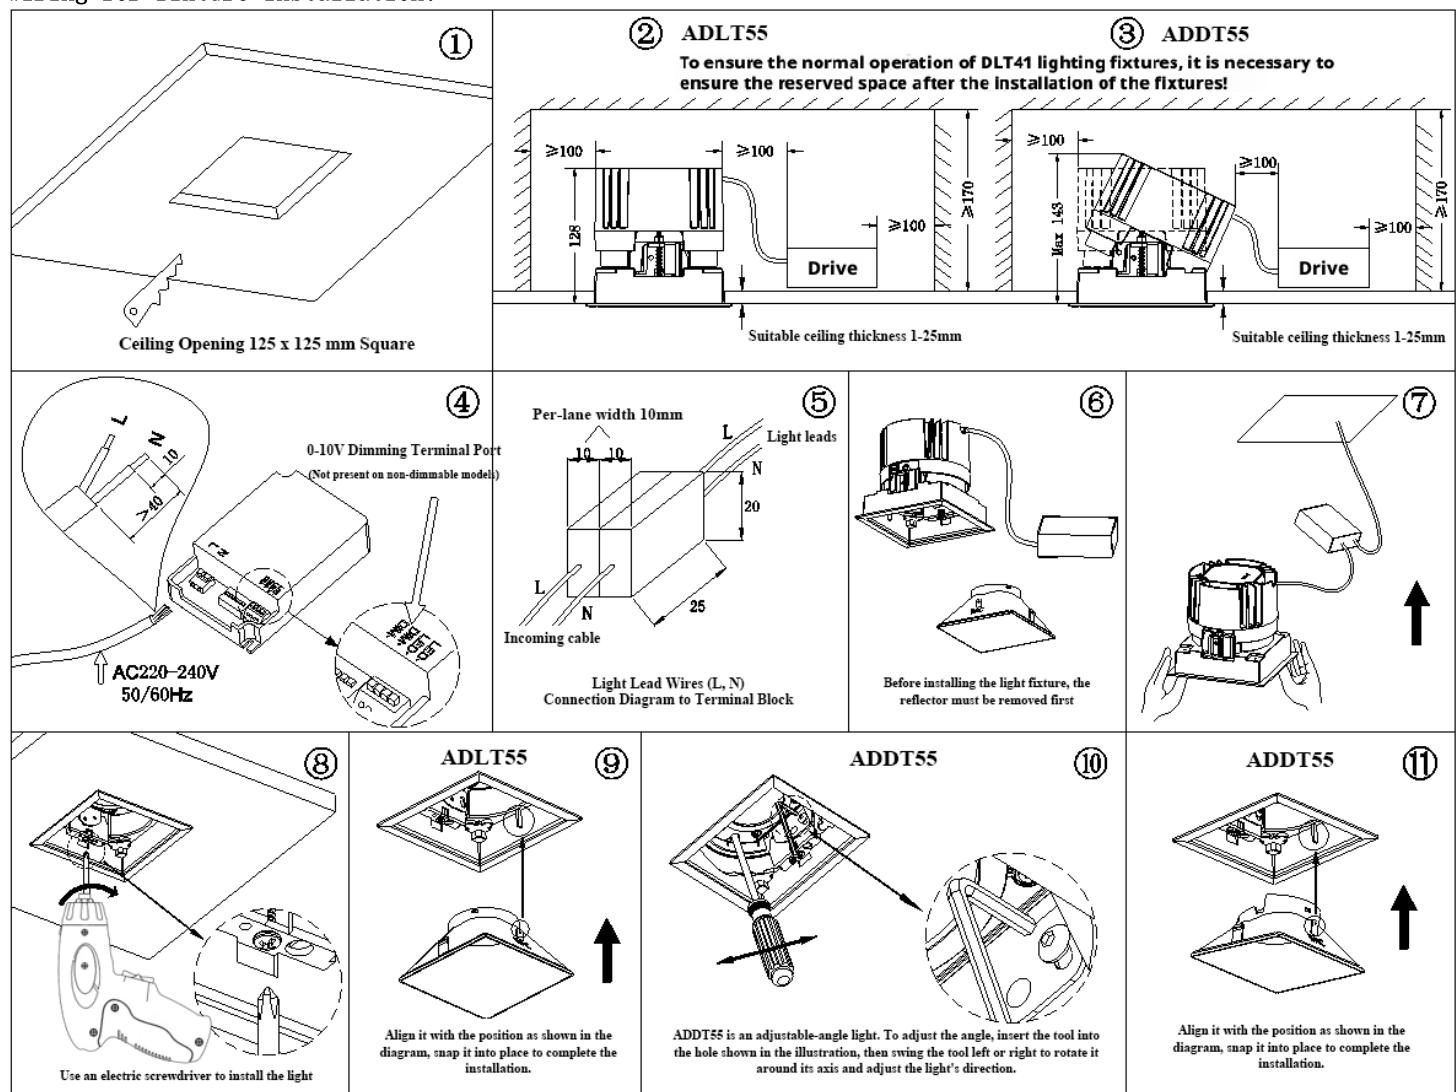

Authorized by the trademark holder "WAC," WAC Lighting Company, USA

China Marketing Headquarters: Hua Ge Lighting Technology (Shanghai) Co., Ltd.

Address: 14 Lane 299, Bisheng Road, China (Shanghai) Pilot Free Trade Zone (Postal Code: 201204)

China Factory : Produced by Dongguan Huaming Lighting Co., Ltd.

Address: 1 Qingfeng Road, Qingxi Town, Dongguan City, Guangdong Province, No. 390 (Postal Code: 523653)


Installation Instructions
Model: ADLT55/ADDT55 Series Downlight

- * If the light fixture has built-in leads, and these connection leads need to be connected to an independent terminal block (refer to Figure 5 for connection diagram), each terminal block size should not be less than 10x20x25mm.
- * For fixtures without electrical components, if the fixture has brown and blue leads, it cannot be directly connected to 220V AC power. The customer must provide the electrical components, which need to be compatible with the light source.

Installation Statement:

1. Please read the manual carefully before installation;
2. Please have a professional electrician perform the installation;
3. To avoid the risk of electric shock, please ensure the power is turned off before installation and maintenance;
4. The fixture can be recessed into the ceiling surface, and sufficient installation space must be reserved. Do not cover the fixture with insulation materials or flammable substances to avoid fire hazards;
5. If the glass is cracked, please replace it immediately;
6. Do not install the fixture on an unstable or weak skylight to prevent it from falling;
7. Keep the manual for future reference;
8. The light source within this fixture should be replaced by the manufacturer, its service agent, or a person with similar qualifications.

Wiring for fixture installation:

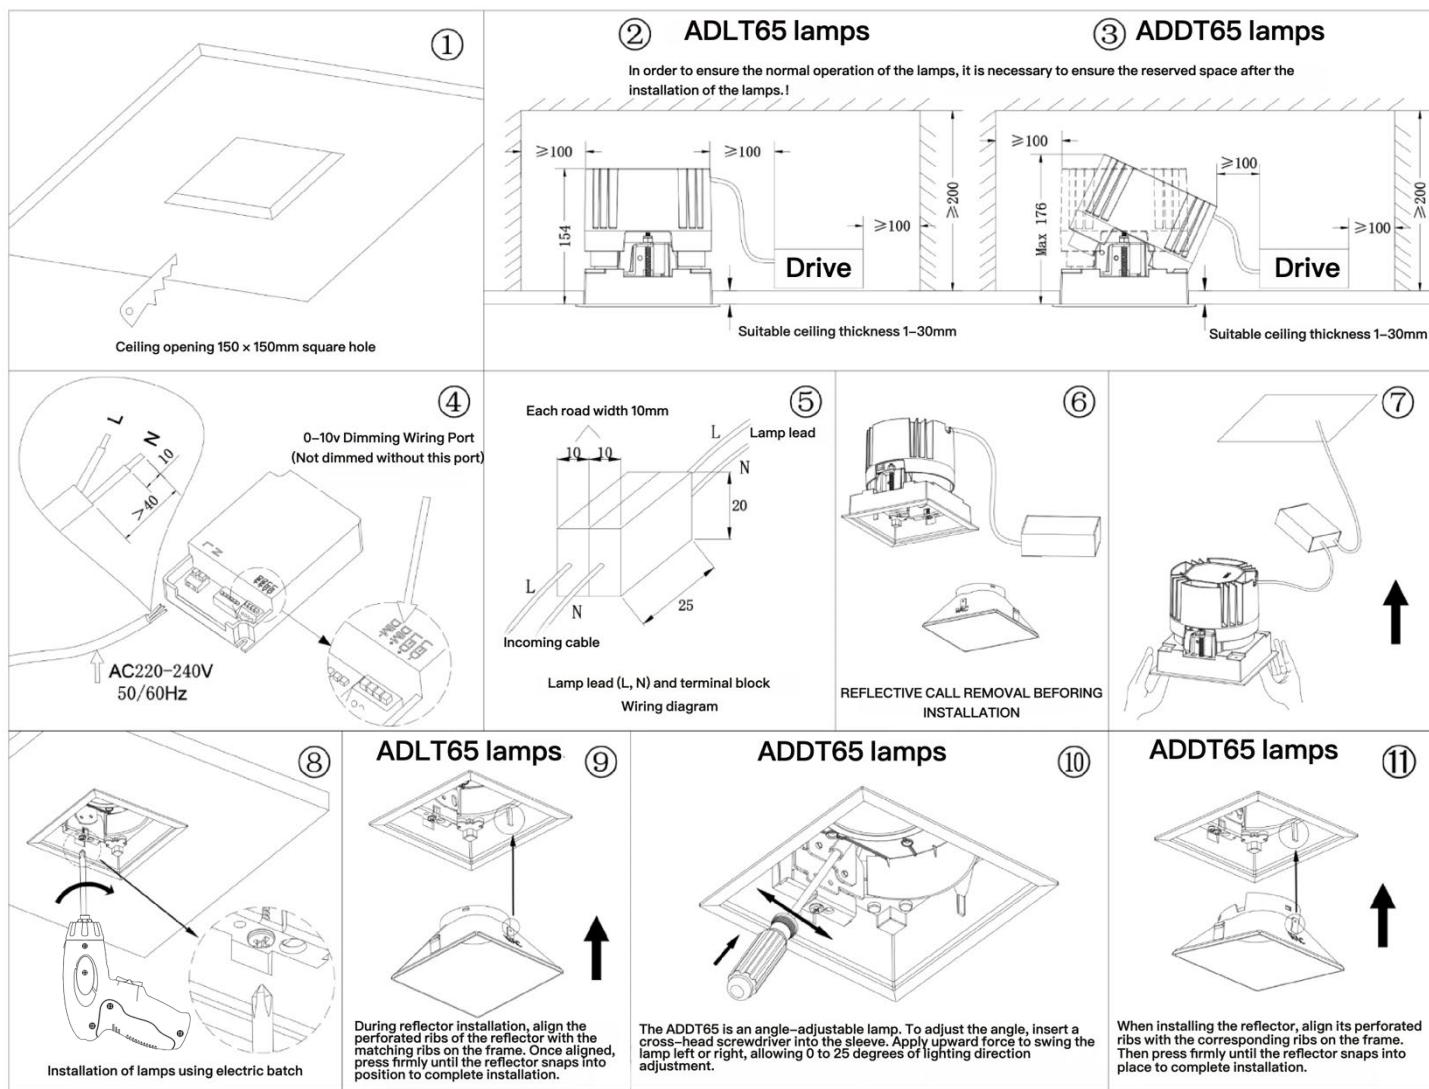

* If the lighting fixture has built-in leads, and these connection leads need to be connected to an independent terminal block (refer to Figure 5 for connection diagram), each terminal block size should not be less than 10x20x25mm.

* For fixtures without electrical components, if the fixture has brown and blue leads, it cannot be directly connected to 220V AC. The customer must provide the electrical components, which need to be compatible with the light source