




**Installation Precautions:**

1. Please read through the Instructions before installation;
2. The product should be installed by a professional electrician.
- Make sure the power supply is cut off before installation and maintenance;**
3. Suitable for indoor installation (not for use in wet environments);
4. It cannot be directly connected to the mains 220V, and the power supply of the lamp is 24VDC;
- (Note: The PWM dimming frequency of constant-voltage power supplies  $\geq 16$  KHz)**
5. Compatible with WAC ZIGGY Ultra-Narrow Track;
6. The light source is non-replaceable. When replacement is required (e.g., at the end of the light source's lifespan), the entire fixture must be replaced;
7. Please keep this Instruction properly for future reference.


**Light Installation:**

1. Before assembly, ensure that the locking knobs at both ends of the AD box are in the “” position.
2. Installation and removal of luminaires;

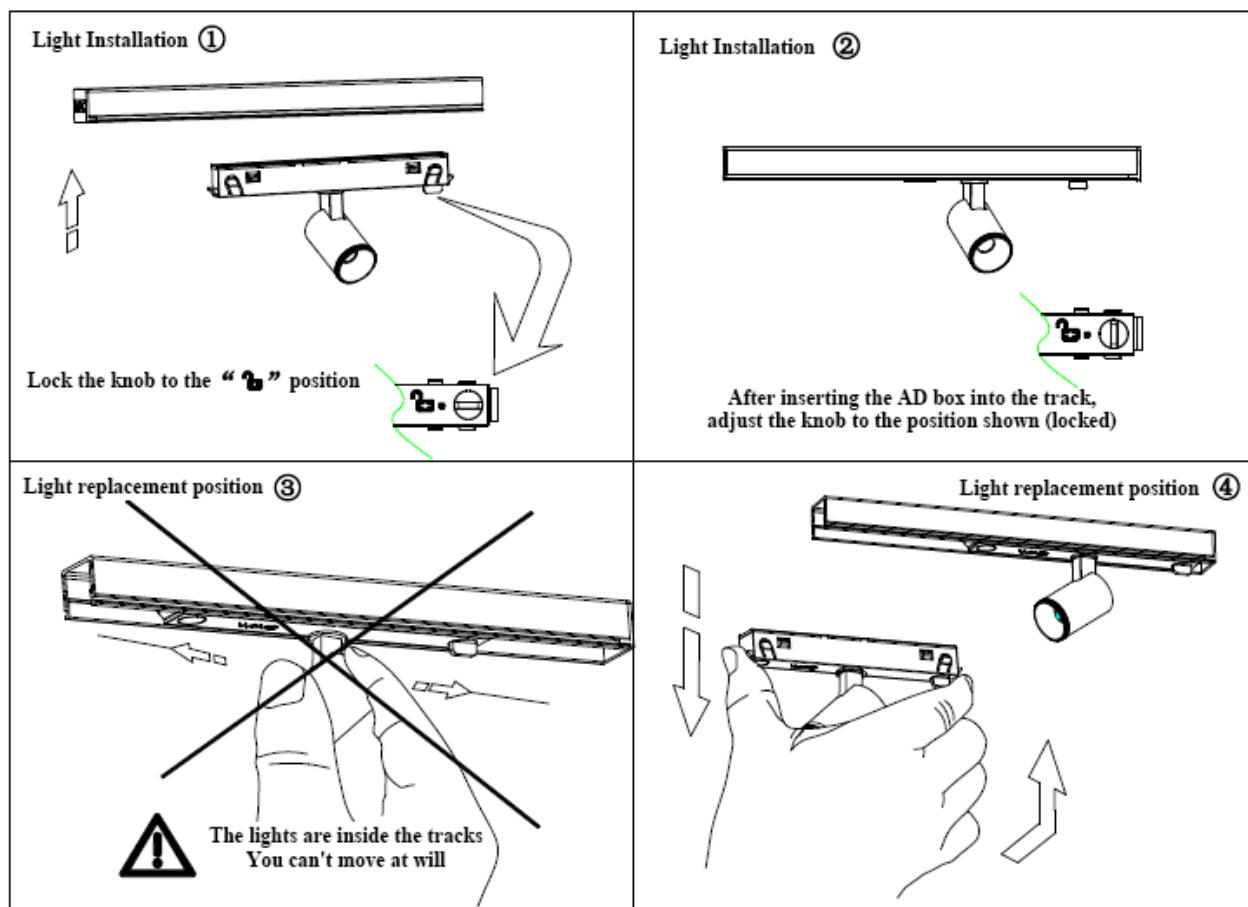


## Lighting Adjustment

## ① Light corner adjustment

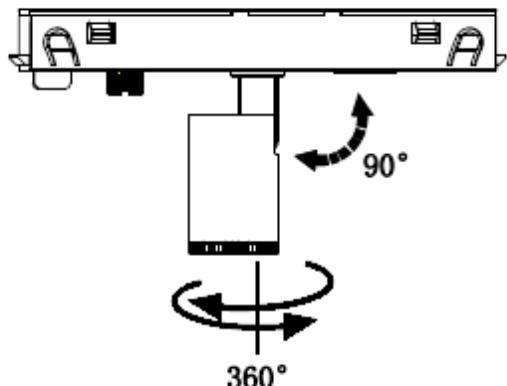

## ② Light dimming

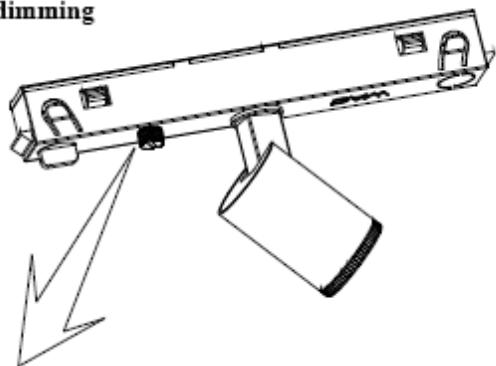


Dimming range:

10%–100%

Follow dimming version  
without knob

## ③ Beam angle adjustment (fixed-angle models do not have this feature)

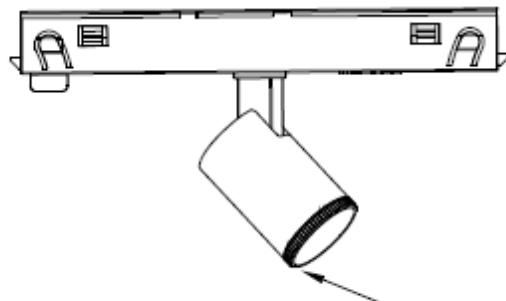

Rotate the front frame to adjust the spot size

## SMIE inlet termination wiring:

1. The internal drive of the lamp has been protected by the positive and negative electrodes against reverse circuit protection, and there is no need to distinguish the positive and negative poles when wiring the power incoming terminal.

