

LIGNE III- MODEL: AOP2S

Linear Luminaires


WAC LIGHTING

Responsible Lighting®


Project Name:

Type:

Product Image

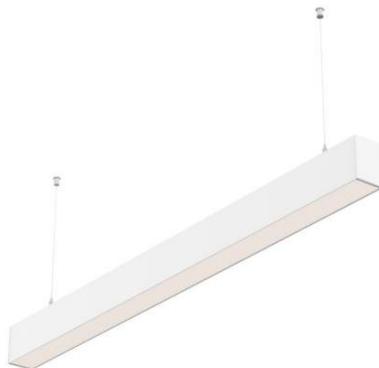

Line Drawing

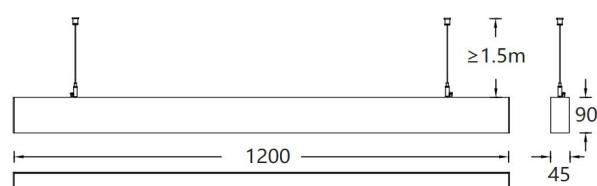

Product Description

The LIGNE III suspended linear luminaire features a sleek aluminum profile housing with a clean and modern appearance. Utilizing high-efficiency LED light sources, it offers excellent heat dissipation, energy-saving performance, and superior anti-glare control. The fixture supports end-to-end connection and customizable lengths, providing flexible design options for different lighting layouts. Ideal for commercial and office lighting applications, the LIGNE III delivers both functional illumination and refined aesthetics.

Product Features

• Body Materials:	Aluminum die-casting lamp body
• Optical System:	Anti-glare mask
• Finishes:	Electrostatic powder coating
• Objection Direction:	/
• Accessory/Bracket:	/
• Certification:	CCC
• IP Rating:	IP20
• Insulation Level:	Class I
• Operating Temperature:	-20°C—40°C

Product Specifications

• Shading Angle:	/
• LED Type:	SMD LED
• Source Lm:	1.2m:4000lm@3000K;1.2m:4500lm@4000K
• LED Lifetime:	> 50,000h-L70 /B10-Ta25°C(LM-80/TM-21)
• CCT/CRI:	3000K/3500K/4000K/5000K, Ra90
• SDCM:	3 SDCM
• Input:	220V-240V AC / 50Hz
• Dimming:	ON-OFF/0-10V/DALI(Matching tests must be done with the project site systems)
• Net Weight:	Approx. 2.37Kg, without packaging

Order Model

Model		Diameter (mm)	Power (W)	Driver	Beam Up	Beam Down	CCT	Finish
AOP2S	S Single Directional	12 1200	30 30W	E On-Off D 0-10V Dimming A DALI	/	P(Frosted cover) Y(Prismatic cover)	30 3000K 35 3500K 40 4000K 50 5000K	WT White BK Black
AOP2S	D Double Directional	12 1200	40 (down:30W, up:10W)	E On-Off D 0-10V Dimming A DALI	F Frosted	P(Frosted cover) Y(Prismatic cover)	30 3000K 35 3500K 40 4000K 50 5000K	WT White BK Black

Example: AOP2SS-1230EY40WT(Downlight)
AOP2SD-1240EFY40WT(Uplight+Downlight)

WAC Lighting

[www.waclighting.com \(US\)](http://www.waclighting.com (US))

[www.waclighting.com.cn \(China\)](http://www.waclighting.com.cn (China))

Headquarters

44 Harbor Park Drive • Port Washington, NY

Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting Technology (Shanghai) Co., Ltd

14, Lane 299, Bi Sheng Road, Shanghai 201204

Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

LIGNE III- MODEL: AOP2S

Linear Luminaires

WAC LIGHTING

Responsible Lighting®


Project Name:

Type:

Product Image



Line Drawing

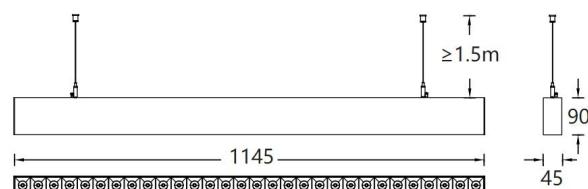

Product Description

The LIGNE III suspended linear luminaire features a sleek aluminum profile housing with a clean and modern appearance. Utilizing high-efficiency LED light sources, it offers excellent heat dissipation, energy-saving performance, and superior anti-glare control. The fixture supports end-to-end connection and customizable lengths, providing flexible design options for different lighting layouts. Ideal for commercial and office lighting applications, the LIGNE III delivers both functional illumination and refined aesthetics.

Product Features

• Body Materials:	Aluminum die-casting lamp body
• Optical System:	Lens+SUBROSA system
• Finishes:	Electrostatic powder coating
• Objection Direction:	/
• Accessory/Bracket:	/
• Certification:	CCC
• IP Rating:	IP20
• Insulation Level:	Class I
• Operating Temperature:	-20°C—40°C

Product Specifications

• Shading Angle:	58°
• LED Type:	High Power LED
• Source Lm:	1.2m:4000lm@3000K; 1.2m:4500lm@4000K
• LED Lifetime:	> 50,000h-L70 /B10-Ta25°C(LM-80/TM-21)
• CCT/CRI:	3000K/3500K/4000K/5000K, Ra90
• SDCM:	3 SDCM
• Input:	220V-240V AC / 50Hz
• Dimming:	ON-OFF/0-10V/DALI(Matching tests must be done with the project site systems)
• Net Weight:	Approx. 2.2Kg, without packaging

Order Model

Model		Diameter (mm)	Power (W)	Driver	Beam Up	Beam Down	CCT	Finish
AOP2S	S Single Directional	12 1145	30 30W	E On-Off D 0-10V Dimming A DALI	/	2 24° 3 36° 4 45°	30 3000K 35 3500K 40 4000K 50 5000K	WT White BK Black
AOP2S	D Double Directional	12 1145	40 (down:30W, up:10W)	E On-Off D 0-10V Dimming A DALI	F Frosted	2 24° 3 36° 4 45°	30 3000K 35 3500K 40 4000K 50 5000K	WT White BK Black

Example: AOP2SS-1230E340WT(Downlight)
AOP2SD-1240EF340WT(Uplight+Downlight)

WAC Lighting

[www.waclighting.com \(US\)](http://www.waclighting.com (US))

[www.waclighting.com.cn \(China\)](http://www.waclighting.com.cn (China))

Headquarters

44 Harbor Park Drive • Port Washington, NY

Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting Technology (Shanghai) Co., Ltd

14, Lane 299, Bi Sheng Road, Shanghai 201204

Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

LIGNE III- MODEL: AOP2S

Linear Luminaires

WAC LIGHTING

Responsible Lighting®


Project Name:

Type:

Product Image



Line Drawing

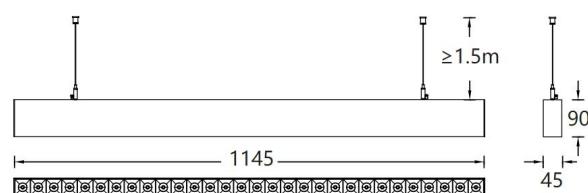

Product Description

The LIGNE III suspended linear luminaire features a sleek aluminum profile housing with a clean and modern appearance. Utilizing high-efficiency LED light sources, it offers excellent heat dissipation, energy-saving performance, and superior anti-glare control. The fixture supports end-to-end connection and customizable lengths, providing flexible design options for different lighting layouts. Ideal for commercial and office lighting applications, the LIGNE III delivers both functional illumination and refined aesthetics.

Product Features

• Body Materials:	Aluminum die-casting lamp body
• Optical System:	Lens+SUBROSA system
• Finishes:	Electrostatic powder coating
• Objection Direction:	/
• Accessory/Bracket:	/
• Certification:	CCC
• IP Rating:	IP20
• Insulation Level:	Class I
• Operating Temperature:	-20°C—40°C

Product Specifications

• Shading Angle:	58°
• LED Type:	High Power LED
• Source Lm:	1.2m:4000lm@3000K; 1.2m:4500lm@4000K
• LED Lifetime:	> 50,000h-L70 /B10-Ta25°C(LM-80/TM-21)
• CCT/CRI:	3000K/3500K/4000K/5000K, Ra90
• SDCM:	3 SDCM
• Input:	220V-240V AC / 50Hz
• Dimming:	ON-OFF/0-10V/DALI(Matching tests must be done with the project site systems)
• Net Weight:	Approx. 2.2Kg, without packaging

Order Model

Model		Diameter (mm)	Power (W)	Driver	Beam Up	Beam Down	CCT	Finish
AOP2S	S Single Directional	12 1145	30 30W	E On-Off D 0-10V Dimming A DALI	/	2 24° 3 36° 4 45°	30 3000K 35 3500K 40 4000K 50 5000K	WT White BK Black
AOP2S	D Double Directional	12 1145	40 (down:30W, up:10W)	E On-Off D 0-10V Dimming A DALI	F Frosted	2 24° 3 36° 4 45°	30 3000K 35 3500K 40 4000K 50 5000K	WT White BK Black

Example: AOP2SS-1230E340WT(Downlight)
AOP2SD-1240EF340WT(Uplight+Downlight)

WAC Lighting

[www.waclighting.com \(US\)](http://www.waclighting.com (US))

[www.waclighting.com.cn \(China\)](http://www.waclighting.com.cn (China))

Headquarters

44 Harbor Park Drive • Port Washington, NY

Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting Technology (Shanghai) Co., Ltd

14, Lane 299, Bi Sheng Road, Shanghai 201204

Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

LIGNE III- MODEL: AOP2S

Linear Luminaires


WAC LIGHTING

Responsible Lighting®


Project Name:

Type:

Product Image

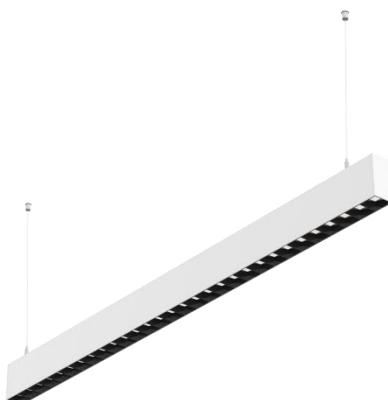

Line Drawing

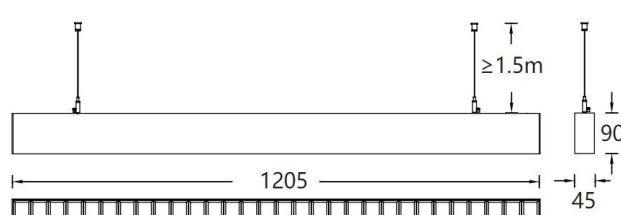

Product Description

The LIGNE III suspended linear luminaire features a sleek aluminum profile housing with a clean and modern appearance. Utilizing high-efficiency LED light sources, it offers excellent heat dissipation, energy-saving performance, and superior anti-glare control. The fixture supports end-to-end connection and customizable lengths, providing flexible design options for different lighting layouts. Ideal for commercial and office lighting applications, the LIGNE III delivers both functional illumination and refined aesthetics.

Product Features

• Body Materials:	Aluminum die-casting lamp body
• Optical System:	Lens+SUBROSA system
• Finishes:	Electrostatic powder coating
• Objection Direction:	/
• Accessory/Bracket:	/
• Certification:	CCC
• IP Rating:	IP20
• Insulation Level:	Class I
• Operating Temperature:	-20°C—40°C

Product Specifications

• Shading Angle:	26°
• LED Type:	High Power LED
• Source Lm:	1.2m:4000lm@3000K; 1.2m:4500lm@4000K
• LED Lifetime:	> 50,000h-L70 /B10-Ta25°C(LM-80/TM-21)
• CCT/CRI:	3000K/3500K/4000K/5000K, Ra90
• SDCM:	3 SDCM
• Input:	220V-240V AC / 50Hz
• Dimming:	ON-OFF/0-10V/DALI(Matching tests must be done with the project site systems)
• Net Weight:	Approx. 2.39Kg, without packaging

Order Model

Model		Diameter (mm)	Power (W)	Driver	Beam Up	Beam Down	CCT	Finish
AOP2S	S Single Directional	12 1205	30 30W	E On-Off D 0-10V Dimming A DALI	/	6 60° 8 80°	30 3000K 35 3500K 40 4000K 50 5000K	WT White BK Black
AOP2S	D Double Directional	12 1205	40 (down:30W, up:10W)	E On-Off D 0-10V Dimming A DALI	F Frosted	6 60° 8 80°	30 3000K 35 3500K 40 4000K 50 5000K	WT White BK Black

Example: AOP2SS-1230E840WT(Downlight)
AOP2SD-1240EF840WT (Uplight+Downlight)

WAC Lighting

[www.waclighting.com \(US\)](http://www.waclighting.com (US))

[www.waclighting.com.cn \(China\)](http://www.waclighting.com.cn (China))

Headquarters

44 Harbor Park Drive • Port Washington, NY

Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting Technology (Shanghai) Co., Ltd

14, Lane 299, Bi Sheng Road, Shanghai 201204

Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

LIGNE III- MODEL: AOP2S

Linear Luminaires


WAC LIGHTING

Responsible Lighting®


Project Name:

Type:

Product Image

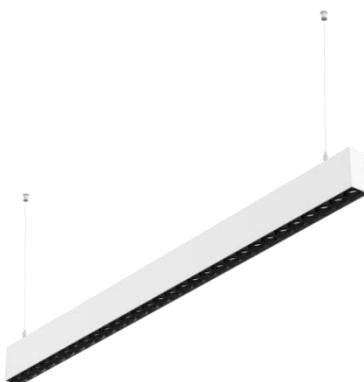

Line Drawing

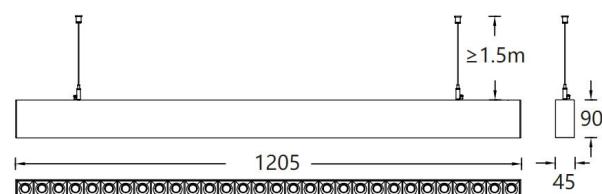

Product Description

The LIGNE III suspended linear luminaire features a sleek aluminum profile housing with a clean and modern appearance. Utilizing high-efficiency LED light sources, it offers excellent heat dissipation, energy-saving performance, and superior anti-glare control. The fixture supports end-to-end connection and customizable lengths, providing flexible design options for different lighting layouts. Ideal for commercial and office lighting applications, the LIGNE III delivers both functional illumination and refined aesthetics.

Product Features

• Body Materials:	Aluminum die-casting lamp body
• Optical System:	Lens+SUBROSA system
• Finishes:	Electrostatic powder coating
• Objection Direction:	/
• Accessory/Bracket:	/
• Certification:	CCC
• IP Rating:	IP20
• Insulation Level:	Class I
• Operating Temperature:	-20°C—40°C

Product Specifications

• Shading Angle:	18°
• LED Type:	High Power LED
• Source Lm:	1.2m:4000lm@3000K; 1.2m:4500lm@4000K
• LED Lifetime:	> 50,000h-L70 /B10-Ta25°C(LM-80/TM-21)
• CCT/CRI:	3000K/3500K/4000K/5000K, Ra90
• SDCM:	3 SDCM
• Input:	220V-240V AC / 50Hz
• Dimming:	ON-OFF/0-10V/DALI(Matching tests must be done with the project site systems)
• Net Weight:	Approx. 3.16Kg, without packaging

Order Model

Model	Comment	Length (mm)	Power (W)	Driver	Beam Up	Comment	Beam Down	CCT	Finish
AOP2S	S Single Directional	12 1205	30 30W	E On-Off D 0-10V Dimming A DALI	/	A Adjustable	1 15° 2 24° 3 36°	30 3000K 35 3500K 40 4000K 50 5000K	WT White BK Black
AOP2S	D Double Directional	12 1205	40 (下:30W, 上:10W)	E On-Off D 0-10V Dimming A DALI	F Frosted	A Adjustable	1 15° 2 24° 3 36°	30 3000K 35 3500K 40 4000K 50 5000K	WT White BK Black

Example: AOP2SS-1230EA240WT(Downlight)
AOP2SD-1240EFA240WT (Uplight+Downlight)

WAC Lighting

[www.waclighting.com \(US\)](http://www.waclighting.com (US))

[www.waclighting.com.cn \(China\)](http://www.waclighting.com.cn (China))

Headquarters

44 Harbor Park Drive • Port Washington, NY

Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting Technology (Shanghai) Co., Ltd

14, Lane 299, Bi Sheng Road, Shanghai 201204

Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598