

# LIGNE III- MODEL: AOR2S

## Linear Luminaires

WAC LIGHTING

Responsible Lighting®


Project Name:

Type:

### Product Image



### Line Drawing

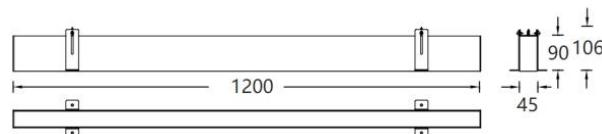

### Product Description

LIGNE III is a trimless recessed linear luminaire with an extruded aluminium housing and a clean, minimalist appearance. Equipped with an LED light source, it offers effective thermal management, high efficiency and energy savings, and excellent glare control. It supports end-to-end continuous runs and can be supplied in custom lengths. Suitable for commercial and office lighting applications.

### Product Features

• <b>Body Materials:</b>	Aluminum die-casting lamp bodyy
• <b>Optical System:</b>	Anti-glare mask
• <b>Finishes:</b>	Electrostatic powder coating
• <b>Objection Direction:</b>	/
• <b>Accessory/Bracket:</b>	/
• <b>Certification:</b>	CCC
• <b>IP Rating:</b>	IP20
• <b>Insulation Level:</b>	Class I
• <b>Operating Temperature:</b>	-20°C—40°C

### Product Specifications

• <b>Shading Angle:</b>	/
• <b>LED Type:</b>	SMD LED
• <b>Source Lm:</b>	1.2m:4000lm@3000K;1.2m:4500lm@4000K
• <b>LED Lifetime:</b>	> 50,000h-L70 /B10-Ta25°C(LM-80/TM-21)
• <b>CCT/CRI:</b>	3000K/3500K/4000K/5000K, Ra90
• <b>SDCM:</b>	3 SDCM
• <b>Input:</b>	220V-240V AC / 50Hz
• <b>Dimming:</b>	ON-OFF/0-10V/DALI(Matching tests must be done with the project site systems )
• <b>Net Weight:</b>	Approx. 2.34Kg, without packaging

### Order Model

Model	Length (mm)	Power (W)	Driver	Beam	CCT	Finish
AOR2S	12 1200	30 30W	E ON-OFF D 0-10V Dimming A DALI	P (Frosted cover) Y (Prismatic cover)	30 3000K 35 3500K 40 4000K 50 5000K	WT White BK Black

Example: AOR2S-1230EY40WT

# LIGNE III- MODEL: AOR2S

## Linear Luminaires

WAC LIGHTING

Responsible Lighting®


Project Name:

Type:

### Product Image



### Line Drawing

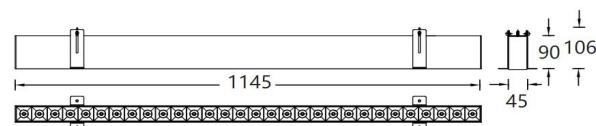

### Product Description

LIGNE III is a trimless recessed linear luminaire with an extruded aluminium housing and a clean, minimalist appearance. Equipped with an LED light source, it offers effective thermal management, high efficiency and energy savings, and excellent glare control. It supports end-to-end continuous runs and can be supplied in custom lengths. Suitable for commercial and office lighting applications.

### Product Features

• <b>Body Materials:</b>	Aluminum die-casting lamp body
• <b>Optical System:</b>	Lens+SUBROSA system
• <b>Finishes:</b>	Electrostatic powder coating
• <b>Objection Direction:</b>	/
• <b>Accessory/Bracket:</b>	/
• <b>Certification:</b>	CCC
• <b>IP Rating:</b>	IP20
• <b>Insulation Level:</b>	Class I
• <b>Operating Temperature:</b>	-20°C—50°C

### Product Specifications

• <b>Shading Angle:</b>	58°
• <b>LED Type:</b>	High Power LED
• <b>Source Lm:</b>	1.2m:4000lm@3000K; 1.2m:4500lm@4000K
• <b>LED Lifetime:</b>	> 50,000h-L70 /B10-Ta25°C(LM-80/TM-21)
• <b>CCT/CRI:</b>	3000K/3500K/4000K/5000K, Ra90
• <b>SDCM:</b>	3 SDCM
• <b>Input:</b>	220V-240V AC / 50Hz
• <b>Dimming:</b>	ON-OFF/0-10V/DALI(Matching tests must be done with the project site systems )
• <b>Net Weight:</b>	Approx. 2.23Kg, without packaging

### Order Model

Model	Length (mm)	Power (W)	Driver	Beam	CCT	Finish
AOC2S	12 1145	30 30W	E ON-OFF D 0-10V Dimming A DALI	2 24° 3 36° 4 45°	30 3000K 35 3500K 40 4000K 50 5000K	WT White BK Black

Example: AOR2S-1230E340WT

# LIGNE III- MODEL: AOR2S

## Linear Luminaires


WAC LIGHTING

Responsible Lighting®


Project Name:

Type:

### Product Image

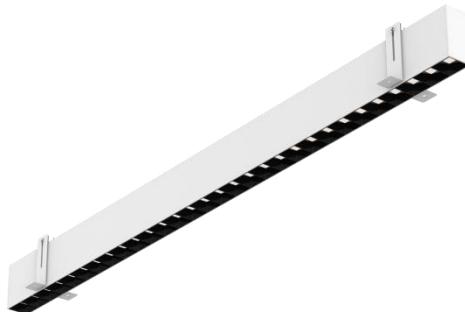

### Line Drawing

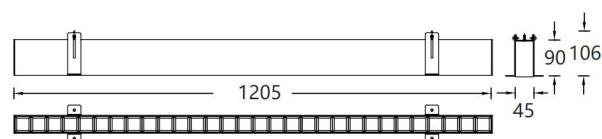

### Product Description

LIGNE III is a trimless recessed linear luminaire with an extruded aluminium housing and a clean, minimalist appearance. Equipped with an LED light source, it offers effective thermal management, high efficiency and energy savings, and excellent glare control. It supports end-to-end continuous runs and can be supplied in custom lengths. Suitable for commercial and office lighting applications.

### Product Features

• <b>Body Materials:</b>	Aluminum die-casting lamp body
• <b>Optical System:</b>	Lens+SUBROSA system
• <b>Finishes:</b>	Electrostatic powder coating
• <b>Objection Direction:</b>	/
• <b>Accessory/Bracket:</b>	/
• <b>Certification:</b>	CCC
• <b>IP Rating:</b>	IP20
• <b>Insulation Level:</b>	Class I
• <b>Operating Temperature:</b>	-20°C—40°C

### Product Specifications

• <b>Shading Angle:</b>	26°
• <b>LED Type:</b>	High Power LED
• <b>Source Lm:</b>	1.2m:4000lm@3000K; 1.2m:4500lm@4000K
• <b>LED Lifetime:</b>	> 50,000h-L70 /B10-Ta25°C(LM-80/TM-21)
• <b>CCT/CRI:</b>	3000K/3500K/4000K/5000K, Ra90
• <b>SDCM:</b>	3 SDCM
• <b>Input:</b>	220V-240V AC / 50Hz
• <b>Dimming:</b>	ON-OFF/0-10V/DALI(Matching tests must be done with the project site systems )
• <b>Net Weight:</b>	Approx. 2.37Kg, without packaging

### Order Model

Model	Length (mm)	Power (W)	Driver	Beam	CCT	Finish
AOC2S	12 1205	30 30W	<b>E</b> ON-OFF <b>D</b> 0-10V Dimming <b>A</b> DALI	<b>6</b> 60° <b>8</b> 80°	<b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K <b>50</b> 5000K	<b>WT</b> White <b>BK</b> Black

Example: AOR2S-1230E840WT

# LIGNE III- MODEL: AOR2S

## Linear Luminaires

**WAC LIGHTING**

Responsible Lighting®


Project Name:

Type:

### Product Image



### Line Drawing

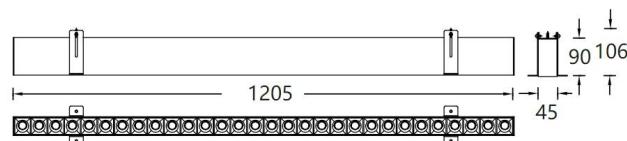

### Product Description

LIGNE III is a trimless recessed linear luminaire with an extruded aluminium housing and a clean, minimalist appearance. Equipped with an LED light source, it offers effective thermal management, high efficiency and energy savings, and excellent glare control. It supports end-to-end continuous runs and can be supplied in custom lengths. Suitable for commercial and office lighting applications.

### Product Features

• <b>Body Materials:</b>	Aluminum die-casting lamp body
• <b>Optical System:</b>	Lens+SUBROSA system
• <b>Finishes:</b>	Electrostatic powder coating
• <b>Objection Direction:</b>	/
• <b>Accessory/Bracket:</b>	/
• <b>Certification:</b>	CCC
• <b>IP Rating:</b>	IP20
• <b>Insulation Level:</b>	Class I
• <b>Operating Temperature:</b>	-20°C—50°C

### Product Specifications

• <b>Shading Angle:</b>	18°
• <b>LED Type:</b>	High Power LED
• <b>Source Lm:</b>	1.2m:4000lm@3000K; 1.2m:4500lm@4000K
• <b>LED Lifetime:</b>	> 50,000h-L70 /B10-Ta25°C(LM-80/TM-21)
• <b>CCT/CRI:</b>	3000K/3500K/4000K/5000K, Ra90
• <b>SDCM:</b>	3 SDCM
• <b>Input:</b>	220V-240V AC / 50Hz
• <b>Dimming:</b>	ON-OFF/0-10V/DALI(Matching tests must be done with the project site systems )
• <b>Net Weight:</b>	Approx. 3.05Kg, without packaging

### Order Model

Model	Length (mm)	Power (W)	Driver	Comment	Beam	CCT	Finish
AOC2S	12 1205	30 30W	<b>E</b> ON-OFF <b>D</b> 0-10V Dimming <b>A</b> DALI	<b>A</b> Adjustable	<b>1</b> 15° <b>2</b> 24° <b>3</b> 36°	<b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K <b>50</b> 5000K	<b>WT</b> White <b>BK</b> Black

Example: AOR2S-1230EA240WT