


ELANA PRO - MODEL: AMTH35
3"Infinity Recessed Combination Luminaire




PROJECT:

TYPE:

Product Image

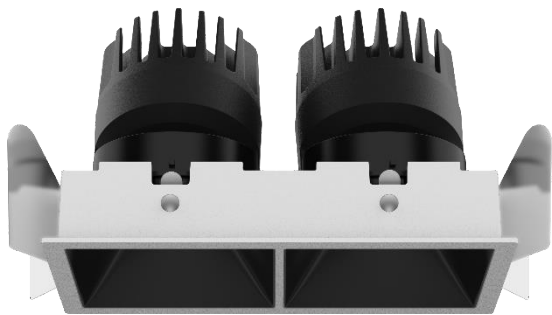

Line Drawing

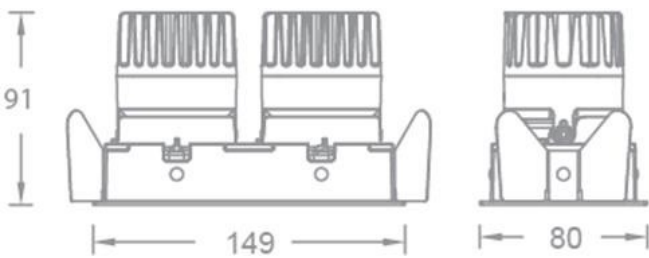

Product Description

ELANA Pro square edge built-in combination lamps, perfect integration of downlighting and Angle adjustment functions. Precise light distribution through the lens, coupled with high-quality reflectors, provides a comfortable visual experience and ensures the integrity of the light spot. Especially suitable for high-end hotels, commercial and office public space.

Product Features

- Body Material: Aluminum die cast face frame and lamp body
- Optical System: Lens+ reflector optical system
- Finish: Static electricity powder coating
- Adjustable Angle: Vertical 0~25°, Horizontal 0~355°
- Accessories: 15° comes with honeycomb
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class II
- Operating Temperature: -20°C~40°C

Product Specifications

- Cut-out: ☐ 146*72 mm
- Ceiling Thicknes 6mm~25mm
- Shielding Angle: 40°
- LED Type: COB LED
- Source Lm: The single lamp parameters are as follows, and the total luminous flux of the dual lamp combination is twice that
2700K 7W 758lm; 10W 1080lm; 13W 1404lm
3000K 7W 800lm; 10W 1150lm; 13W 1495lm
4000K 7W 850lm; 10W 1210lm; 13W 1573lm
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K/ 3000K/4000K, Ra90
- SDCM: 3 SDCM
- Input: 220V AC / 50Hz
- Dimming: ON-OFF/ 0-10V /DALI(Must be done in advance with the project site system Match test)
- Net Weight: 0.7Kg without packing

ELANA PRO - MODEL: AMTH35

3"Infinity Recessed Combination Luminaire



PROJECT:

TYPE:

Order Model

Model	Size	Trim	LED	Driver	Beam	CCT	Reflector	Finish
AMTH Multiple Downlight H series	3 3"	6 Rectangular Trimless	207 COB 2*7W	E ON-OFF D 0-10V Dimming	1 15°	27 2700K	S Specular	WT White
			210 COB 2*10W		2 24°	30 3000K	B Black	
			213 COB 2*13W	N No Driver A DALI	3 36°	40 4000K		
			213 COB 2*13W		4 45°			

Example: AMTH35-210E230SWT

Note: 15° factory comes with honeycomb, other angles do not bring

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

	MODEL: AMTH35-207E130SWT		MODEL: AMTH35-210E130SWT
BEAM ANGLE: 15°	BEAM ANGLE: 15°	BEAM ANGLE: 15°	BEAM ANGLE: 15°
POWER: 2*9W	POWER: 2*11W	POWER: 2*9W	POWER: 2*11W
LUMENS: 2*351lm	LUMENS: 2*446lm	LUMENS: 2*562lm	LUMENS: 2*662lm
CBCP: 2*3436cd	CBCP: 2*4366cd	CBCP: 2*5501cd	CBCP: 2*2893cd
EFFICACY: 39lm/W	EFFICACY: 41lm/W	EFFICACY: 37lm/W	EFFICACY: 74lm/W
	MODEL: AMTH35-213E130SWT		MODEL: AMTH35-207E230SWT
BEAM ANGLE: 15°	BEAM ANGLE: 15°	BEAM ANGLE: 24°	BEAM ANGLE: 24°
POWER: 2*15W	POWER: 2*11W	POWER: 2*15W	POWER: 2*15W
LUMENS: 2*562lm	LUMENS: 2*841lm	LUMENS: 2*1059lm	LUMENS: 2*1059lm
CBCP: 2*5501cd	CBCP: 2*3675cd	CBCP: 2*4631cd	CBCP: 2*4631cd
EFFICACY: 37lm/W	EFFICACY: 76lm/W	EFFICACY: 71lm/W	EFFICACY: 71lm/W
	MODEL: AMTH35-210E230SWT		MODEL: AMTH35-213E230SWT
BEAM ANGLE: 24°	BEAM ANGLE: 24°	BEAM ANGLE: 24°	BEAM ANGLE: 24°
POWER: 2*11W	POWER: 2*11W	POWER: 2*15W	POWER: 2*15W
LUMENS: 2*841lm	LUMENS: 2*841lm	LUMENS: 2*1059lm	LUMENS: 2*1059lm
CBCP: 2*3675cd	CBCP: 2*3675cd	CBCP: 2*4631cd	CBCP: 2*4631cd
EFFICACY: 76lm/W	EFFICACY: 76lm/W	EFFICACY: 71lm/W	EFFICACY: 71lm/W

ELANA PRO - MODEL: AMTH35
3"Infinity Recessed Combination Luminaire



PROJECT:

TYPE:

	MODEL:AMTH35-207E330SWT BEAM ANGLE:36° POWER:2*9W LUMENS:2*564lm CBCP:2*1567cd EFFICACY:81lm/W		MODEL:AMTH35-210E330SWT BEAM ANGLE:36° POWER:2*11W LUMENS:2*716lm CBCP:2*1991cd EFFICACY:65lm/W
	MODEL:AMTH35-213E330SWT BEAM ANGLE:36° POWER:2*15W LUMENS:2*902lm CBCP:2*2508cd EFFICACY:60lm/W		MODEL:AMTH35-207E430SWT BEAM ANGLE:45° POWER:2*9W LUMENS:2*497lm CBCP:2*886cd EFFICACY:55lm/W
	MODEL:AMTH35-210E430SWT BEAM ANGLE:45° POWER:2*11W LUMENS:2*632lm CBCP:2*1126cd EFFICACY:57lm/W		MODEL:AMTH35-213E430SWT BEAM ANGLE:45° POWER:2*15W LUMENS:2*796lm CBCP:2*1419cd EFFICACY:53lm/W