


### Installation Precautions:

1. Please read through the Instructions before installation.
2. The product should be installed by a professional electrician.
3. Make sure the power supply is cut off before installation and maintenance, to avoid the risk of electric shock.
4. Before installing the lamp, please make sure that the installation surface is firm and reliable to avoid the lamp from loosening and falling off;
5. Please keep this Instruction properly for future reference.

### Lighting installation:

1. Install a plastic anchor on the ceiling, and reserve or process a wire hole (the plastic anchor is in the parts package), as shown in Figure 1.
2. Take out the lamp from the packaging box, remove the circular back cover plate of the lamp, fix the circular back cover plate on the ceiling with self-tapping screws, and pay attention to the need to wear the power cord through the outlet hole of the circular back cover plate when fixing, as shown in Figure 2 and 3.

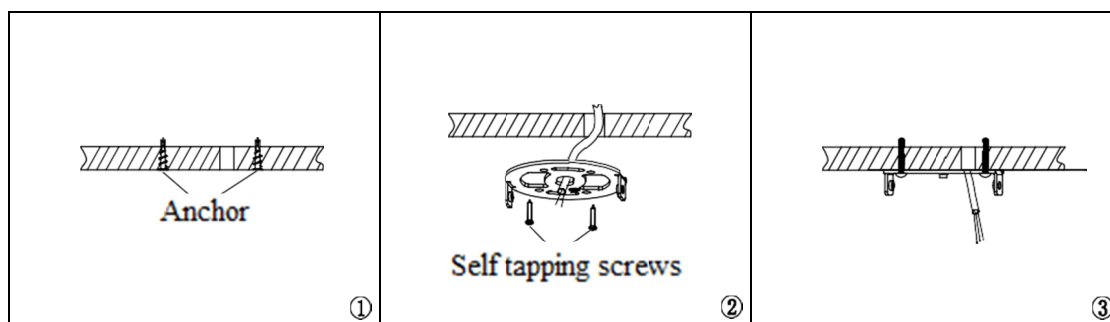

3. Connect the mains power input line and the lamp power line together using the waterproof junction box shown in the diagram (the waterproof junction box shown in the diagram is not included), as shown in Figure 4.

Attention: The yellow green wire is the ground wire ( $\oplus$ ), the live wire is marked with "L", the zero wire is marked with "N", the positive pole of the dimming light is marked with "+", and the negative pole of the dimming light is marked with "-".

4. Installation of lamps: Align the lamps with the circular rear cover plate, lift the lamps up to the highest position, align the screw holes on the top of the lamps with the screw holes on the circular rear cover plate, and screw in the screws, as shown in Figure 5.
5. After fixing the screws, rotate the middle lamp body. The lamp can rotate horizontally by 0-355 ° and vertically by -25 ° to 25 °, as shown in Figure 6.

