

LEDME - MODEL: SLP

Showcase Luminaires

WAC LIGHTING

Responsible Lighting®


Project:

Type:

Product Image



Line drawing

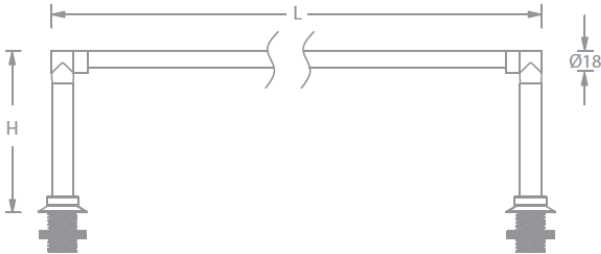

Product Description

LEDme Showcase series LED desk cabinet light, compact design, made of stretched aluminum lamp body, provides a variety of length size options, and can adjust the height of the lamp size and irradiation direction according to the size of the desk cabinet, more importantly, can support the field freehand splicing, with high flexibility. Built-in LED light module, external constant current or constant voltage drive, and support a variety of dimming methods. Widely used in museum display cases and art gallery display cases and other places.

Product Features

- **Body Material:** Aluminum Body
- **Optical System:** Lens+ SUBOROSA optical system
- **Finish:** Black
- **Adjustable Angle:** 0~60° Rotation
- **Accessories:** /
- **Certification:** CQC
- **IP Rating:** IP20
- **Insulation Level:** Class III
- **Operating temperture:** -20°C~40°C

Product Specifications

- **Led Type:** SMD
- **Source power:** 10W/m or 20W/m
- **Source Lm:** 3000K: 800lm (10W/m) / 1480lm (20W/m)
4000K: 880lm (10W/m) / 1630lm (20W/m)
- **Led Lifetime:** >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 3000K / 4000K , Ra90 or Ra97(>Ra95)
- **SDCM:** 3 SDCM
- **Input:** 24VDC Driver not included
- **Dimming:** Depends on the external driver and needs to be ordered separately
- **Optional length L:** For details, see the appendix; Opening size: Ø25, the center distance between the two holes is L minus 20mm
- **Height of the vertical pole H:** 50 to 320mm, can be suspended at any position
- **Net Weight:** 0.65Kg (1m Fixture) without driver and packing

Order Model

Model	LED	Length (L)	Drive	Beam	CRI	CCT	Finish
SLP1	10 10W/m 20 20W/m	20 2.029m	E Constant Current T Constant Voltage	W Wash	9 90 A 97	30 3000K 40 4000K	BK Black
Universal luminaire		16 1.621m					
SLP2		14 1.417m					
Connected luminaire		10 1.007m					
		05 0.497m					
SLP1	10	05	T	W	9	30	BK

Example: SLP1-1005T-W930BK

Remarks:Customer can ordered the special length. Please contact with WAC

LEDME - MODEL: SLP
Showcase Luminaires


WAC LIGHTING
Responsible Lighting®

Project:



Type:

Fixture connect pictures

Firstly,we split the SLP1 into two parts,then connect with SLP2.For examples,DC24V is input :

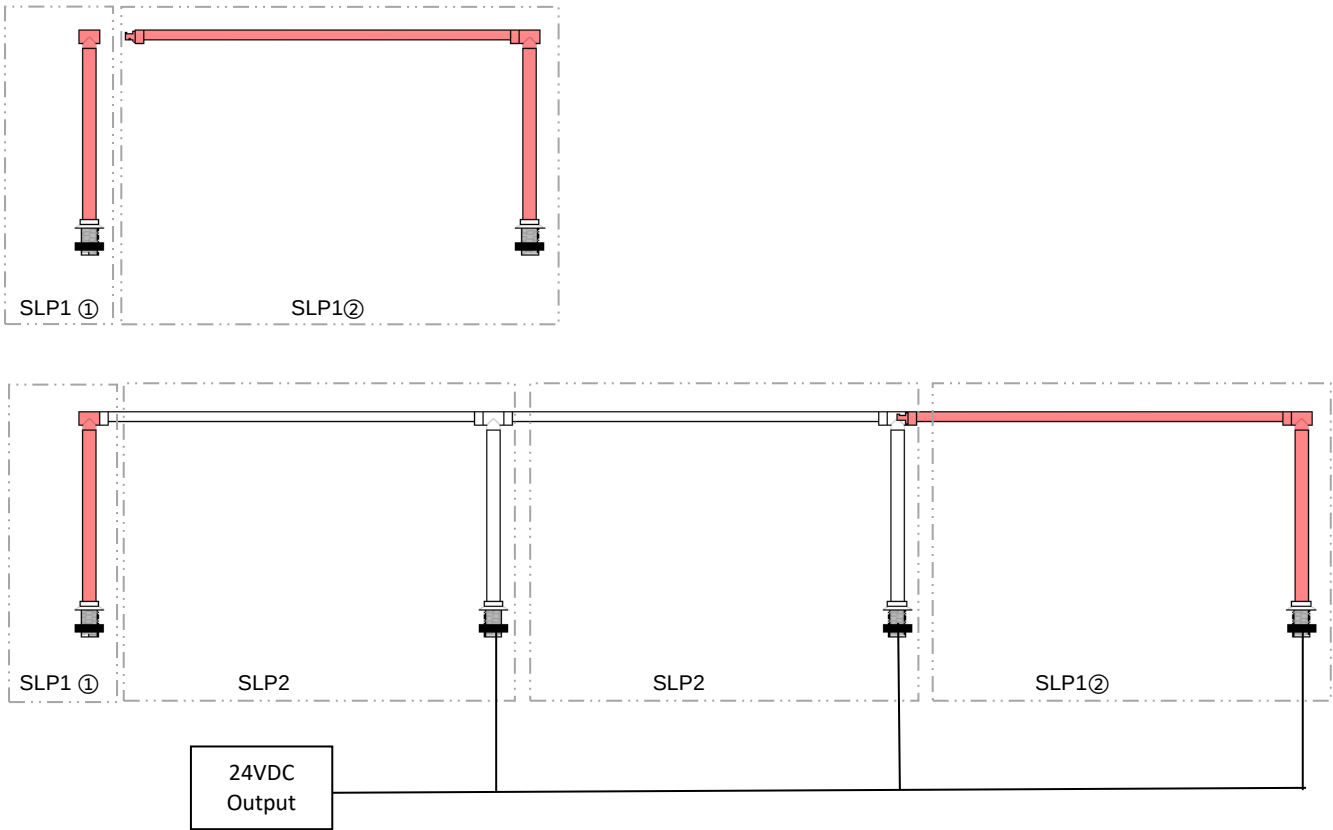

Installing pictures

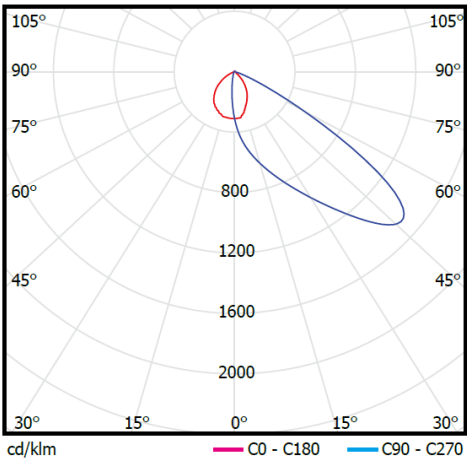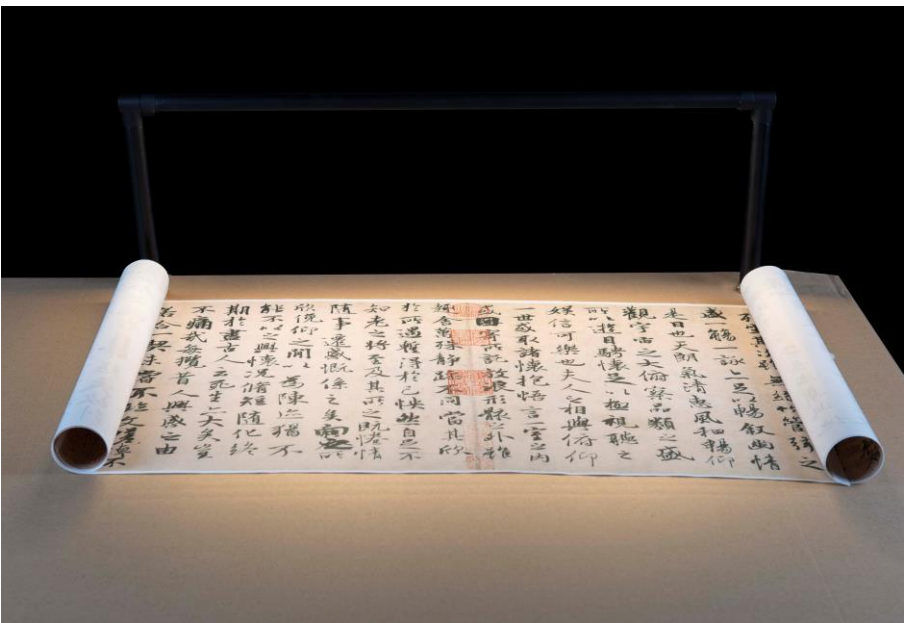

LEDME - MODEL: SLP

Showcase Luminaires

WAC LIGHTING

Responsible Lighting®

Project:

Type:

Length

Model	Description(m)	Length , mm	center-to-center spacing L - (29±1)
SLP1-2022T-W930BK	2.2	2233	2204
SLP1-2020T-W930BK	2.1	2029	2000
SLP1-2019T-W930BK	1.9	1927	1898
SLP1-2018T-W930BK	1.8	1825	1796
SLP1-2017T-W930BK	1.7	1723	1694
SLP1-2016T-W930BK	1.6	1621	1592
SLP1-2015T-W930BK	1.5	1519	1490
SLP1-2014T-W930BK	1.4	1417	1388
SLP1-2013T-W930BK	1.3	1313	1284
SLP1-2012T-W930BK	1.2	1211	1182
SLP1-2011T-W930BK	1.1	1109	1080
SLP1-2010T-W930BK	1.0	1007	978
SLP1-2009T-W930BK	0.9	905	876
SLP1-2008T-W930BK	0.8	803	774
SLP1-2007T-W930BK	0.7	701	672
SLP1-2006T-W930BK	0.6	599	570
SLP1-2005T-W930BK	0.5	497	468