

FUEGO COMPACT - MODEL: AEIR7S

In-ground Luminaires

WAC


PROJECT:

TYPE:

Product Image



Line Drawing

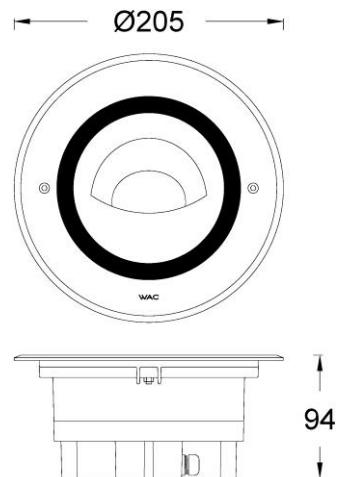

Product Description

The FUEGO Compact face frame is made of high-quality 316 stainless steel, with the lamp body made of aluminum die-casting and high-temperature powder spraying, suitable for outdoor environments. It has an IP67 protection level and an IK08 impact resistance level, and can withstand pressure of 2000kg. Patent wall washing system with a distance to height ratio of 1:1:3. Cooperate with the design of the embedded cylinder to facilitate customer installation and maintenance. Applied to residential areas, squares, parks, shopping centers, sculpture decoration lighting, etc.

Product Features

- Body Material: Aluminum alloy die-casting + Stainless steel frame
- Optical System: Litebrush[®] Light waterfall wall washing system
- Finish: Static electricity powder coating
- Adjustable Angle: /
- Accessories: /
- Certification: CCC
- IP Rating: IP67,IK08
- Insulation Level: Class I
- Operating Temperature: -20°C~50°C

Product Specifications

- LED Type : COB
- LED Power: 18W Max
- Source Lm: 3000K 2070lm
- LED Lifetime: >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K, 3000K ,4000K, Ra90
- SDCM: 3 SDCM
- Input: 220V AC/50Hz
- Dimming: ON-OFF
- Net Weight: 2.1Kg without packing

Order Model

Model	Comment	Power (W)	LEDs (quantity)	Max Lumens (lm)	Control Systems	Beam	CCT	Finish
AEIR7S	F Frame	18 18(Max)	COB	920	EL ON-OFF 220V AC Power Supply	W WALL WASHER	27 2700K 30 3000K 40 4000K	SS Stainless Steel

Example: AEIR7SF-18ELW27SS

WAC Lighting

www.waclighting.com (US)

www.waclighting.com.cn (China)

Headquarters

44 Harbor Park Drive • Port Washington, NY

Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)

14,Lane 299, Bi Sheng Road, Shanghai 201204,China

Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

FUEGO COMPACT - MODEL: AEIR7S

In-ground Luminaires

WAC

PROJECT:

TYPE:

Accessory

Item	Description	Pic	Description Dimensions
AEIR5SF-RC001	Recessed Casing		<p>Ø183</p>  <p>106</p>

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

MODEL:	AEIR7SF-18ELW30SS
BEAM ANGLE:	WALL WASHER
POWER:	20.4 W
LUMENS:	920 LM
CBCP:	/
EFFICACY:	45.1 LM /W

