


**Installation Precautions:**


1. Please read the instruction manual carefully and follow the instructions before installation;
2. The lighting fixtures should be installed on the ceiling surface. Do not cover insulation and combustibles around the lighting fixtures and bulbs to avoid causing a fire;
3. The product is installed by a professional electrician;
4. To avoid the risk of electric shock, please confirm to turn off the power before installation and maintenance;
5. Suitable for indoor installation and use (not suitable for humid environments);
6. Do not install the lighting fixtures on unstable and unstable skylights to prevent them from falling;
7. Keep this manual properly for future use.

**Light Installation and Wiring:**

1. Confirm that the ceiling is sturdy enough to support the weight of the lighting fixtures;
2. Take out the accessory package from the product, as shown in the accessory package in the right figure;

<h2>Accessory kit</h2>	
<p>A</p>  <p>Large plastic geckos, quantity: 2PCS</p>	<p>B</p>  <p>Small plastic geckos, quantity: 2PCS</p>
<p>C</p>  <p>Fixed screws, quantity: 2PCS</p>	<p>D</p>  <p>Wiring cap with 0-10V dimming function: 5PCS, other functions: 3PCS</p>

3. As shown in the figure below, wire and install the ceiling panel according to the requirements shown in the diagram.

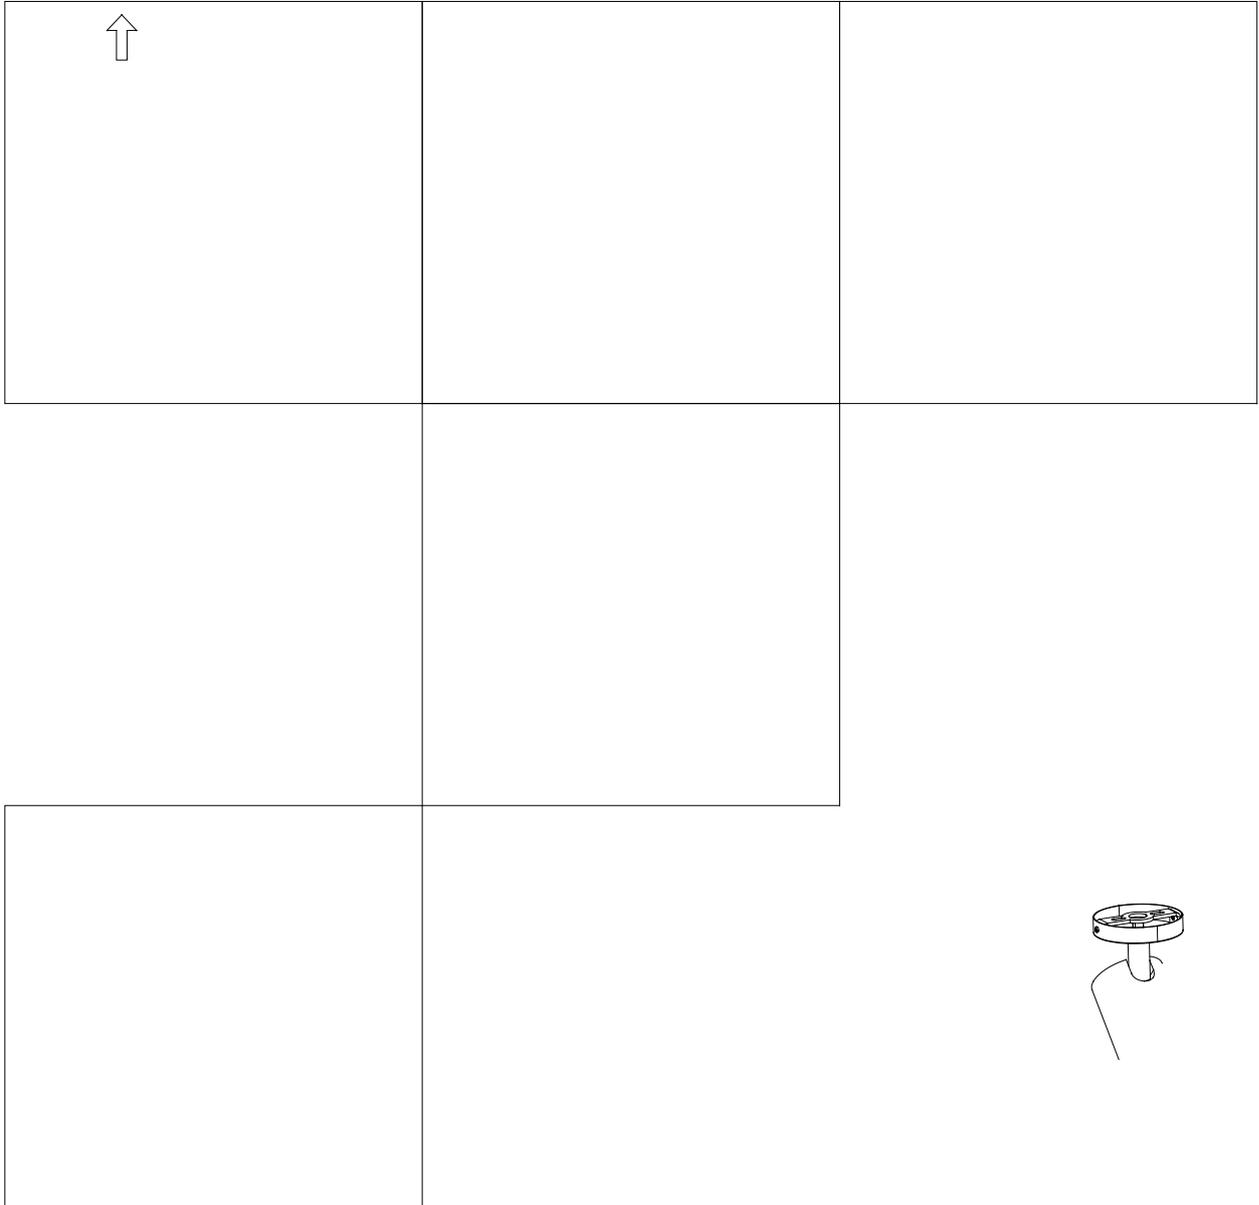


## Lamp adjustment:


1. The lamp can rotate horizontally by 355 degrees and vertically by 90 degrees to adjust positioning. The specific instructions are shown in the following figure;
2. Lamp with knob dimming function: Rotate the rear cover dimming knob to adjust the brightness of the lamp, with a dimming range of 10% -100%;
3. Lamp with DALI/0-10V dimming function, without dimming knob, with purple gray dimming light inside the ceiling panel;

## Installation of attachments (purchased separately):


1. Rotate the front cover clockwise until it stops rotating, then remove it from the lamp by hand.
2. After replacing the glass or other accessories, align the opening on the side of the front cover with the protrusion on the lamp body and install it. Tighten the front cover counterclockwise to complete the installation of the accessories.

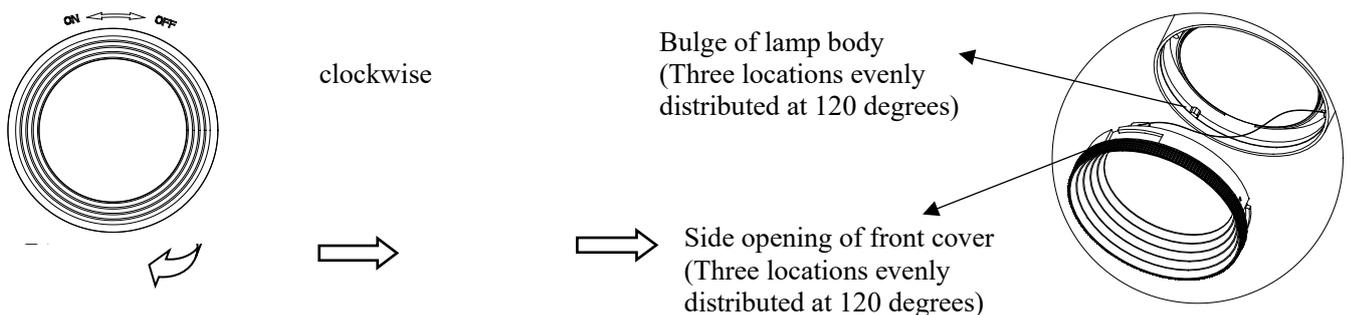

1. For glass accessories, please refer to the specifications and replace with new glass instructions:

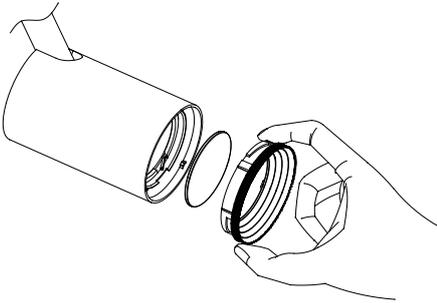


As shown in the above figure, rotate the front cover clockwise by hand until it stops rotating. Then, remove the front cover from the lamp by hand and remove the glass accessories to install the new glass into the lamp.

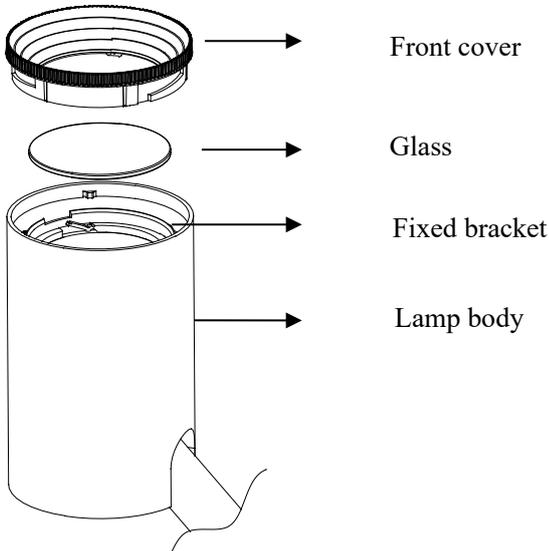


2. For honeycomb accessories, please refer to the specification sheet. Instructions for replacing honeycomb:

- a. Take out the front cover and hang it on the lamp body, then install the honeycomb into the fixed bracket, as shown in the following figure;
- b. Install the front cover into the lamp body and tighten it counterclockwise as shown in the following figure.

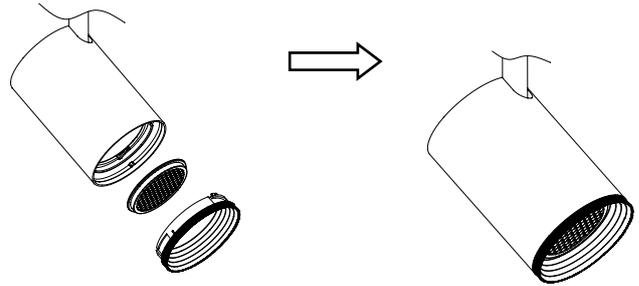

3. For the accessories of the spotlight, please refer to the specification book. Instructions for disassembling and replacing the spotlight:

- a. Remove the front cover and install the honeycomb (or other accessories) into the fixed bracket, as shown in the following figure;
- b. Install the spotlight tube into the lamp body and tighten it counterclockwise as shown in the figure.

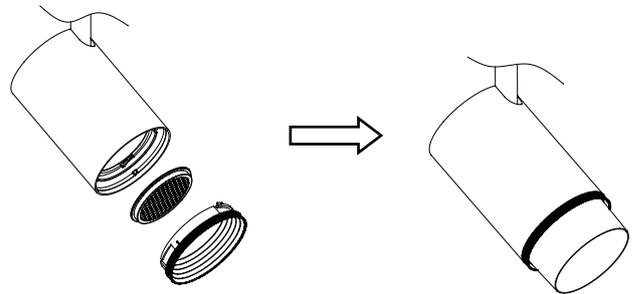

**Note:** When replacing accessories, the spotlight and honeycomb can be installed simultaneously.